

2026 Rebuild Alabama
TALLADEGA COUNTY
TCP 61-01-26

Scope of Work: Micro- Surfacing, Temporary Centerline Stripe, Class 2T Type A Center and Edge line Striping for Nine (9) County Roads located throughout Talladega County.

Advertising Dates: February 25, March 4, & March 11

Bids Due on: March 23, 2026 @ 10:00AM

Bids Opened on: March 23, 2026 as soon thereafter as practicable.

Address: Talladega County Commission

1 Court Square

Talladega, Alabama 35160

OR

Talladega County Commission

P.O. Box 6170

Talladega, Alabama 35161

Plans can be seen at the Talladega County Website:

TalladegaCountyAl.Org

I Want To

Alabama Rebuild Projects

FY2026

https://www.talladegacountyal.org/rebuild_alabama/index.php

Contact our office for suggestions of questions:

Talladega County Highway Department: 6:30AM to 3:00PM

Phone: 256 761-2130

Contact Persons: Larry Roberson or Shawn McComb

**MODEL BID ADVERTISEMENT
PROJECT SPECIFIC**



Rebuild Alabama Act Model Bid Advertisement



Advertisement for Bid **Talladega County**

Talladega County is taking sealed bids for labor, equipment, materials, and any incidentals required to complete the work required for **Project TCP 61-01-26** (Micro surfacing and Striping various Roads at nine (9) Sites: Spring Valley Road, Jackson Trace Road, Plantersville Road, Berney Station Road, Old Sylacauga Highway, Odens Mill Road, Cedars Road, Twin Churches Road, and Harper Springs Road). This bid is intended to comply with the Rebuild Alabama Act, Act No. 2019-2, as amended, and the Alabama Public Works Law, Alabama Code Title 39, as amended. Bidders shall be required to comply with the provisions of the Rebuild Alabama Act, Act No. 2019-2, as amended, and the Alabama Public Works Law, Alabama Code Title 39, as amended, regardless if the requirement is explicitly detailed in the bid proposal or not.

Sealed bids will be received by the Talladega County Commission at P.O. Box 6170; Talladega, Al.35161 or 1 Court Square; Talladega, Al. 35160 until 10:00 AM Central Time on March 23, 2026, and then publicly opened as soon thereafter as practicable. Award will be made at the next regularly scheduled meeting of the Talladega County Commission.

Specifications are on file and may be acquired at the Talladega County, Alabama, Engineering Department, 820 Hwy. 275; Talladega, Al. 35160.

Phone Number: (256)761-2130

Plans viewed at: https://www.talladegacountyal.org/rebuild_alabama/bids/index.php

Talladega County Hours of Operation are 6:30 A.M. to 3:00 P.M. (Central Time) from Monday through Friday.

County reserves the right to reject all Bids or any portion thereof.

MODEL BID INVITATION - PROJECT SPECIFIC



County Rebuild Alabama Fund ACEA Model Project Specific Contract



PROPOSAL NO. 1

March 23, 2026

FOR THE CONSTRUCTION OF COUNTY PROJECT
PROJECT NO. TCP 61-01-26

Talladega COUNTY, ALABAMA

Proposal of
Contractor Name: _____

Of (City, State): _____

ALDOT Contractor Identification Number: _____
(To be used to document E-Verify)

Alabama General Contractors License Number: _____

For constructing the following:

Micro surfacing and Striping various Roads at nine (9) Sites: Spring Valley Road, Jackson Trace Road, Plantersville Road, Berney Station Road, Old Sylacauga Highway, Odens Mill Road, Cedars Road, Twin Churches Road, and Harper Springs Road.

The plans are composed of the drawings identified as follows:
County Project No. TCP 61-01-26

The specifications are hereto attached.

In order to be considered, proposals must be received at the location and time below:

Talladega County Commission
P.O. Box 6170; Talladega, Al.35161 or 1 Court Square; Talladega, Al. 35160
Phone: (256)362-1357

BEFORE: 10:00 AM ON March 23, 2026

Bids will be opened as soon thereafter as practicable. Award will be made at the next regularly scheduled meeting of the Talladega County Commission.

Bidder's Initials: _____



County Rebuild Alabama Fund ACEA Model Project Specific Contract



INSTRUCTIONS TO BIDDERS

1. PREPARATIONS OF BIDS:

Forms furnished, or copies thereof, shall be used, and strict compliance with the requirements of the invitation, these instructions, and the instructions printed on the forms is necessary. Special care should be exercised in the preparation of bids. Bidders must make their own estimates of the facilities and difficulties attending the performance of the proposed contract, including local conditions, uncertainty of weather, and all other contingencies. All designations and prices shall be fully and clearly set forth. The proper space in the bid and guaranty/bid bond forms shall be suitably filled in.

2. LABOR AND MATERIALS NOT TO BE FURNISHED BY TALLADEGA COUNTY, ALABAMA:

The County Commission of Talladega County, Alabama, will not furnish any labor, material, or supplies unless specifically provided in the Contract.

3. SIGNATURE TO BIDS:

Each bid must give the full business address of the Bidder and must be signed by the Bidder with their usual signature. Bids by partnerships must furnish the full names of all partners and must be signed with the partnership name by one of the members of the partnership, or by an authorized representative, followed by the signature and designation of the person signing. Bids by corporations must be signed with the legal name of the corporation followed by the name of the State of Incorporation and by the signature and designation of the president, secretary, or other person authorized to bind it in the matter. The name of each person shall also be typed or printed below the signature. A bid by a person who affixes to this signature the word "president," "secretary," "agent," or other designation without disclosing his principal, may be held to be the bid of the individual signing. When requested by the County Commission of Talladega County, Talladega County, Alabama, satisfactory evidence of the authority of the officer signing in behalf of the corporation shall be furnished.

4. BIDS FOR ALL OR PART:

Each project will be bid separately unless otherwise expressly requested in the Proposal. Combination bids, that are bids on separate projects lumped together as a single bid or on all or none bid or on all or none basis, will not be accepted unless the Proposal expressly requests or permits same.

5. ALTERNATE BIDS:

Alternate bids will not be considered unless called for.

Bidder's Initials: _____



County Rebuild Alabama Fund ACEA Model Project Specific Contract



6. SPECIFICATIONS AND SCHEDULES:

The specifications, conditions, schedules and drawings which form the basis of any bid will be considered as a part thereof and will form a part of the Contract.

Copies of these papers, together with a copy of the standard contract form, including authorized additions, or deletions, if any, will be furnished to or made available for the inspection of bidders by the office indicated in the advertisement of invitation.

7. CORRECTIONS:

Erasures, white-outs, or other changes in the bids must be initialed by the bidder.

8. OWNER:

Where the word "Owner" appears herein, the same refers to Talladega County, Alabama, and includes the County Commission of Talladega County, its governing body.

9. GUARANTY, BONDS AND INSURANCE:

Security is required to insure the execution of Contract and for performance of the services, and no bid will be considered unless it is so guaranteed. The bidder must furnish with his bid a bid bond or cashier's check drawn on an Alabama bank in the amount of 5% of his bid price, but in no event more than ten thousand dollars (\$10,000.00) payable to Talladega County Commission, of Talladega County, Alabama. Cashier's check or bid bonds, will, at the option of the Owner, be paid into the funds of Talladega County Commission as liquidated damages upon failure of the successful bidder to execute the written contract and furnish the performance bond, payment bond, and insurance coverages as hereinafter required, within fifteen (15) consecutive calendar days following written notice of the award of the Contract unless an extension is granted, in writing, by an authorized representative of Talladega County, Alabama.

10. BONDS AND INSURANCE:

The bonds and insurance policies of any surety company or insurance company respectively, authorized to do business in the State of Alabama, will be accepted as security and insurance as required for any bid or contract. See the instructions hereinafter contained and the applicable standard forms with respect to the type, form, and amounts of required bonds and insurance policies.

11. MARKING AND MAILING BIDS:

Bids, with their guarantee, must be securely sealed in suitable envelopes, addressed and marked on the outside "County Commission of Talladega County, Bids for TCP 61-01-26, to be opened March 23, 2026." (List Project Number, Alabama General Contractor License Number and Names on envelope.)

Bidder's Initials: _____



County Rebuild Alabama Fund ACEA Model Project Specific Contract



12. TIME FOR RECEIVING BIDS:

Bids received prior to the time of opening will be securely kept, unopened. The Owner will decide when the specified time has arrived, and no bid will be considered if received thereafter, except that when a bid arrives by mail after time for opening, but before award is made, and it is shown to the satisfaction of the Owner that the non-arrival on time was due solely to delay in the mails for which the bidder was not responsible, such bid may be received and considered. No responsibility will attach to Talladega County or the County Commission for the premature opening of a bid not properly addressed or identified. Unless specifically authorized, telegraphic bids will not be considered, but modifications by telegraph of bids already submitted will be considered if received prior to the hour set for opening.

13. WITHDRAWAL OF BIDS:

Bids may be withdrawn on written or telegraph request received from bidders prior to the time fixed for opening. Negligence on the part of the Bidder in preparing the bid confers no right for the withdrawal of the bid after it has been opened.

14. BIDDERS PRESENT:

At the time fixed for the opening of bids, their contents will be made public for the information of bidders and others properly interested who may be present either in person or by representation.

15. AWARD OR REJECTION OF BIDS:

The Contract will be awarded to the lowest responsive and responsible bidder complying with conditions of the invitation for bids, provided his bid is reasonable and it is in the interest of the Owner to accept it. The bidder to whom the award is made will be notified at the earliest possible date. The Owner, however, reserves the right to reject any and all bids and to waive any informality in bids received whenever such rejection or waiver is in the interest of the Owner. It also reserves the right to reject the bid of a bidder who has previously failed to perform properly or complete on time contracts of a similar nature, or a bid of a bidder who is not, in the judgment of the Owner, in a position to perform the Contract.

16. BIDDERS INTERESTED IN MORE THAN ONE BID:

If more than one bid is offered by any one party, by or in a name of his clerk, partner, corporation in which he has a substantial interest, or in which he is an officer, or other person, all such bids may be rejected. A party who has quoted prices on materials to a bidder is not thereby disqualified from quoting prices to other bidders or from submitting a bid directly for the materials or work. The County Commission of Talladega County reserves the right to determine in its discretion whether the provisions of this clause have been violated by any bidder.

Bidder's Initials: _____



County Rebuild Alabama Fund ACEA Model Project Specific Contract



17. ERRORS IN BIDS:

Bidders or their authorized agents are expected to examine the maps, drawings, specifications and all other instructions pertaining to the work, which will be open to their inspection. Failure to do so will be at the Bidder's own risk, and he cannot secure relief on the plea of error in the bid. In case of error in the extension of prices, the unit price will govern.

18. CONTRACT AND BOND:

The bidder to whom award is made must, when requested, enter into written contract on the standard form as set out herein, with satisfactory security in the amount required, within the period specified, or, if no period be specified, within 15 days after the required forms are presented to him for signature.

19. COLLUSION:

If there is any reason for believing that collusion exists among the Bidders any or all Proposals may be rejected, and those participating in such collusion may be barred from submitting bids on the same or other work with the County.

20. SUBLETTING OR ASSIGNING OF CONTRACT:

(a) Limitations. The Contractor shall not sublet, assign, transfer, convey, sell, or otherwise dispose of any portion of the contract, his right, title or interest therein, or his power to execute such contract, to any person, firm or corporation without written consent of the County, and such written consent shall not be construed to relieve the Contractor of any responsibility for the fulfillment of the contract. Unless otherwise stipulated in the proposal or special provisions, the Contractor shall perform with his own organization, and with the assistance of workmen under his immediate superintendence and reported on his payroll, all contract work of a value not less than 30 percent of the total contract amount, except that any items designated in the contract as "Specialty Items" so performed by subcontract may be deducted from the total contract amount before computing the amount of work required to be performed by the Contractor with his own organization.

(b) Subcontractor's Status: A Subcontractor shall be recognized only in the capacity of an employee or agent of the Contractor and the Contractor will be responsible to the County for all of the subcontractor's work, including failures or omissions; and his removal may be required by the Engineer, as in the case of an employee.

21. PROSECUTION OF WORK:

(a) Notice of Intent: The Contractor shall give the Engineer definite notice of his intention to start work at least 72 hours in advance of beginning work and at least 24 hours in advance of beginning particular features of construction, such as driving piles, placing concrete, etc. Should prosecution of the work be discontinued by the Contractor with the consent of the Engineer, the Contractor shall give the Engineer at least 48 hour notice in writing before resuming operations.

(b) General: The Contractor shall prosecute the work continuously and diligently in the order and manner set out in his schedule as approved by the Engineer. He shall provide sufficient satisfactory

Bidder's Initials: _____



County Rebuild Alabama Fund ACEA Model Project Specific Contract



materials, labor, and equipment to insure that the work will be completed in a satisfactory manner within the time specified in the contract.

Should the Contractor fail to maintain a satisfactory rate of progress, the Engineer will require that additional forces and equipment be placed on the work to bring the project up to schedule and maintain it at that level.

Should the Contractor fail to furnish sufficient satisfactory equipment and labor for maintaining the quality and progress of the work at satisfactory level, the Engineer may withhold all estimates which are or may become due until satisfactory quality and progress are maintained; or the contract may be annulled.

Bidder's Initials: _____



County Rebuild Alabama Fund ACEA Model Project Specific Contract



PROPOSAL FOR PROJECT NO. TCP 61-01-26 TALLADEGA COUNTY, ALABAMA

TO: The County Commission of Talladega County, Alabama

Dear Sirs:

The following proposal is made on behalf of Talladega County and no others. Evidence of authority to submit the proposal is herewith furnished. The proposal is made without collusion on the part of any person, firm, or corporation. This bid offering is intended to comply with the Rebuild Alabama Act, Act No. 2019-2, as amended, and the Alabama Public Works Law, Alabama Code Title 39, as amended. Bidders shall be required to comply with the provisions of the Rebuild Alabama Act, Act No. 2019-2, as amended, and the Alabama Public Works Law, Alabama Code Title 39, as amended regardless if the requirement is explicitly detailed in the bid proposal or not.

Sealed bids will be received by the Talladega County Commission at P.O. Box 6170; Talladega, Al. 35161 OR 1 Court Square; Talladega, Al. 35160 until 10:00 AM Central Time on March 23, 2026, and then publicly opened as soon thereafter as practicable. Award will be made at the next regularly scheduled meeting of the Talladega County Commission.

This project is being advertised, let to contract, and administered by an awarding authority other than the Alabama Department of Transportation (ALDOT). All references made in the standard specifications and in other related and included documents of this proposal, to ALDOT (except as applies to references made to ALDOT considering a bidder to be disqualified from bidding, or to the awarding authority consulting or interacting with ALDOT, etc.), the "State", the "Department" or "Highway Department", etc. shall be understood to mean the awarding authority for this project.

The undersigned certifies that he or she has carefully examined the plans for this project and the specifications hereto attached including the special provisions and have also personally examined the site of work. On the basis of the specifications and plans the undersigned proposes to furnish all necessary machinery, tools, apparatus, and other means of construction, and do all the work and furnish all the material in the manner specified.

The undersigned further agrees to complete all the work in:

_____ () Working Days
 X (153) Calendar Days (May 01, 2026 to September 30, 2026)

as defined in the current revision of the Alabama Department of Transportation Standard Specifications. Each project shall designate the number of working days or calendar days allowed. Should the undersigned fail to complete the project or projects awarded within the working days or calendar days stipulated, liquidated damages shall be assessed as defined in section 108.10 in the current revision of the Alabama Department of Transportation Standard Specifications or as amended by Special Provision.

The undersigned understands that the quantities below are approximate only and are subject to either increase or decrease, and hereby propose to perform any increased or decreased quantities of work at the unit price bid, subject to adjustments as specified in Section 104 of the Alabama Department of Transportation Standard Specifications for Highway Construction 2018, non-metric edition. The undersigned further understands and specifically agrees that in making this proposal, in case of error in the extension of prices in the bid, the unit price will govern.



County Rebuild Alabama Fund ACEA Model Project Specific Contract



By signing this contract, the contracting parties affirm, for the duration of the agreement, that they will not violate federal immigration law or knowingly employ, hire for employment, or continue to employ an unauthorized alien within the State of Alabama. Furthermore, a contracting party found to be in violation of this provision shall be deemed in breach of the agreement and shall be responsible for all damages resulting therefrom.

The undersigned further proposes to begin the work within fifteen (15) days of receiving the Proceed Order should he/she be awarded the bid and to complete the work within the time specified.

Enclosed is a cashier's check, drawn on an Alabama bank, or a bidder's bond, payable to Talladega County, for an amount not less than five percent (5%) of the amount bid, but in no event more than ten thousand dollars (\$10,000.00), as a bid guaranty. The undersigned hereby agrees that in case of his/her failure to execute a Contract and furnish the Performance Bond, the Payment Bond, and a certificate of insurance coverage as specified within fifteen (15) days after notice of award, the awarding authority shall retain from the proposed guaranty if it be a cashier's check, or recover from the principal or the sureties if the guaranty be a bid bond, the difference between the amount of the contract as awarded and the full amount of the proposal of the next lowest responsible bidder. If no other bids are received, the full amount of the proposal guaranty shall be so retained or recovered as liquidated damages for such default. It is understood that in case the work is not awarded to the undersigned, the check will be returned as provided in the Specifications hereto attached. The bidder's bond shall be prepared on the form attached to this proposal and issued by a surety company authorized to do business in the State of Alabama.

Upon notification of award of the bid, the undersigned, within fifteen (15) days, proposes to furnish a Performance Bond equal to 100% of the total amount of the bid and a Payment Bond equal to 50% of the total amount of the bid to Talladega County. The undersigned also proposes to furnish a certificate of insurance coverage in the amounts specified in this proposal.

The undersigned shall submit the Advertisement of Project Completion to Talladega County immediately following the completion and acceptance of all work required. The County Engineer will submit the advertisement to the Association of County Commissions of Alabama (ACCA) to be posted on a website maintained by ACCA for a period of four consecutive weeks.

Upon completion and acceptance of all work required, the undersigned will be paid upon presentation of the following:

- a. A properly executed and duly certified voucher for final payment.
- b. A release of all claims and claims of liens against the awarding authority arising by virtue of the contract.
- c. Proof of Advertisement of project completion (AL Code 39-1-1(f) requires a 30-day waiting period after the notice has run before final settlement can be made)

The undersigned agrees: Final payment will be made within 35 days after all the above requirements are met; Partial Payments, to be paid no more than monthly, shall be provided under this contract.



County Rebuild Alabama Fund ACEA Model Project Specific Contract



BID ITEMS

PROJECT NO: TCP 61-01-26

The following items shall be constructed in accordance with the Alabama Department of Transportation Standard Specifications for Highway Construction, 2018 non-metric edition, except as modified herein.

NOTES:

1. The following unit prices shall include all labor, materials, equipment, equipment rental, overhead, profit, insurance, etc., to cover the finished work of the several kinds called for.
2. Bidder understands that the Owner reserves the right to reject any and all bids.

Item No.	Description	Quantity	Unit	Unit Price	Bid Amount
403B-000	Micro-Surfacing Seal Coat, Type II	7367	Ton		
600A-000	Mobilization	1	LS		
701A-030	Solid White, Class 2T, Type A Traffic Stripe	77	Mile		
701A-034	Solid Yellow, Class 2T, Type A Traffic Stripe	48	Mile		
701A-044	Broken Yellow, Class 2T, Type A Traffic Stripe	21	Mile		
701C-000	Broken Temporary Traffic Stripe	21	Mile		
701C-001	Solid Temporary Traffic Stripe	48	Mile		
703A-004	Traffic Control Markings, Class 2T, Type A	660	SQFT		
703B-004	Traffic Control Legends, Class 2T, Type A	342	SQFT		
740B-000	Construction Signs	288	SQFT		
740E-000	Cones (36 Inches High)	50	Each		
740M-001	Ballast For Cones	50	Each		
740O-000	Pilot Car	1	Each		
				TOTAL	

The undersigned hereby states that this Bid Proposal is to the best of their knowledge; their true and correct bid, except for changes initiated herein, and is submitting these bid items for review and consideration.



County Rebuild Alabama Fund ACEA Model Project Specific Contract



Signature of Bidder (If Firm or Individual) _____

By: _____

Address of Bidder _____

Name and Address of Member of Firm _____

Signature of Bidder(Corporation) _____

_____ Business Address _____

President

_____ Business Address _____

Secy. & Treas.

Attest: _____ Incorporated in _____

State

(Corporate Seal)

BIDS WILL NOT BE CONSIDERED UNLESS THIS FORM FOR BID BOND IS USED AND IS SIGNED IN INK BY PRINCIPAL AND SURETY.



County Rebuild Alabama Fund ACEA Model Project Specific Contract



BID BOND

KNOW ALL MEN BY THESEPRESENTS:

That _____ of
(Name of Contractor)

(Address)

as Principal, and _____ of
(Name of Surety)

_____, as Surety,
(Address)

are held firmly bound unto TALLADEGA COUNTY COMMISSION, a Political Subdivision of and Body Corporate in the State of Alabama as Obligee, in the full and just sum of FIVE PERCENT (5%) OF AMOUNT BID (Maximum Amount of Bond \$10,000), lawful money of the United States, for the payment of which sum, well and truly to be made, we bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents. WHEREAS, the said Principal is herewith submitting its proposal for Micro surfacing and Striping various Roads at nine (9) Sites: Spring Valley Road, Jackson Trace Road, Plantersville Road, Berney Station Road, Old Sylacauga Highway, Odens Mill Road, Cedars Road, Twin Churches Road, and Harper Springs Road.

The condition of this obligation is such that if the aforesaid Principal shall be awarded the contract the said Principal will, within the time required, enter into a formal contract and give a good and sufficient bond to secure the performance of the terms of and conditions of the Contract, then this obligation to be void; otherwise, the Principal and the Surety will pay unto the Obligee the difference in money between the amount of the Contract as awarded and the amount of the proposal of the next lowest responsible bidder, which amount shall not exceed \$10,000. If no other bids are received, the full amount of the proposal guarantee shall be so retained or recovered as liquidated damages for such default.

Witness our hands and seals this _____ day of _____, 20_____.

Signature of Individual Bidder: (Use only where bidder is an individual)

_____, Doing business as _____
(Name of Individual) (Business Name)

Business Mailing Address: _____



County Rebuild Alabama Fund
ACEA Model Project Specific Contract
(Mailing Address)



Bid Bond Project TCP 61-01-26

Name of Corporation, Partnership, or Joint Venture:

(Name of Partnership, Joint Venture or Corporation)

Business Mailing

Address: _____

(Address)

BY: _____(L.S.)
(Signature and Position or Title of Officer
Authorized to Sign Bids and Contracts for Firm)

Business Mailing

Address: _____

(Address)

BY: _____(L.S.)
(Signature and Position or Title of Officer
Authorized to Sign Bids and Contracts for Firm)

Business Mailing

Address: _____

(Address)

BY: _____(L.S.)
(Signature and Position or Title of Officer
Authorized to Sign Bids and Contracts for Firm)

(Corporate Seal)
Attest:

(Secretary)

Name of State under the laws of which the
Corporation was chartered:

(State)

(Corporate Seal)
Attest:

(Secretary)

Name of State under the laws of which the
Corporation was chartered:

(State)

SURETY: _____
(Name of Surety)

(Attorney in Fact)
BY (AGENT): _____



County Rebuild Alabama Fund
ACEA Model Project Specific Contract
(Attorney in Fact)



AGENT'S ADDRESS: _____



County Rebuild Alabama Fund ACEA Model Project Specific Contract



(Mailing Address)

NOTICE: Valid Power of Attorney Must Be Attached.



County Rebuild Alabama Fund ACEA Model Project Specific Contract



INSURANCE REQUIREMENTS

The Contractor, at its sole expense, shall obtain and maintain in full force the following insurance to protect the Contractor and the County Commission of Talladega County, Alabama (CCTC) at limits and coverages specified below. These limits and coverages specified are the minimum to be maintained and are not intended to represent the correct insurance needed to fully and adequately protect the Contractor. The requirements shown for "large projects" are for those projects whose bid are greater than or equal to \$250,000. The requirements shown for "small projects" are for those with bids less than \$250,000.

All insurance will be provided by insurers licensed to conduct business in the State of Alabama and shall have a minimum A.M. Best rating of A- VII and must be acceptable to the CCTC. Self-insured plans and/or group funds not having an A.M. Best rating must be submitted to the CCTC for prior approval.

No work shall be performed until proof of compliance with the insurance requirements has been received by the CCYC.

(a) Worker's Compensation and Employers Liability

Part One: Statutory Benefits as required by the State of Alabama

Part Two: Employers Liability

	<u>Large Projects</u>	<u>Small Projects</u>
Each Accident	\$3,000,000	\$500,000
Each Employee	\$3,000,000	\$500,000
Policy Limit	\$3,000,000	\$500,000

- i. U. S. Longshoremen & Harbor workers 'Act (USL&H)
–Required if contract involves work near a navigable waterway that may be subject to the USL&H law.
- ii. Maritime Endorsement (Jones Act) –
Endorsement required if contract involves the use of a Vessel.
Or include coverage for "Master or Members or Crew" under "Protection and Indemnity" coverage

	<u>Large Projects</u>	<u>Small Projects</u>
Bodily Injury by accident (Each Accident)	\$3,000,000	\$500,000
Bodily Injury by disease (Aggregate)	\$3,000,000	\$500,000



County Rebuild Alabama Fund ACEA Model Project Specific Contract



(b) Commercial General Liability

Coverage on an Occurrence form with a combined single limit (Bodily Injury and Property Damage combined) as follows:

	<u>Large Projects</u>	<u>Small Projects</u>
Each Occurrence	\$3,000,000	\$500,000
Personal and Advertising Injury	\$3,000,000	\$500,000
Products/completed	\$3,000,000	\$500,000
Operation Aggregate		
General Aggregate	\$3,000,000	\$500,000

- Coverage to include:
 - Premises and operations
 - Personal Injury and Advertising Injury
 - Independent Contractors
 - Blanket Contractual Liability
 - Explosion, Collapse and Underground hazards
 - Broad Form Property Damage
 - Products/Completed Operations - This shall remain in effect for 24 months beyond completion and acceptance by owner of the project, whichever is later.
 - Railroad Protective Liability Insurance if work involves construction, demolition or maintenance operations on or within 50 feet of railroad.

– The contractor shall name the CCTC, its officers, appointees, employees, and agents as additional insured for claims arising out of the Contractors and/or Subcontractors work. The ISO Form CG 20 10 11 85 or a comparable form that is no more restrictive shall be required. The Additional Insured form MUST include the current Operations and Products/Completed Operations of the contractor. The naming of the additional insured does not obligate the additional insured to pay any premiums due.

- Aggregate limits to be on a “per project” basis OR an Owners and Contractors Protective Liability Policy shall be provided in the name of CCTC, the contractor and Subcontractors. Limits to be the same as above Commercial General Liability.

(c) Automobile Liability

Covering all Owned, Non-Owned, and Hired vehicles with a Combined single limit (bodily injury and property damage combined) of \$3,000,000 each accident for **large** projects and \$500,000 for **small** projects. The policy shall name CCTC its officers, appointees, employees, and agents as an Additional Insured.



County Rebuild Alabama Fund ACEA Model Project Specific Contract



(d) **Protection and Indemnity Insurance**

If the contract involves work aboard an Owned, Non-Owned or Hired Vessel, Liability coverage in the amount of \$3,000,000 per occurrence shall be maintained.

(e) **Indemnification and Liability**

Under this section the term County shall include Talladega County, the Talladega County Commission, the officers, appointees, department heads, agents, and employees of the Talladega County Commission

The County shall not be liable for any injury to the person or property of any person, firm, or corporation resulting directly or indirectly from Contractor's performance of this Contract, and the Contractor assumes full and complete responsibility therefore.

The Contractor shall further indemnify the County and hold the County safe and harmless from any and all liability, lawsuits, judgments, attorney fees, and other costs incurred by the County in defending any claim or lawsuit made against the County by any person, firm, or corporation arising directly or indirectly out of the Contractor's work performed pursuant to this contract or any breach or alleged breach of duty or responsibility of the Contractor under the scope of this contract; the Contractor shall not be responsible for indemnifying the County for claims arising from the engineering or design decisions of the County or claims that are unrelated to the scope of the Contractor's work.

Waiver of Subrogation

The Workers Compensation Policy shall contain a Waiver of Subrogation in favor of the CCTC, its officers, appointees, employees, and agents.

Certificate of Insurance

A Certificate of Insurance evidencing the above minimum requirements must be provided to and accepted by the CCTC PRIOR to commencement of any work on the contract. Each policy shall be endorsed by the issuing insurer to provide thirty (30) days prior written notice of cancellation to the CCTC.



County Rebuild Alabama Fund
ACEA Model Project Specific Contract



END OF PROPOSAL



MODEL CONTRACT - PROJECT SPECIFIC



County Rebuild Alabama Fund ACEA Model Project Specific Contract



CONTRACT

THIS AGREEMENT made and entered into this _____ day of _____, 2026, by and between Talladega COUNTY, ALABAMA, a political subdivision of and Body Corporate in the State of Alabama, party of the first part (hereinafter called the COUNTY) and _____, party of the second part (hereinafter called the CONTRACTOR), WITNESSETH:

WHEREAS, the COUNTY desires the improvement and construction of a certain road hereinafter more particularly described and the CONTRACTOR desires to furnish and deliver all materials and to do and perform all the work and labor for the said purpose; and

WHEREAS, the County has awarded the contract in compliance with Title 39 of the Code of Alabama and the Rebuild Alabama Act, Act No. 2019-2; and

WHEREAS, The County certifies the following source of funds and their availability for the County's obligations under this contract:

Source of Sufficient Funds

- _____ County Funds
- _____ Grant Funds
- _____ Other Funds County Rebuild Alabama Funds

Availability of Funds

- _____ Above funds are held by Talladega County at contract execution
- _____ Above funds will become available following contract execution

NOW, THEREFORE, in consideration of the premises, the mutual covenants herein contained and the sum of one dollar (\$1.00) by each of the parties to the other in hand paid, the receipt whereof is hereby acknowledged, the parties hereto agree as follows:

1. The CONTRACTOR promises and agrees to furnish and deliver all the material and to do and perform all the work and labor required to be furnished and delivered, done and performed in and about the improvement and construction of a road in, Talladega COUNTY, known as **PROJECT NUMBER TCP 61-01-26** in strict and entire conformity with the provisions of the Contract, and the Notice to Contractors and the Proposal, and the Plans and Specifications (including Supplemental Specifications) prepared (or approved) by the County Engineer, the originals of which are on file in the Office of the County Engineer of Talladega County, and which said Plans and Specifications, Notice to Contractors, Bid Documents, and the Proposal (copy attached) are hereby made apart of this Agreement as fully and to the same effect as the same had been set forth at length in the body of this Agreement.



County Rebuild Alabama Fund ACEA Model Project Specific Contract



2. The COUNTY agrees and promises to pay to the CONTRACTOR for said Work in compliance with the provisions of Rebuild Alabama Act, Act No. 2019-2, as amended, and the Alabama Public Works Law, Alabama Code Title 39, as amended, when completed in accordance with the terms set forth in this Contract, which includes the Bid Items & Specifications, Bid Proposal, Insurance Requirements, Bid Bond, Performance Bond, Payment Bond; upon the terms and at the price as set forth in the Bid Proposal, payments made as provided in said Bid Items & Specifications upon presentation of the proper certificates of Talladega County.

3. The said work shall be done in accordance with the laws of the State of Alabama under the direct supervision, and to the entire satisfaction of the County Engineer of Talladega County or his representatives.

4. The decision of the County Engineer of Talladega County upon any question connected with the execution of this Agreement or any failure or delay in the prosecution of the Work by the said CONTRACTOR shall be final and conclusive.

IN WITNESS WHEREOF, Talladega COUNTY has caused these present to be executed by Malley Limbaugh, CHAIRMAN/PRESIDENT of the Talladega COUNTY COMMISSION AND _____, THE CONTRACTOR,
(Name of Contractor)

has hereto set his/her hand and seal this day and year above written.

THE TALLADEGA COUNTY COMMISSION OF
TALLADEGA COUNTY, ALABAMA

By: _____
Chairman

Attest:

(SEAL)

(County Administrator)



County Rebuild Alabama Fund ACEA Model Project Specific Contract



NAME OF CONTRACTOR: _____
(Individual, Partnership, Joint Venture or

Corporation) ALABAMA CONTRACTOR'S LICENSE NUMBER: _____

By: _____
(Contractor's Signature)

(Witness)

(Print Name)

(Print Name)

(Title)

(Title)

By: _____
(Contractor's Signature)

(Witness)

(Print Name)

(Print Name)

(Title)

(Title)

By: _____
(Contractor's Signature)

(Witness)

(Print Name)

(Print Name)

(Title)

(Title)

I, _____, certify that I am the _____
(Name) (Title)

of the Corporation named as Contractor herein, that _____ who
(Name of person signing for contractor)

signed this Contract on behalf of the Contractor, was then _____ of
(Title of Person Signing)

said Corporation; that said contract was duly signed for and in behalf of said corporation by authority of its governing body, and is within the scope of its corporation by authority of its corporate powers.

(Corporate Seal)



County Rebuild Alabama Fund ACEA Model Project Specific Contract



STATE OF ALABAMA]
COUNTY OF TALLADEGA

I, the undersigned authority, a Notary Public in and for said State and County, hereby certify that _____ whose name as _____
(Name of Person Signing Contract) (Title of Person Signing)

of a corporation, is signed to the foregoing (Name of Individual, Partnership, Joint Venture or Corporation)

instrument, and who is known to me, acknowledged before me on this day, that being informed of the contents of the within instrument, he, as such officer and with full authority executed the same voluntarily and as the act of said corporation.

Given under my hand and Official Seal this the _____ day of _____, 20__.

NOTARY PUBLIC, _____ COUNTY, ALABAMA

(NOTARY SEAL)

My commission expires

STATE OF ALABAMA]
COUNTY OF _____]

I, _____, a Notary Public in and for said State and County, hereby certify that _____ and _____, whose names as President/Chairman and Administrator, respectively, of the _____ COUNTY COMMISSION of _____ COUNTY, a body corporate and politic, are signed to the foregoing instrument and who are known to me, acknowledged before me on this day, that, being informed of the contents of the instrument, they as such officers and with full authority, executed the same voluntarily on the day the same bear's date.

Given under my hand and notarial seal on this the _____ day of _____, 20__.

NOTARY PUBLIC, _____ COUNTY, ALABAMA

My commission expires



County Rebuild Alabama Fund ACEA Model Project Specific Contract



INSTRUCTIONS FOR BONDS

1. The full name (given, initial, surname) and residence of each individual party to the Bonds must be inserted in the first paragraph.
2. If the Principal is a partnership, the full name of all partners must be inserted in the first paragraph which must recite that they are the partners composing the partnership (to be named) and all partners must execute the Bonds as individuals.
3. The State of Incorporation of each corporate party to bonds must be inserted in the first paragraph and the Bonds must be executed under the Corporate Seal of each party attested by its secretary or other appropriate Officer.
4. The date of the Bonds must not be prior to the date of the Contract.



County Rebuild Alabama Fund ACEA Model Project Specific Contract



PERFORMANCE BOND

KNOW ALL MEN BY THESE PRESNETS: That we _____
_____ hereinafter called the Principal, and
(Insert here the name & address of legal title of the Contractor)

(Insert here the name and address of legal title of one or more sureties)
hereinafter called the Surety or Sureties, are held and firmly bound unto the Talladega County Commission, a political subdivision of and Body Corporate in the State of Alabama, hereinafter called the Owner in the penal sum of _____ Dollars (\$ _____) for the payment whereof the Principal and the Surety or Sureties bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, firmly, by these presents.

WHEREAS, the Principal has, by means of a written agreement, dated _____
(Date of Contract)

entered into a contract with the Owner for:

Micro surfacing and Striping various Roads at nine (9) Sites: Spring Valley Road, Jackson Trace Road, Plantersville Road, Berney Station Road, Old Sylacauga Highway, Odens Mill Road, Cedars Road, Twin Churches Road, and Harper Springs Road. Project Number TCP 61-01-24

which agreement is by reference made a part hereof,

NOW THEREFORE, The conditions of this obligation is such that if the Principal shall faithfully perform the Contract on his part, and satisfy all claims and demands, incurred for the same, and shall fully indemnify and save harmless the Owner, its officers, appointees, employees, and agents from all cost and damage which he may suffer by reason of failure to do so, and shall reimburse and repay the Owner all outlay and expense which the Owner may incur in making good for any such default thence this obligation shall be null and void; otherwise, it shall remain in full force and effect.

PROVIDED, HOWEVER, that no suit, action or proceedings, by reason of any default whatever be brought on his Bond after twelve months from the day on which the final payment under the Contract falls due.

PROVIDED, further, that the said surety or sureties, for value received hereby stipulate and agree that no change, extension of time, or addition to the terms of the Contract or to the work to be performed thereunder of the Specifications thereof shall in any way effect their obligations on this bond, and they do hereby waive notice of any such change, extension of time, alteration or addition to the terms of the contract, or to the work, or to the Specifications.



County Rebuild Alabama Fund ACEA Model Project Specific Contract



PERFORMANCE BOND
Page 2 of 2

IN WITNESS WHEREOF, we have hereunto set our hands and seals, this the _____ day of _____, 20____, pursuant to the authority of the governing body of each of our respective parties.

NAME OF CONTRACTOR: _____
(Individual, Partnership, Joint Venture or Corporation)

By: _____
(Contractor's Signature)

(Print Name)

(Title)

(Witness)

(Print Name)

(Title)

By: _____
(Contractor's Signature)

(Print Name)

(Title)

(Witness)

(Print Name)

(Title)

By: _____
(Contractor's Signature)

(Print Name)

(Title)

(Witness)

(Print Name)

(Title)

NAME OF SURETY

By: _____
ATTORNEY-IN-FACT

NOTICE TO INSURANCE PRODUCER:
Please print or write legibly your name and complete address below including PRODUCER'S COMPANY

Countersigned by Alabama Licensed Insurance Producer for Surety, if applicable:

Producer's Name License No.

Address

PRODUCER'S COMPANY



County Rebuild Alabama Fund ACEA Model Project Specific Contract



PAYMENT BOND

KNOW ALL MEN BY THESE PRESENTS, that we _____

_____, as Principal, and _____
(Insert here the name & address of legal title of the Contractor)

_____ as Surety, are held and firmly
(Insert here the name and address of legal title of one or more sureties)

bound unto said _____ County Commission, a political subdivision of and body corporate in the State of Alabama, hereinafter called the Obligee, in the penal sum of _____ Dollars (\$_____) lawful money of the United States, for the payment of which sum and truly to be made, we bind ourselves, our heirs, personal representatives, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, said principal has entered into a certain Contract with said Obligee, dated _____ 20 . (Hereinafter called the Contract) for
(Date of Contract)

Micro surfacing and Striping various Roads at nine (9) Sites: Spring Valley Road, Jackson Trace Road, Plantersville Road, Berney Station Road, Old Sylacauga Highway, Odens Mill Road, Cedars Road, Twin Churches Road, and Harper Springs Road. Project Number TCP 61-01-26.

which Contract and the Specifications for said work shall be deemed a part hereof as fully as if set out herein.

NOW, THEREFORE, The Condition of this Obligation is such that if the said Principal and all subcontractors to whom any portion of the work in said contract is sublet and all assignees of said Principal and of such subcontractors shall promptly make payments to all persons supplying him or them with labor, materials, or supplies for or in the prosecution of the work provided for in such Contract, or any amendment or extension of or addition to said Contract, and for the payment of reasonable attorney's fees incurred by the successful claimant or plaintiffs in suits or claims against the contractor arising out of or in connection with the said contract, then the above obligation shall be void; otherwise to remain in full force and effect.

PROVIDED, HOWEVER, that this bond is subject to the following conditions and limitations.

(a) Any person, firm or corporation that has furnished labor, materials, or supplies for or in the prosecution of the work provided for in said Contract shall have a direct right to action against the Principal and Surety on this bond, which right of action shall be asserted in a proceeding, instituted in the County in which the work provided for in said Contract is to be performed or in any County in which said Principal or Surety does business. Such right of action shall be asserted in a proceeding instituted in the name of the claimant or claimants for his or their use and benefit against the Principal and Surety or either of them (but not later than one year after the final settlement of said Contract falls due) in which action such claim or claims shall be adjusted and judgment rendered thereon.



County Rebuild Alabama Fund ACEA Model Project Specific Contract



PAYMENT BOND
Page 2 of 3

- (b) The Principal and Surety hereby designate and appoint the President/Chairman of the County Commission of Talladega County, State of Alabama, or his successor or representative as the agent of each of them to receive and accept services of process or other pleading issued, or filed in any proceeding instituted on this bond and hereby consent that such service shall be the same as personal service on the Principal and/or Surety.
- (c) The Surety shall not be liable hereunder for any damages or compensation recoverable under Workmen's Compensation or Employer's Liability Statute.
- (d) In no event shall the Surety be liable for a greater sum than the penalty of this bond, or subject to any suit, action or proceeding, thereon that is instituted later than one year after the final settlement of said contract.
- (e) This Bond is given pursuant to §39-1-1 of The Code of Alabama, 1975 edition.

The remaining on this page is intentionally left blank.



County Rebuild Alabama Fund ACEA Model Project Specific Contract



PAYMENT BOND
Page 3 of 3

IN WITNESS WHEREOF, we have hereunto set our hands and seals, this the

_____ day of _____, 20____, pursuant to the authority of the governing body of each of our respective parties.

NAME OF CONTRACTOR: _____
(Individual, Partnership, Joint Venture or Corporation)

By: _____
(Contractor's Signature)

(Print Name)

(Title)

(Witness)

(Print Name)

(Title)

By: _____
(Contractor's Signature)

(Print Name)

(Title)

(Witness)

(Print Name)

(Title)

By: _____
(Contractor's Signature)

(Print Name)

(Title)

(Witness)

(Print Name)

(Title)

NAME OF SURETY

By: _____
ATTORNEY-IN-FACT

NOTICE TO INSURANCE PRODUCER:
Please print or write legibly your name and complete address below including PRODUCER'S COMPANY

Countersigned by Alabama Licensed Insurance Producer for Surety, if applicable:


Producer's Name License No.

Address

PRODUCER'S COMPANY

STATE	REFERENCE PROJECT NO	FISCAL YEAR	SHEET NO	LAST SHEET NO
AL	TCP 61-01-26	2026	1	9
CONTRACT ID NO				

Code No 4356 CSWA5 100023948 1

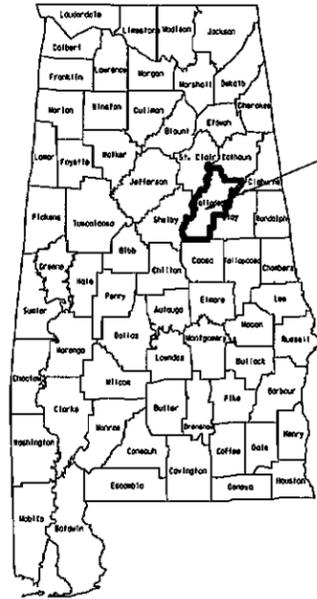

PROJECT LOCATION

TALLADEGA COUNTY HIGHWAY DEPARTMENT

PROJECT NUMBER TCP 61-01-26
REBUILD ALABAMA 2026
MICROSURFACE, STRIPE
VARIOUS ROADS AT 9 SITES:

- SITE 1-ON Spring Valley Road From City Limits of Sylacauga to Odena Road South
- SITE 2-ON Jackson Trace Road From City Limits of Talladega to Allen Road
- SITE 3-ON Plantersville Road From Grist Mill Road to Refroe Tower Road
- SITE 4-ON Berney Station Road From Whiting Road to State Hwy.77
- SITE 5-ON Old Sylacauga Hwy From U.S.280 to the Childersburg City Limits
- SITE 6-ON Odens Mill Road From Old Fayetteville Road to Kings Road
- SITE 7-ON Cedars Road From Cheaha Road to Munford High School
- SITE 8-ON Twin Churches Road From Ironaton Road to McElderry Road
- SITE 9-ON Harper Springs Road From State Hwy.21 to Oldfield Road

DESIGN DESIGNATION							
	SITE 1	SITE 2	SITE 3	SITE 4	SITE 5	SITE 6	SITE 7
ADT (2026)	880	700	1100	800	770	1019	500
ADT (2036)	1070	850	1340	975	938	1242	610
K							
D							
TDHV							
TADT	3	5	5	8	3	2	3
V (Design Speed)	30	45	45	45	45	45	45
Min Stopping Sight Dist	200	360	360	495	360	360	360

DESIGN DESIGNATION		
	SITE 8	SITE 9
ADT (2026)	500	700
ADT (2036)	610	850
K		
D		
TDHV		
TADT	3	2
V (Design Speed)	45	30
Min Stopping Sight Dist	360	200

INDEX TO SHEETS
SEE SHEET 1A

Existing Bridges: (Retain)

-  Site 2-Jackson Trace Road over Chocolocco Creek
Length =510 feet
-  Site 3-Plantersville Road over Talladega Creek
Two bridges Total Length =971 Feet
-  Site 4-Berney Station Road over Talladega and Dry Creek
Total Length =500 Feet

LOCATION MAPS FOR TALLADEGA COUNTY
SEE SHEET 1C FOR SITES 1,5,6,&9
SEE SHEET 1D FOR SITES 2 & 7
SEE SHEET 1E FOR SITES 3,4
SEE SHEET 1F FOR SITE 8

EQUATIONS:NONE
EXCEPTIONS: NONE

These plans have been prepared to conform with the Alabama Department of Transportation Standard Specifications for Highway Construction, 2022 Edition.



NOTE: The bidder's attention is directed to Subarticle 102.08(b), contained in the 2022 Standard Specifications concerning combination bids (County Financed Projects).

	SITE 1		SITE 2		SITE 3		SITE 4		SITE 5		SITE 6		SITE 7		SITE 8		SITE 9		PROJECT	
	SPRING VALLEY ROAD		JACKSON TRACE ROAD		PLANTERSVILLE ROAD		BERNEY STATION		OLD SYLACAUGA HWY		ODENS MILL		CEDARS ROAD		TWIN CHURCHES		HARPER SPRINGS		TOTAL	
	FEET	MILES	FEET	MILES	FEET	MILES	FEET	MILES	FEET	MILES	FEET	MILES	FEET	MILES	FEET	MILES	FEET	MILES	FEET	MILES
TOTAL STATIONING OF SITE/ PROJECT	6160		41185		30000		44428		14900		23475		12200		23150		7033		202531	
EQUATIONS & EXCEPTIONS	0		0		0		0		0		0		0		0		0		0	
NET LENGTH OF PROJECT	6160	1.17	41185	7.80	30000	5.68	44428	8.41	14900	2.82	23475	4.45	12200	2.31	23150	4.38	7033	1.33	202531	38.36
NET LENGTH OF BRIDGES	0	0.00	510	0.10	971	0.18	500	0.09	0	0.00	0	0.00	0	0.00	0	0.00	0	0.00	1981	0.38
NET LENGTH OF ROADWAYS	6160	1.17	40675	7.70	29029	5.50	43928	8.32	14900	2.82	23475	4.45	12200	2.31	23150	4.38	7033	1.33	200550	37.98

Submitted for Approval:

COUNTY ENGINEER

REFERENCE PROJECT NO	FISCAL YEAR	SHEET NO
TCP 61-01-26	2026	1A

INDEX TO SHEETS
 PROJECT NUMBER TCP 61-01-26
 REBUILD ALABAMA

SHEET NO.	DESCRIPTION
1	TITLE SHEET
1A	INDEX TO SHEETS
1B	INDEX TO SPECIAL & STANDARD HIGHWAY DRAWINGS
1C	LOCATION MAP- SITES 1,5,6,9 (Spring Valley, Old Sylacauga Hwy., Odens Mill, Harper Springs)
1D	LOCATION MAP-SITES 2,7 Jackson Trace, Cedars Road
1E	LOCATION MAP-SITES 3,4 Plantersville, Berney Station Road
1F	LOCATION MAP-SITE 8 (Twin Churches Road)
2	TYPICAL SECTION
2A	PROJECT NOTES
3	SUMMARY OF QUANTITIES
3A	SUMMARY OF QUANTITIES CONSTRUCTION SIGNS
3B	SUMMARY OF QUANTITIES TRAFFIC STRIPE, SITES 1,2,3
3C	SUMMARY OF QUANTITIES TRAFFIC STRIPE, SITES 4,5,6
3D	SUMMARY OF QUANTITIES TRAFFIC STRIPE, SITES 7,9
3E	SUMMARY OF QUANTITIES TRAFFIC STRIPE, SITE 8 & SUMMARY OF ALL SITES
3F	SUMMARY OF QUANTITIES MICRO SURFACING, MARKINGS, & LEGENDS
4	OMIT
5	OMIT
6	TRAFFIC CONTROL SUMMARY
7	TRAFFIC CONTROL PLAN DETAILS FOR LANE CLOSURE TWO LANE HIGHWAY PILOT CAR AND/OR CONE APPLICATION
8	TRAFFIC CONTROL PLAN STANDARD NOTE SHEET
9	TRAFFIC CONTROL PLAN STANDARD NOTE SHEET

SHEET TITLE	ROUTE
INDEX TO SHEETS	

REFERENCE PROJECT NO	FISCAL YEAR	SHEET NO
TCP 61-01-26	2026	1B

INDEX TO SPECIAL & STANDARD HIGHWAY DRAWINGS

PROJECT NUMBER TCP 61-01-26

THE FOLLOWING ARE SPECIAL OR STANDARD DRAWINGS CONTAINED IN THE ALABAMA DEPARTMENT OF TRANSPORTATION SPECIAL AND STANDARD HIGHWAY DRAWINGS BOOK (U. S. CUSTOMARY UNITS OF MEASUREMENT) DATED 2026 WHICH APPLY TO THIS PROJECT:


INDEX NO.	SPECIAL DRAWING NUMBER	DESCRIPTION
70101	PS-701-6	DETAILS OF TRAFFIC STRIPING FOR 2-LANE HIGHWAYS
70104	197-NPL	DETAILS OF NO PASSING LINES FOR TWO-LANE, TWO DIRECTIONAL ROADWAY
70301	TCM-703 (SHEET 1 OF 2)	PAVEMENT LEGENDS AND MARKINGS
70302	TCM-703 (SHEET 2 OF 2)	PAVEMENT LEGENDS AND MARKINGS
71017	IHS-710-12	DETAILS OF ROADWAY SIGN POST (SMALL CHANNEL AND TUBULAR SECTION)
710032	IHS-710-21	DETAILS FOR LOCATION AND MOUNTING STANDARD FLAT PANEL SIGNS ON U-CHANNEL AND TUBULAR POSTS
71035	IHS-710-23	LIGHTWEIGHT STRUCTURAL SIGN SUPPORT INSTALLATION
71070	SHS-11	STANDARD HIGHWAY SIGNS
73501	RRX-107-1	RAILROAD CROSSING PASSIVE WARNING- SIGNS AND PAVEMENT MARKERS
73507	RRX-107-3	DIMENSIONS FOR RAILROAD CROSSINGS SIGNS, SIGNALS, AND MARKINGS
74007	TCD-100	DETAILS FOR TRAFFIC CHANNELIZATION DEVICES

SHEET TITLE	ROUTE
INDEX TO SPECIAL & STANDARD HIGHWAY DRAWINGS	

LOCATION MAP-SITE 1, 5, 6, & 9
 PROJECT NO. TCP 61-01-26
 TALLADEGA COUNTY

REFERENCE PROJECT NO	FISCAL YEAR	SHEET NO
TCP 61-01-26	2026	1C

Site 1: Spring Valley Road (City Limits to Odena Road)
 Site 5: Old Sylacauga Hwy. (US280 to Childersburg City Limits)
 Site 6: Odens Mill Road (Old Fayetteville Road to Kings Road)
 Site 9: Harper Springs Road (AL21 to Oldfield Road)

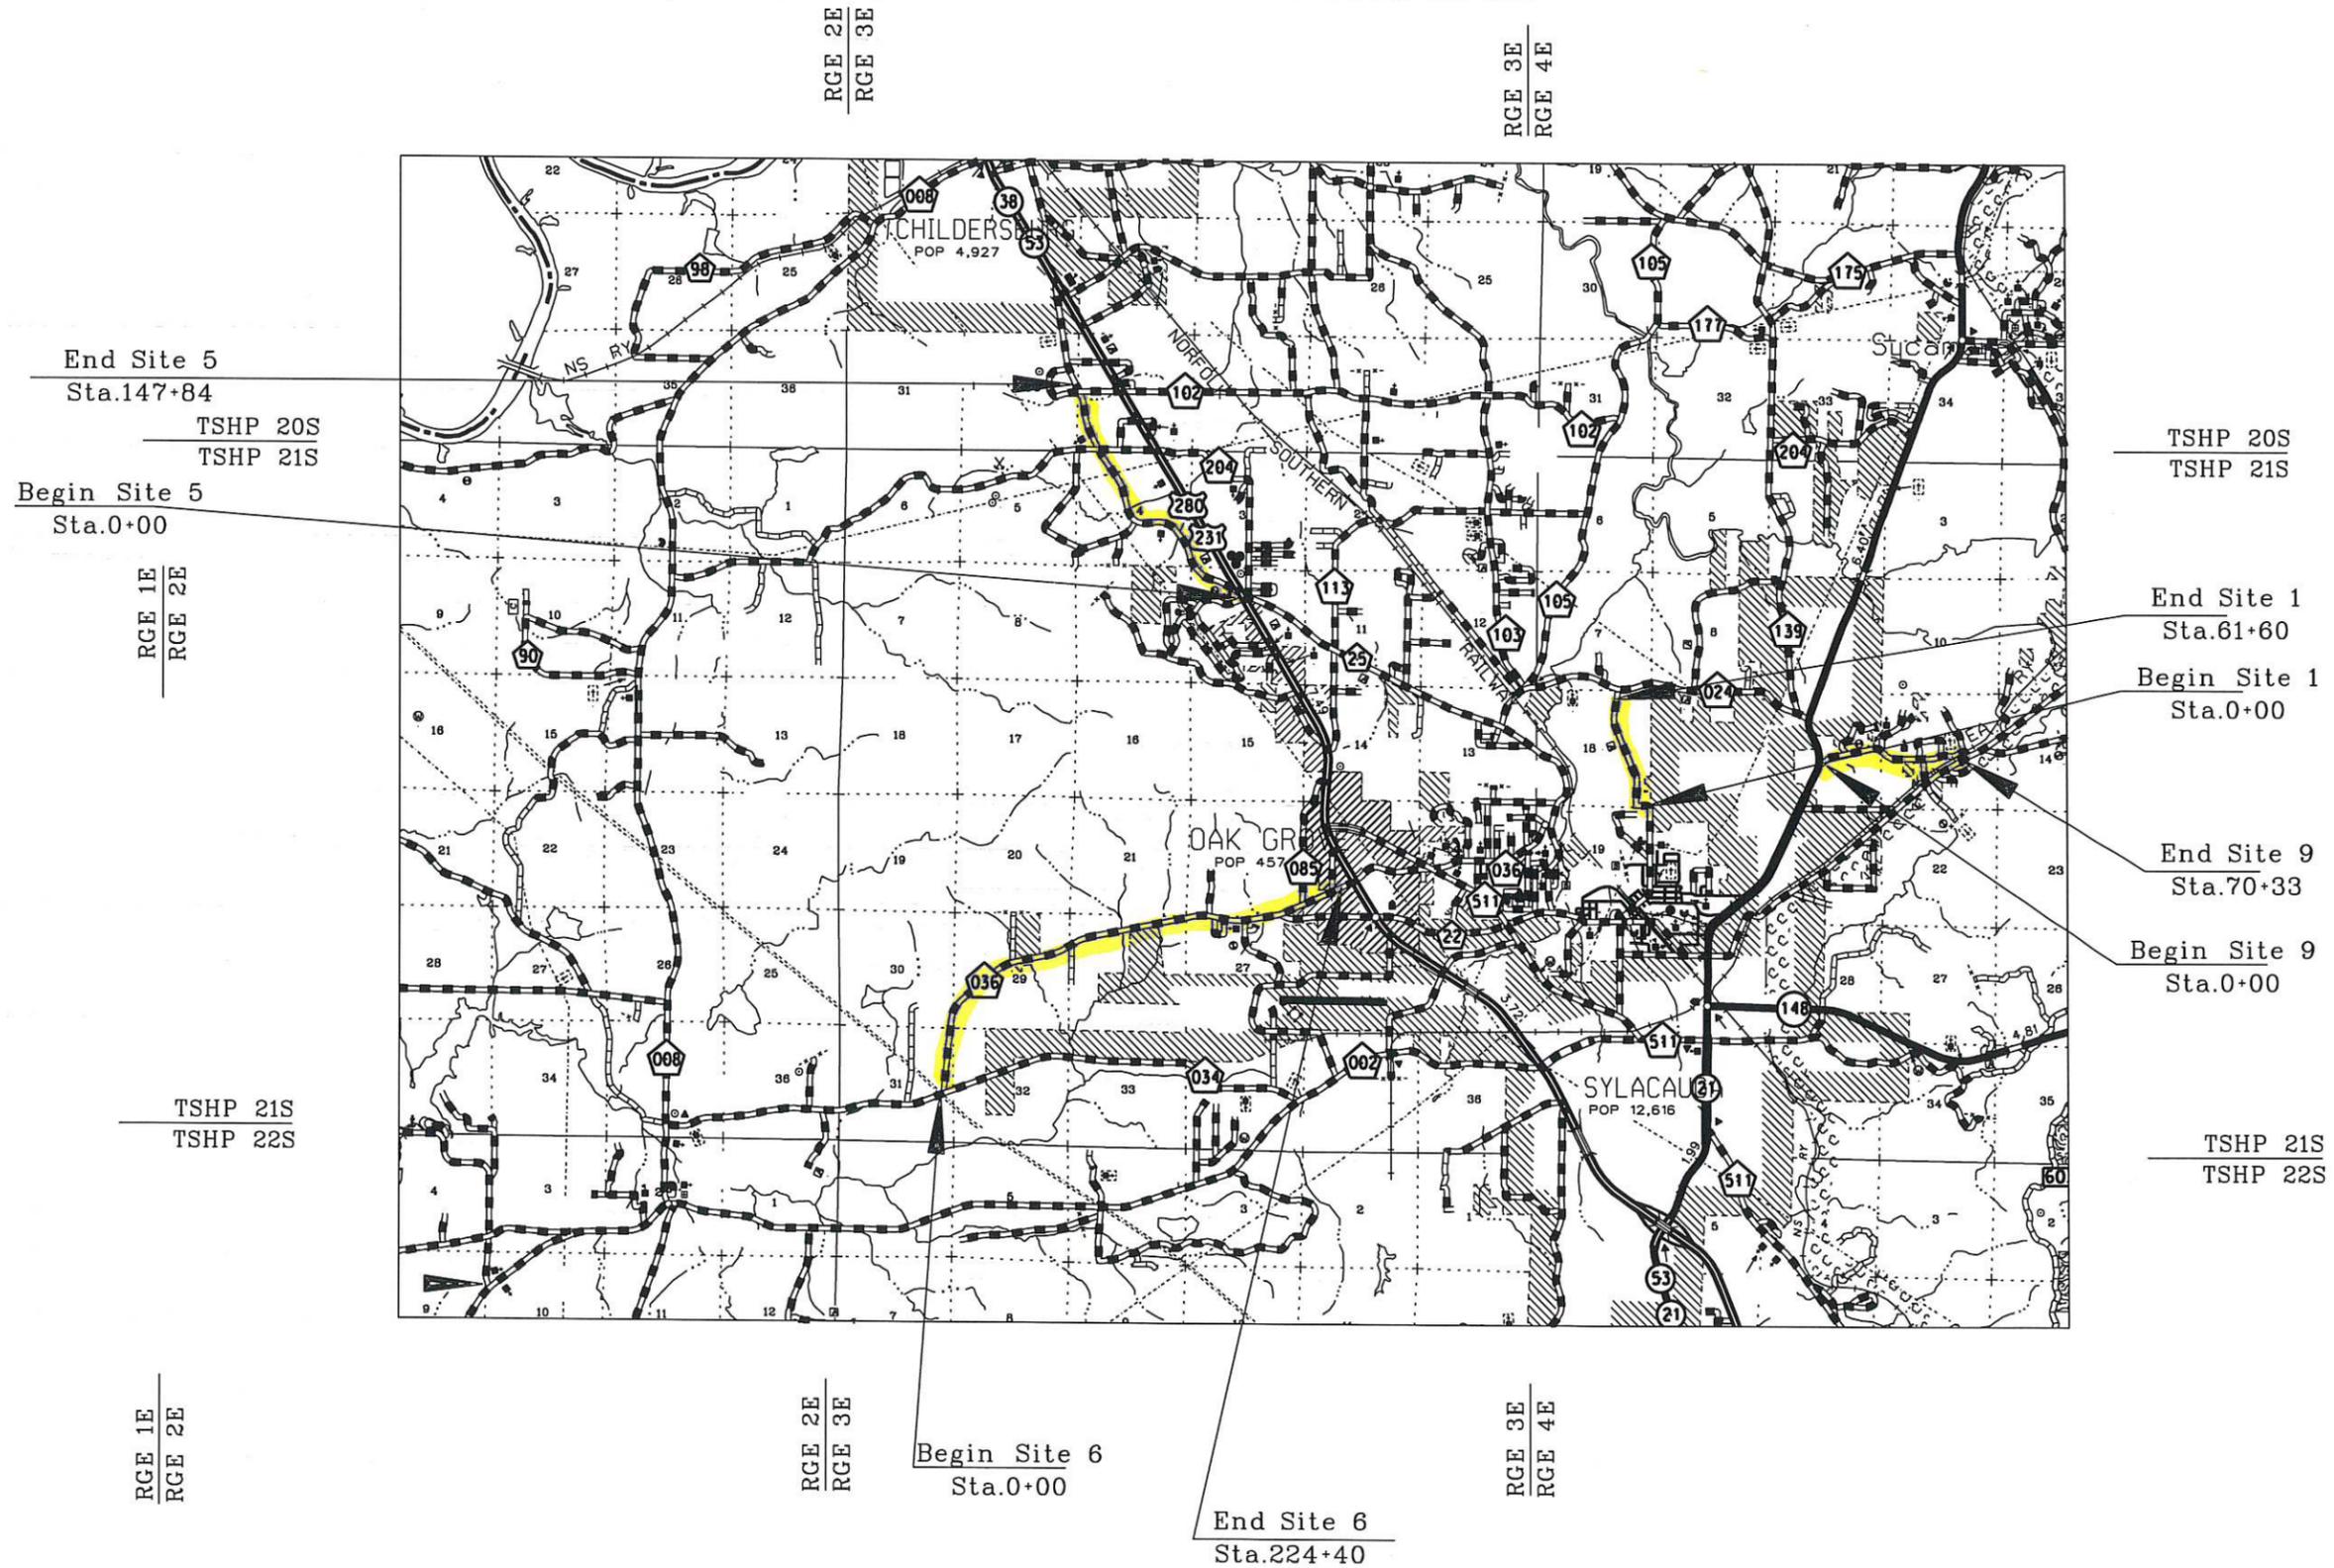

LOCATION MAP-SITES 2 & 7 PROJECT NO. TCP 61-01-26
TALLADEGA COUNTY

REFERENCE PROJECT NO	FISCAL YEAR	SHEET NO
TCP 61-01-26	2026	1D

Site 2: Jackson Trace Road Road (Talladega City Limits to Allen Road)
Site 7: Cedars Road (Cheaha Road to Munford High Football Field)



LOCATION MAP-SITES 3 PROJECT NO. TCP 61-01-26

TALLADEGA COUNTY

Site 3: Plantersville Road (Grist Mill Road to Renfro Tower Road)


Site 4: Berney Station Road (Whiting Road to AL77)

REFERENCE PROJECT NO	FISCAL YEAR	SHEET NO
TCP 61-01-26	2026	1E

RGE 3E
RGE 4E

RGE 4E
RGE 5E

RGE 5E
RGE 6E

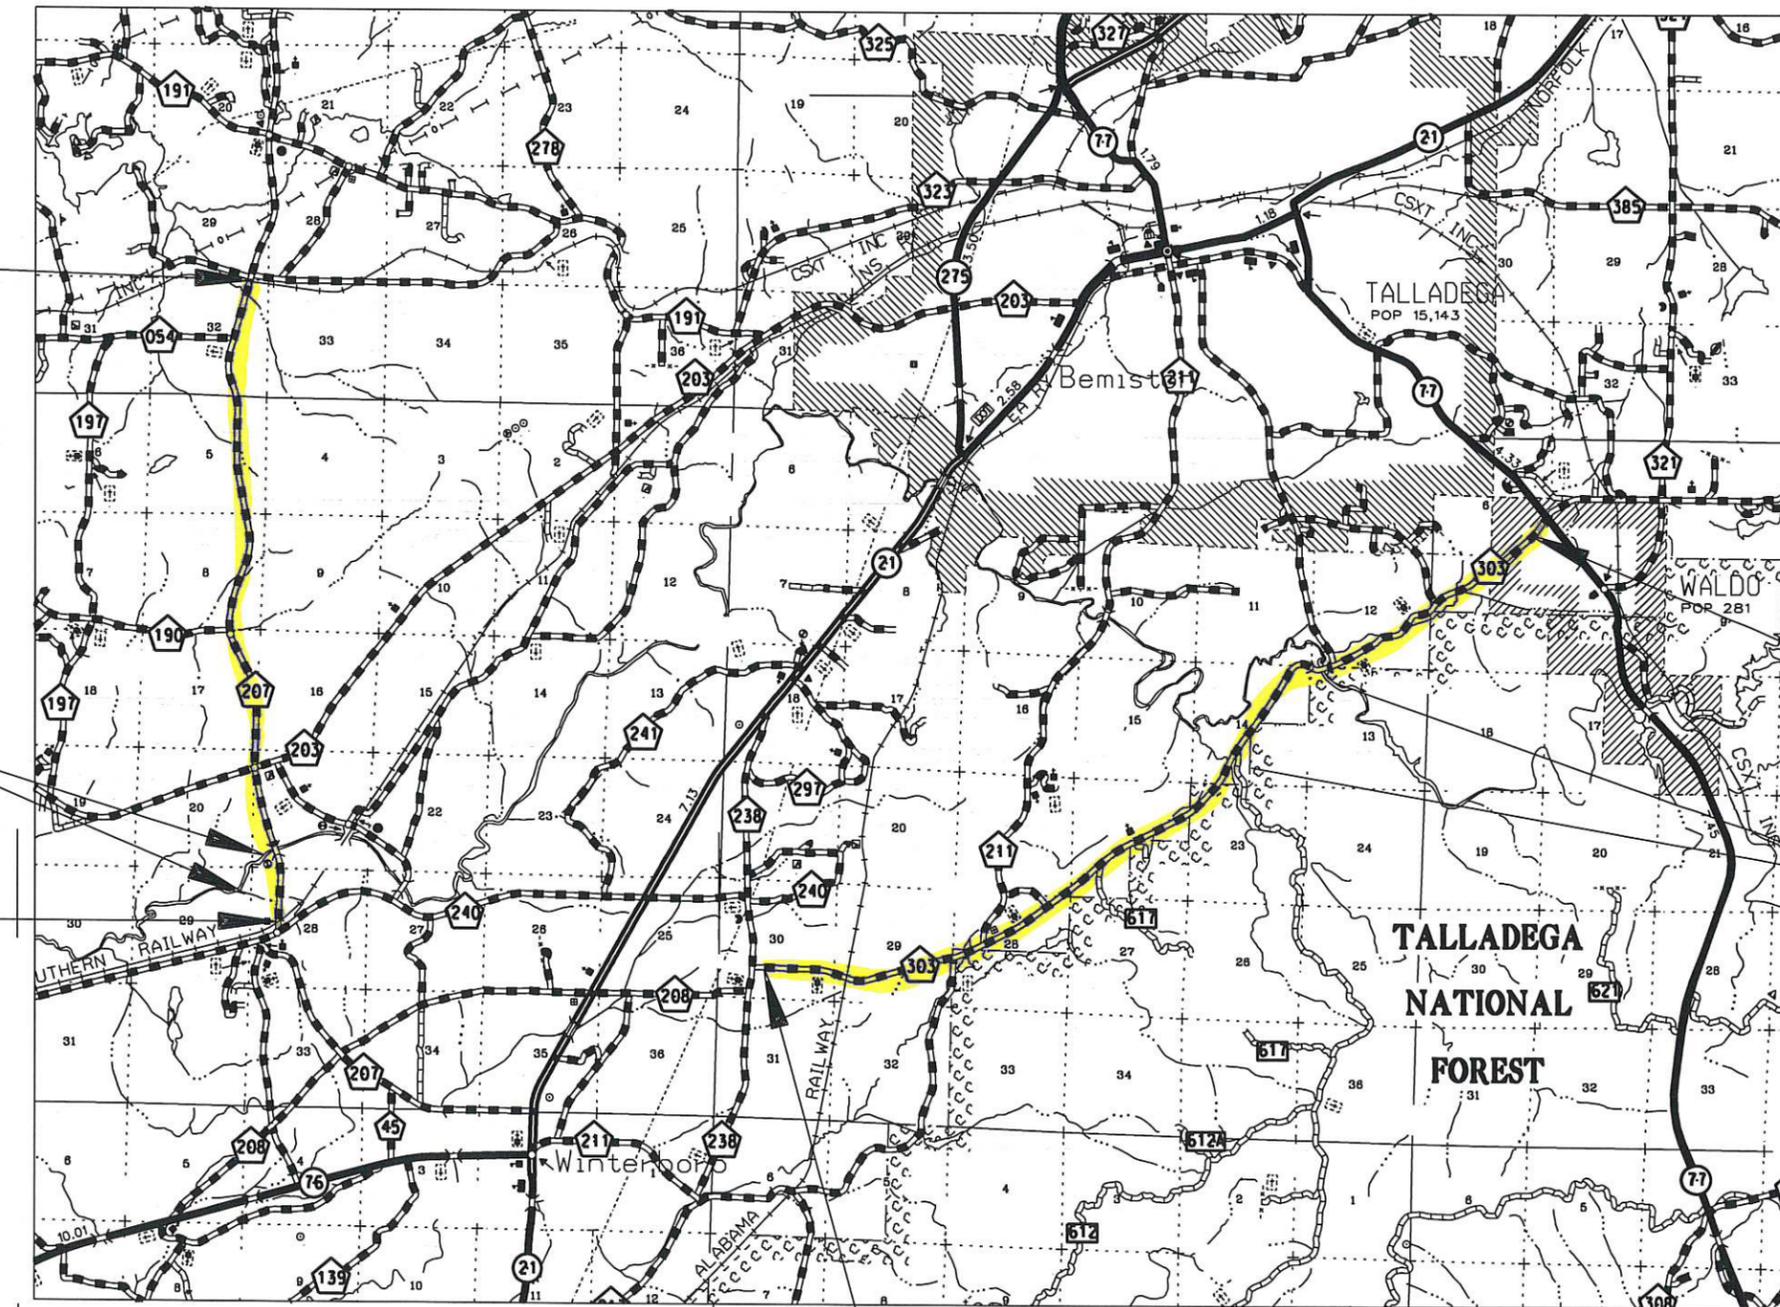

End Site 3

Sta.316+80

TSHP 18 S

TSHP 19 S

TSHP 18 S

TSHP 19 S

End Site 4

Sta.435+60

Begin Site 3

Sta.0+00

TSHP 19 S

TSHP 20 S

TSHP 19 S

TSHP 20 S



Begin Site 4

Sta.0+00

RGE 3E
RGE 4E

RGE 4E
RGE 5E


RGE 5E
RGE 6E



LOCATION MAP-SITES 8
 PROJECT NO. TCP 61-01-26
 TALLADEGA COUNTY


REFERENCE PROJECT NO	FISCAL YEAR	SHEET NO
TCP 61-01-26	2026	1F

Site 8: Twin Churches Road: (Ironaton Road to McElderry Road)

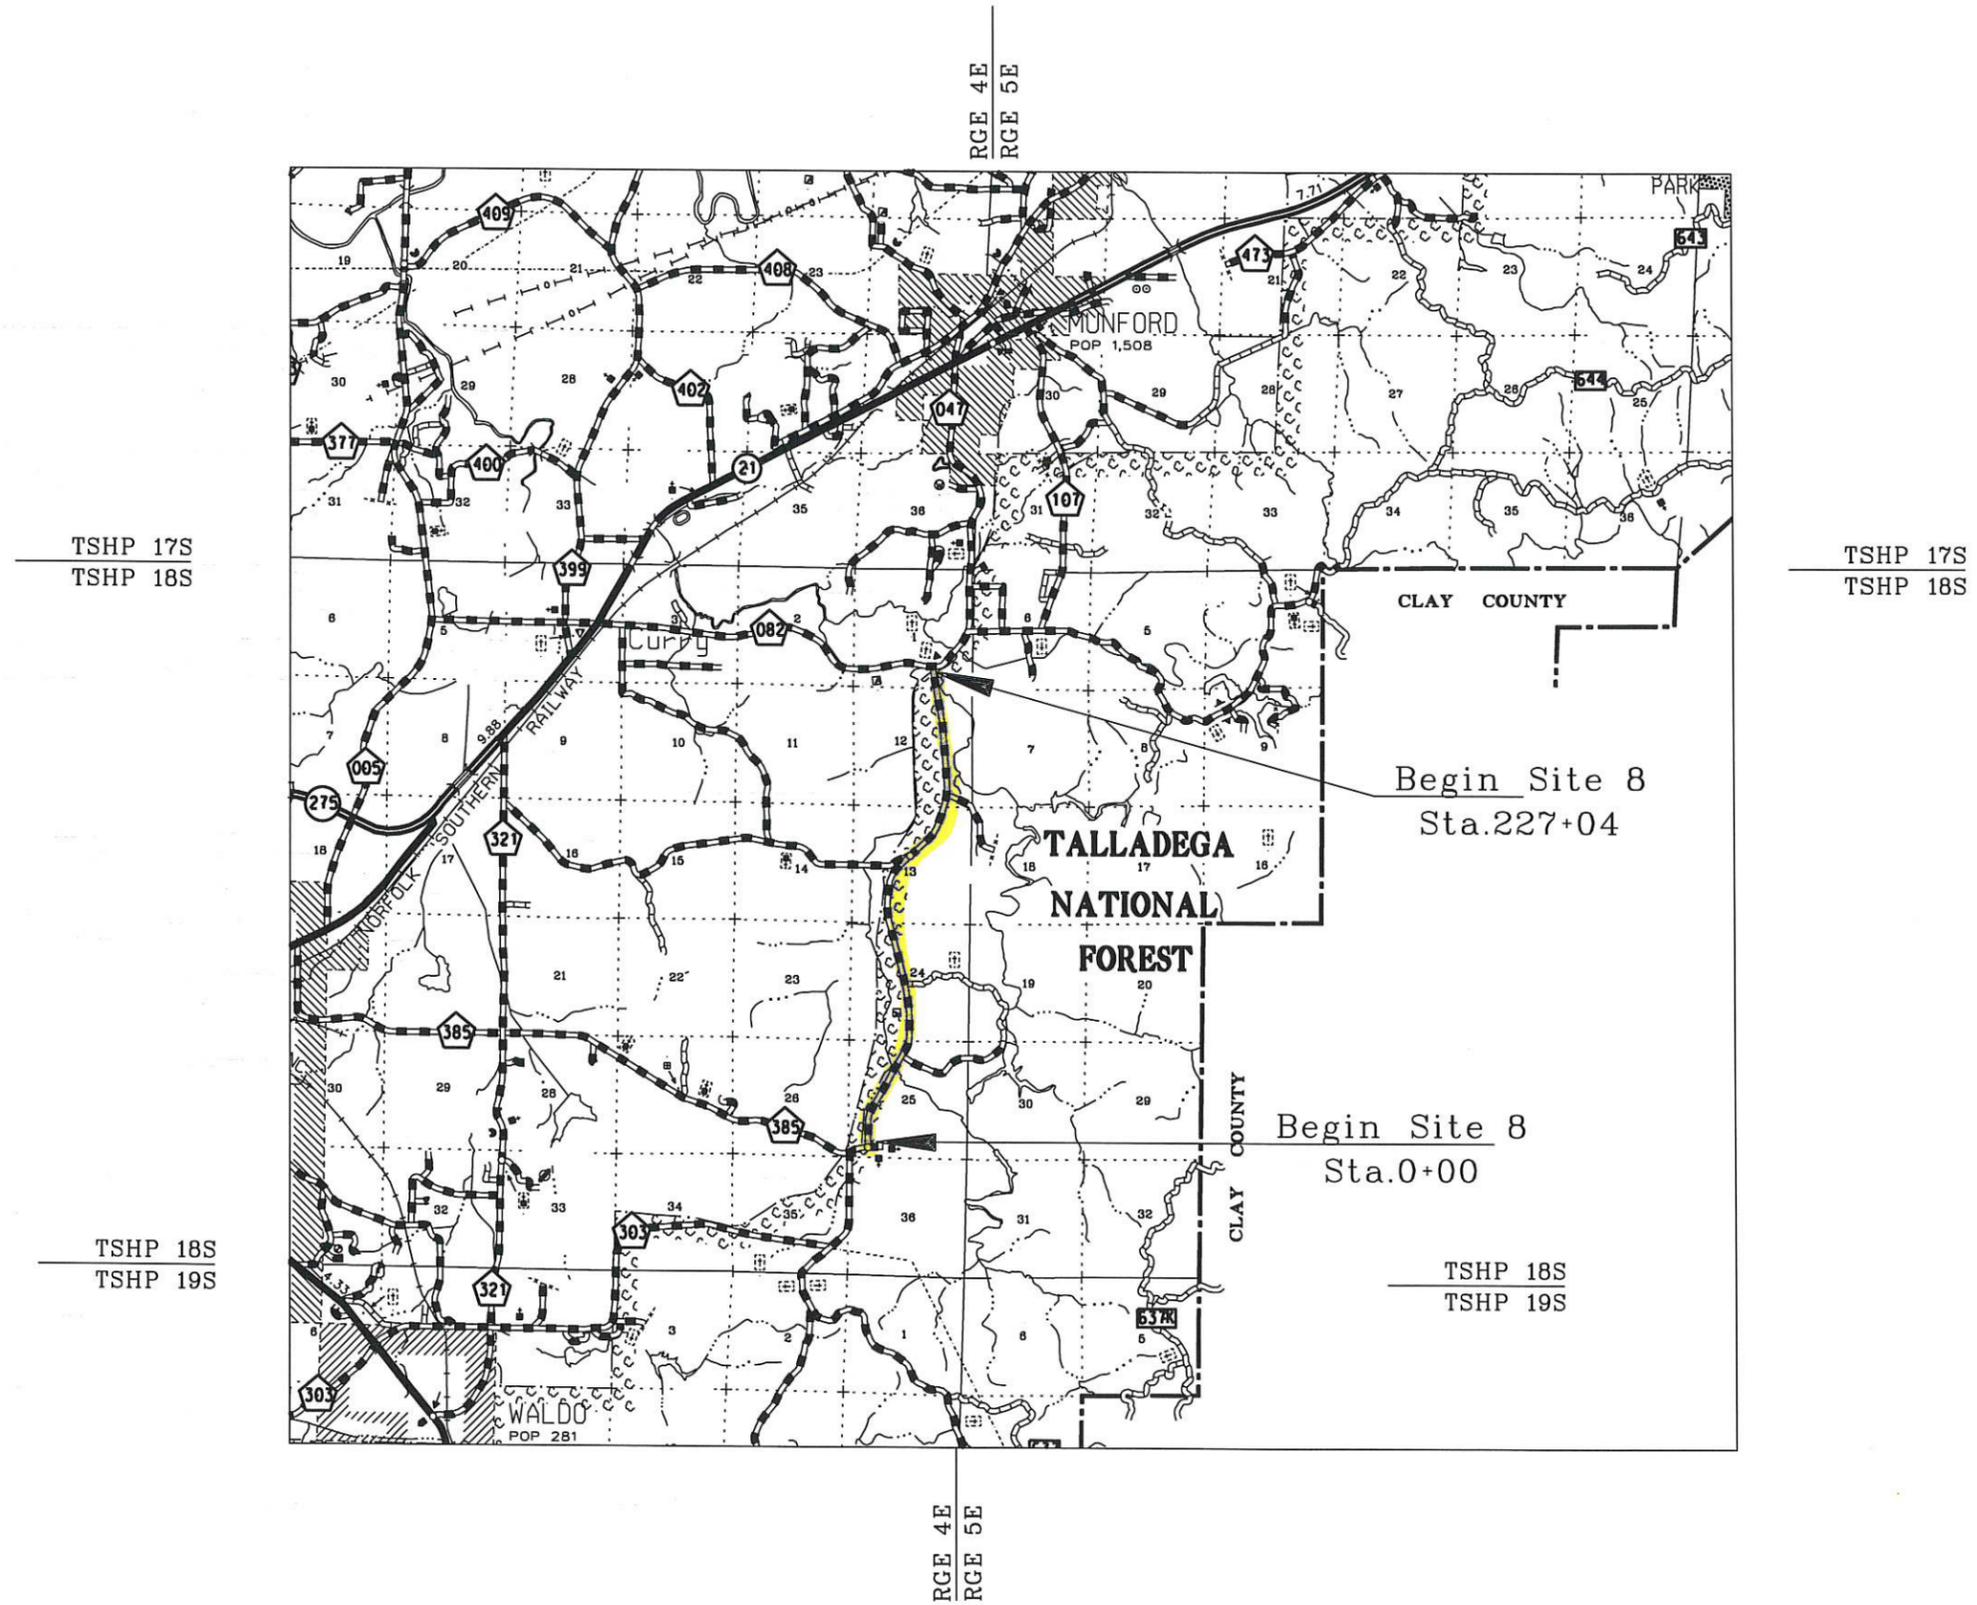

REFERENCE PROJECT NO	FISCAL YEAR	SHEET NO
TCP 61-01-26	2026	2

TYPICAL SECTION

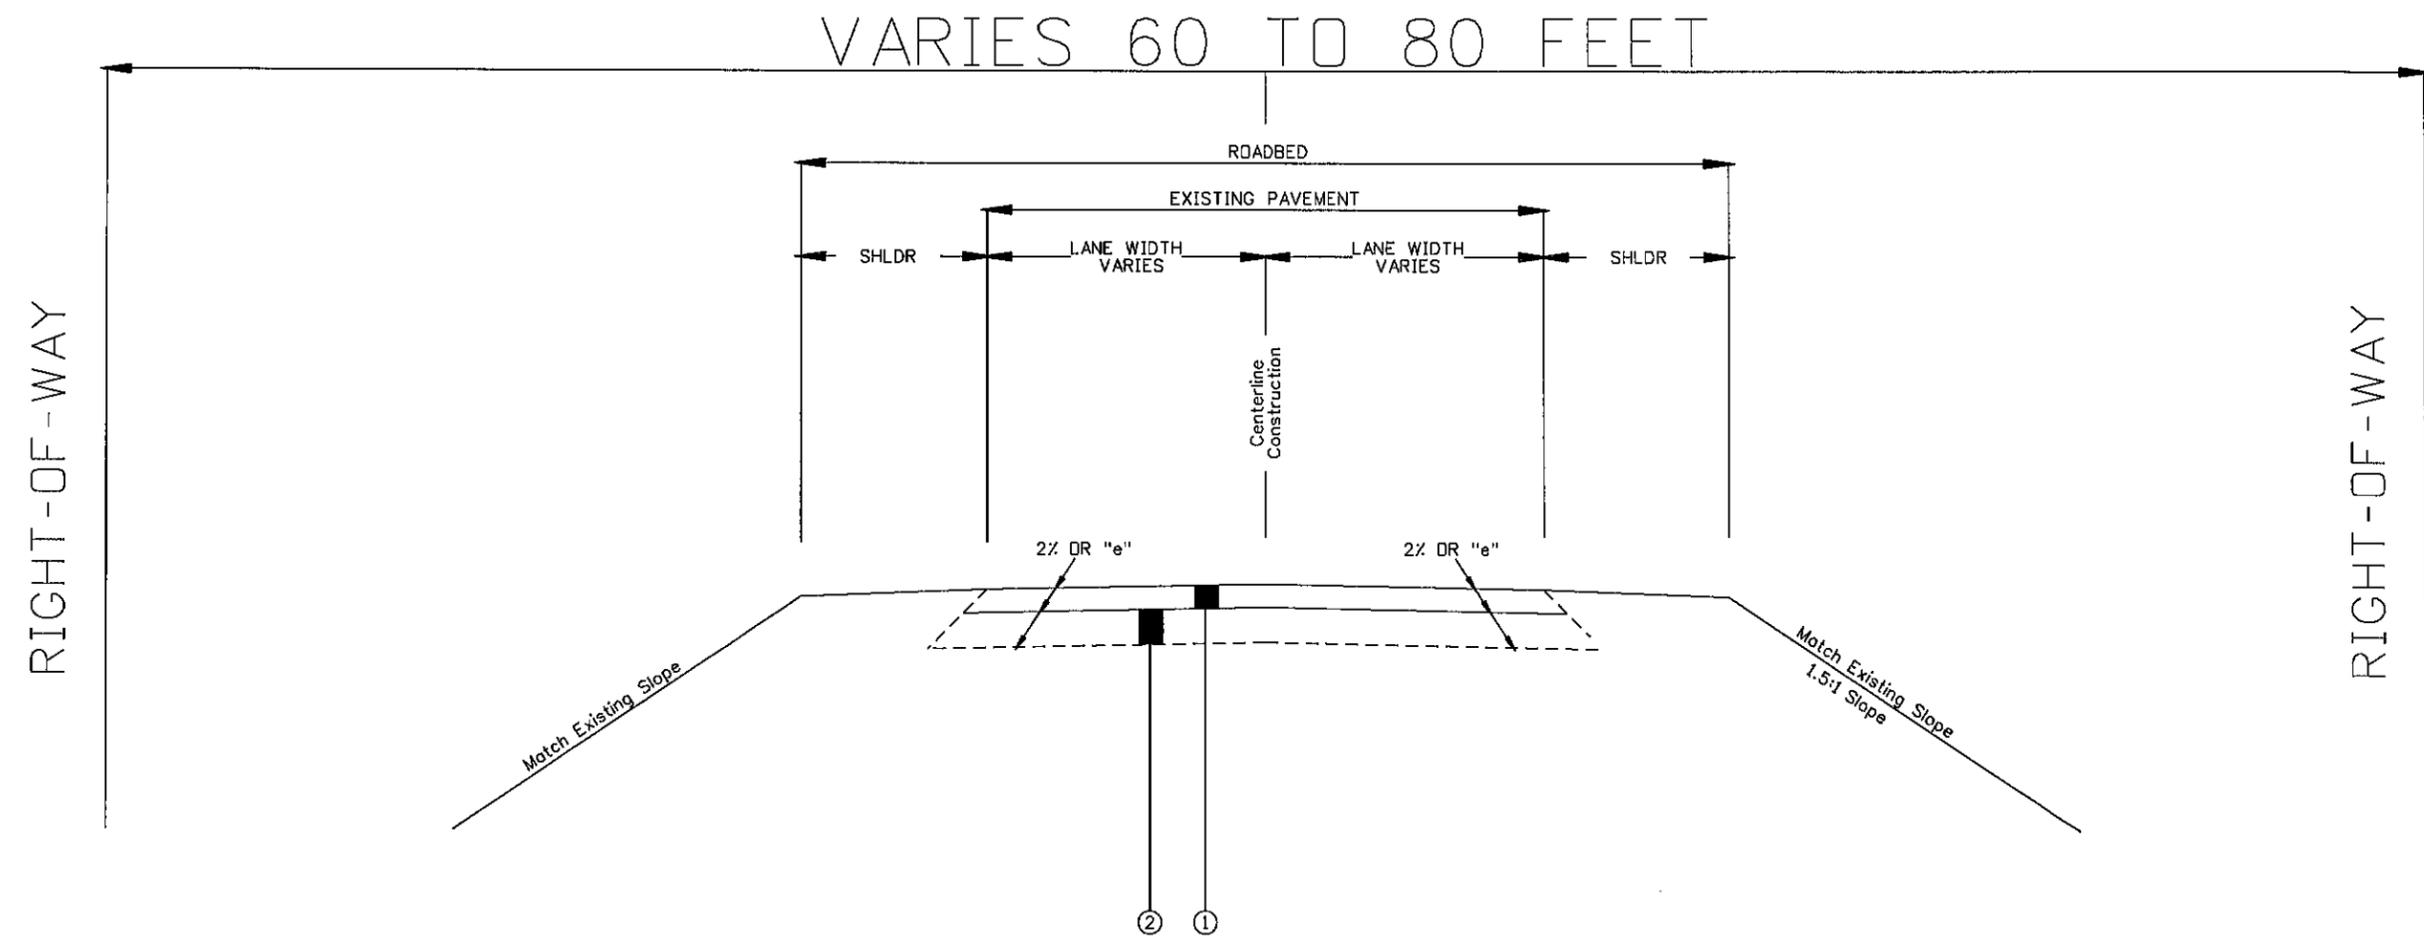

NOTE: PAVEMENT WIDTH TO MATCH EXISTING
SEE SHEET 3-F FOR PAVEMENT WIDTH

- ① ITEM NO. 403B-000 REQUIRED MICRO-SURFACING SEAL COAT, TYPE II (Approx. 30 POUNDS/SQYD)
- ② EXISTING PAVEMENT

REFERENCE PROJECT NO	FISCAL YEAR	SHEET NO
TCP 61-01-26	2026	2A

PROJECT NOTES

PROJECT NUMBER TCP 61-01-26

200	OMIT
300	Temporary Striping Does Not Include Edge Lines.
303	Signs W20-1 (Road Work Ahead) shall stay in place on all Sites until project is complete.
304	THE TRAFFIC CONTROL DEVICES FOR THIS PROJECT (CONSTRUCTION SIGNS, CONES AND BALLAST FOR CONES) REFLECT QUANTITIES FOR LANE CLOSURE FOR ONE SITE. THE UNIT BID PRICE FOR THESE ITEMS SHALL REFLECT THE COSTS FOR THE RELOCATION AND MAINTENANCE OF THESE DEVICES FOR THE OTHER WORK SITES WITHIN THIS PROJECT. THE CONTRACTOR SHALL ONLY BE PAID FOR THE MAXIMUM NUMBER OF TRAFFIC CONTROL ITEMS PROVIDED AT ANY ONE TIME. SEE STANDARD SPECIFICATIONS 740.05(a).
305	Item 403B-000 RATE MAY BE INCREASED AS DIRECTED BY THE PROJECT ENGINEER
306	Item 403B-000 INCREASED 373 TONS FOR INTERSECTIONS. SEE SHEET 3F FOR LOCATIONS.
800	THERE ARE NO KNOWN UTILITY CONFLICTS WITH THIS PROJECT.
900	NPDES PERMIT COVERAGE IS NOT REQUIRED FOR THIS PROJECT.

SHEET TITLE	ROUTE
PROJECT NOTES	

SUMMARY OF QUANTITIES

PROJECT NUMBER TCP 61-01-26

TOTAL	ITEM NO.	UNIT	DESCRIPTION	PROJECT NOTE
7367	403B-000	Ton	Micro-Surfacing Seal Coat, Type II	305,306
1	600A-000	LS	Mobilization	
77	701A-030	Mile	Solid White, Class 2T, Type A Traffic Stripe	
48	701A-034	Mile	Solid Yellow, Class 2T, Type A Traffic Stripe	
21	701A-044	Mile	Broken Yellow, Class 2T, Type A Traffic Stripe	
21	701C-000	Mile	Broken Temporary Traffic Stripe	300
48	701C-001	Mile	Solid Temporary Traffic Stripe	300
780	703A-004	SQFT	Traffic Control Markings, Class 2T, Type A	
547	703B-004	SQFT	Traffic Control Legends, Class 2T, Type A	
288	740B-000	SQFT	Construction Signs	303,304
50	740E-000	Each	Cones (36 Inches High)	304
50	740M-001	Each	Ballast For Cones	304
1	7400-000	Each	Pilot Car	

REFERENCE PROJECT NO	FISCAL YEAR	SHEET NO
TCP 61-01-26	2026	3A

SUMMARY OF QUANTITIES CONSTRUCTION SIGNS

PROJECT NUMBER TCP 61-01-26

SIGN	DESCRIPTION	SIZE-SQFT	QUANTITY	SQ.FT.	DRAWINGS
W20-1	ROAD WORK AHEAD (36"X36")	9.0	28	252.0	SHS-11
W20-4	ONE LANE ROAD AHEAD (36"X36")	9.0	2	18.0	SHS-11
W20-7	FLAGMAN	9.0	2	18.0	SHS-11
			TOTAL	288.0	

PROJECT NOTES: 303,304

SHEET TITLE	ROUTE
SUMMARY OF QUANTITIES CONSTRUCTION SIGNS	

SUMMARY OF QUANTITIES TRAFFIC STRIPE

PROJECT NUMBER TCP 61-01-26

LEGEND FOR CALCULATIONS
 TYPE 0 NO PASSING ZONE
 TYPE 1 UNIDIRECTIONAL PASSING ZONE
 TYPE 2 BIDIRECTIONAL PASSING ZONE

SITE 1 SPRING VALLEY ROAD

Spring Valley Road Site 1										
Sta.	To Sta.	Sta.	To Sta.	Length	Type	Item 701A-030 Solid White Class 2T Type A Traffic Stripe (FEET)	Item 701A-034 Solid Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701A-044 Broken Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701C-001 Solid Temporary Traffic Stripe (FEET)	Item 701C-000 Broken Temporary Traffic Stripe (FEET)
+0.00	55+44.00	0	5544	5544	0	11088	11088	0	11088	0
				5544		11088	11088	0	11088	0
TOTAL MILES						2.10	2.10	0.00	2.10	0.00

SITE 2 JACKSON TRACE ROAD

Jackson Trace-Site 2										
Sta.	To Sta.	Sta.	To Sta.	Length	Type	Item 701A-030 Solid White Class 2T Type A Traffic Stripe (FEET)	Item 701A-034 Solid Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701A-044 Broken Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701C-001 Solid Temporary Traffic Stripe (FEET)	Item 701C-000 Broken Temporary Traffic Stripe (FEET)
+0.00	23+70.00	0	2370	2370	0	4740	4740	0	4740	0
23+70.00	29+20.00	2370	2920	550	1	1100	550	550	550	550
29+20.00	36+30.00	2920	3630	710	1	1420	710	710	710	710
36+30.00	45+30.00	3630	4530	900	0	1800	1800	0	1800	0
45+30.00	52+20.00	4530	5220	690	1	1380	690	690	690	690
52+20.00	59+15.00	5220	5915	695	2	1390	0	695	0	695
59+15.00	65+80.00	5915	6580	665	1	1330	665	665	665	665
65+80.00	69+20.00	6580	6920	340	1	680	340	340	340	340
69+20.00	70+20.00	6920	7020	100	0	200	200	0	200	0
70+20.00	89+20.00	7020	8920	1900	2	3800	0	1900	0	1900
89+20.00	95+90.00	8920	9590	670	1	1340	670	670	670	670
95+90.00	111+42.00	9590	11142	1552	0	3104	3104	0	3104	0
111+42.00	117+70.00	11142	11770	628	1	1256	628	628	628	628
117+70.00	122+70.00	11770	12270	500	2	1000	0	500	0	500
122+70.00	130+00.00	12270	13000	730	1	1460	730	730	730	730
130+00.00	155+75.00	13000	15575	2575	0	5150	5150	0	5150	0
155+75.00	162+75.00	15575	16275	700	1	1400	700	700	700	700
162+75.00	166+30.00	16275	16630	355	1	710	355	355	355	355
166+30.00	181+50.00	16630	18150	1520	0	3040	3040	0	3040	0
181+50.00	186+60.00	18150	18660	510	1	1020	510	510	510	510
186+60.00	196+60.00	18660	19660	1000	2	2000	0	1000	0	1000
196+60.00	204+20.00	19660	20420	760	1	1520	760	760	760	760
204+20.00	221+70.00	20420	22170	1750	0	3500	3500	0	3500	0
221+70.00	230+20.00	22170	23020	850	1	1700	850	850	850	850
230+20.00	251+80.00	23020	25180	2160	2	4320	0	2160	0	2160
251+80.00	257+40.00	25180	25740	560	1	1120	560	560	560	560
257+40.00	259+60.00	25740	25960	220	0	440	440	0	440	0
259+60.00	263+20.00	25960	26320	360	1	720	360	360	360	360
263+20.00	272+00.00	26320	27200	880	2	1760	0	880	0	880
272+00.00	282+75.00	27200	28275	1075	1	2150	1075	1075	1075	1075
282+75.00	363+00.00	28275	36300	8025	0	16050	16050	0	16050	0
363+00.00	369+00.00	36300	36900	600	1	1200	600	600	600	600
369+00.00	391+00.00	36900	39100	2200	2	4400	0	2200	0	2200
391+00.00	402+00.00	39100	40200	1100	1	2200	1100	1100	1100	1100
402+00.00	410+90.00	40200	41090	890	0	1780	0	3560	0	3560
TOTAL FT						82180	49877	24748	49877	24748
TOTAL MILES						15.56	9.45	4.69	9.45	4.69

SITE 3 PLANTERSVILLE ROAD

Plantersville Road-Site 3										
Sta.	To Sta.	Sta.	To Sta.	Length	Type	Item 701A-030 Solid White Class 2T Type A Traffic Stripe (FEET)	Item 701A-034 Solid Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701A-044 Broken Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701C-001 Solid Temporary Traffic Stripe (FEET)	Item 701C-000 Broken Temporary Traffic Stripe (FEET)
+0.00	2+40.00	0	240	240	0	480	480	0	480	0
2+40.00	8+20.00	240	820	580	1	1160	580	580	580	580
8+20.00	15+50.00	820	1550	730	2	1460	0	730	0	730
15+50.00	22+50.00	1550	2250	700	1	1400	700	700	700	700
22+50.00	35+00.00	2250	3500	1250	0	2500	2500	0	2500	0
35+00.00	41+00.00	3500	4100	600	1	1200	600	600	600	600
41+00.00	48+40.00	4100	4840	740	1	1480	740	740	740	740
48+40.00	55+50.00	4840	5550	710	1	1420	710	710	710	710
55+50.00	62+40.00	5550	6240	690	2	1380	0	690	0	690
62+40.00	69+30.00	6240	6930	690	1	1380	690	690	690	690
69+30.00	72+80.00	6930	7280	350	0	700	700	0	700	0
72+80.00	80+50.00	7280	8050	770	1	1540	770	770	770	770
80+50.00	94+30.00	8050	9430	1380	2	2760	0	1380	0	1380
94+30.00	102+60.00	9430	10260	830	1	1660	830	830	830	830
102+60.00	110+00.00	10260	11000	740	0	1480	1480	0	1480	0
110+00.00	117+50.00	11000	11750	750	1	1500	750	750	750	750
117+50.00	123+00.00	11750	12300	550	2	1100	0	550	0	550
123+00.00	131+00.00	12300	13100	800	1	1600	800	800	800	800
131+00.00	138+50.00	13100	13850	750	0	1500	1500	0	1500	0
138+50.00	141+50.00	13850	14150	300	1	600	300	300	300	300
141+50.00	146+50.00	14150	14650	500	2	1000	0	500	0	500
146+50.00	150+00.00	14650	15000	350	1	700	350	350	350	350
150+00.00	187+50.00	15000	18750	3750	0	7500	7500	0	7500	0
187+50.00	193+00.00	18750	19300	550	1	1100	550	550	550	550
193+00.00	232+00.00	19300	23200	3900	2	7800	0	3900	0	3900
232+00.00	240+00.00	23200	24000	800	1	1600	800	800	800	800
240+00.00	298+75.00	24000	29875	5875	0	11750	11750	0	11750	0
TOTAL FT					29875	59750	35080	16920	35080	16920
TOTAL MILES						11.32	6.64	3.20	6.64	3.20

SUMMARY OF QUANTITIES TRAFFIC STRIPE

PROJECT NUMBER TCP 61-01-26

LEGEND FOR CALCULATIONS
 TYPE 0 NO PASSING ZONE
 TYPE 1 UNIDIRECTIONAL PASSING ZONE
 TYPE 2 BIDIRECTIONAL PASSING ZONE

SITE 4 BERNEY STATION ROAD

Berney Station Road Site 4										
Sta.	To Sta.	Sta.	To Sta.	Length	Type	Item 701A-030 Solid White Class 2T Type A Traffic Stripe (FEET)	Item 701A-034 Solid Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701A-044 Broken Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701C-001 Solid Temporary Traffic Stripe (FEET)	Item 701C-000 Broken Temporary Traffic Stripe (FEET)
+0.00	1+98.00	0	198	198	0	396	396	0	396	0
1+98.00	9+02.00	198	902	704	1	1408	704	704	704	704
9+02.00	9+34.00	902	934	32	0	64	64	0	64	0
9+34.00	16+35.00	934	1635	701	1	1402	701	701	701	701
16+35.00	20+73.00	1635	2073	438	0	876	876	0	876	0
20+73.00	33+73.00	2073	3373	1300	1	2600	1300	1300	1300	1300
33+73.00	54+86.00	3373	5486	2113	0	4226	4226	0	4226	0
54+86.00	61+43.00	5486	6143	657	1	1314	657	657	657	657
61+43.00	86+02.00	6143	8602	2459	2	4918	0	2459	0	2459
86+02.00	92+96.00	8602	9296	694	1	1388	694	694	694	694
92+96.00	95+18.00	9296	9518	222	0	444	444	0	444	0
95+18.00	102+39.00	9518	10239	721	1	1442	721	721	721	721
102+39.00	111+53.00	10239	11153	914	2	1828	0	914	0	914
111+53.00	118+33.00	11153	11833	680	1	1360	680	680	680	680
118+33.00	122+61.00	11833	12261	428	0	856	856	0	856	0
122+61.00	129+39.00	12261	12939	678	1	1356	678	678	678	678
129+39.00	154+42.00	12939	15442	2503	2	5006	0	2503	0	2503
154+42.00	168+27.00	15442	16827	1385	1	2770	1385	1385	1385	1385
168+27.00	175+49.00	16827	17549	722	2	1444	0	722	0	722
175+49.00	189+21.00	17549	18921	1372	1	2744	1372	1372	1372	1372
189+21.00	212+24.00	18921	21224	2303	2	4606	0	2303	0	2303
212+24.00	219+04.00	21224	21904	680	1	1360	680	680	680	680
219+04.00	222+80.00	21904	22280	376	0	752	752	0	752	0
222+80.00	229+57.00	22280	22957	677	1	1354	677	677	677	677
229+57.00	231+57.00	22957	23157	200	2	400	0	200	0	200
231+57.00	238+35.00	23157	23835	678	1	1356	678	678	678	678
238+35.00	253+86.00	23835	25386	1551	0	3102	3102	0	3102	0
253+86.00	260+24.00	25386	26024	638	1	1276	638	638	638	638
260+24.00	277+69.00	26024	27769	1745	2	3490	0	1745	0	1745
277+69.00	282+44.00	27769	28244	475	1	950	475	475	475	475
282+44.00	410+59.00	28244	41059	12815	0	25630	25630	0	25630	0
410+59.00	416+95.00	41059	41695	636	1	1272	636	636	636	636
416+95.00	422+81.00	41695	42281	586	2	1172	0	586	0	586
422+81.00	429+92.00	42281	42992	711	1	1422	711	711	711	711
429+92.00	441+96.00	42992	44196	1204	0	2408	2408	0	2408	0
				44196		88392	52141	24819	52141	24819
				TOTAL MILES		16.74	9.88	4.70	9.88	4.70

SITE 5 OLD SYLACAUGA HIGHWAY

Old Sylacauga Highway Site 5										
Sta.	To Sta.	Sta.	To Sta.	Length	Type	Item 701A-030 Solid White Class 2T Type A Traffic Stripe (FEET)	Item 701A-034 Solid Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701A-044 Broken Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701C-001 Solid Temporary Traffic Stripe (FEET)	Item 701C-000 Broken Temporary Traffic Stripe (FEET)
+0.00	149+00.00	0	14900	14900	0	29800	29800	0	29800	0
						29800	29800	0	29800	0
				TOTAL MILES		5.64	5.64	0.00	5.64	0.00

SITE 6 ODENS MILL ROAD

Odens Mill Road Site 6										
Sta.	To Sta.	Sta.	To Sta.	Length	Type	Item 701A-030 Solid White Class 2T Type A Traffic Stripe (FEET)	Item 701A-034 Solid Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701A-044 Broken Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701C-001 Solid Temporary Traffic Stripe (FEET)	Item 701C-000 Broken Temporary Traffic Stripe (FEET)
+0.00	6+00.00	0	600	600	0	1200	1200	0	1200	0
6+00.00	12+00.00	600	1200	600	1	1200	600	600	600	600
12+00.00	26+00.00	1200	2600	1400	2	2800	0	1400	0	1400
26+00.00	34+80.00	2600	3480	880	1	1760	880	880	880	880
34+80.00	41+00.00	3480	4100	620	0	1240	1240	0	1240	0
41+00.00	48+00.00	4100	4800	700	1	1400	700	700	700	700
48+00.00	56+00.00	4800	5600	800	1	1600	800	800	800	800
56+00.00	74+00.00	5600	7400	1800	0	3600	3600	0	3600	0
74+00.00	80+00.00	7400	8000	600	1	1200	600	600	600	600
80+00.00	88+50.00	8000	8850	850	1	1700	850	850	850	850
88+50.00	114+00.00	8850	11400	2550	0	5100	5100	0	5100	0
114+00.00	122+00.00	11400	12200	800	1	1600	800	800	800	800
122+00.00	143+00.00	12200	14300	2100	2	4200	0	2100	0	2100
143+00.00	153+00.00	14300	15300	1000	1	2000	1000	1000	1000	1000
153+00.00	182+00.00	15300	18200	2900	0	5800	5800	0	5800	0
182+00.00	187+00.00	18200	18700	500	1	1000	500	500	500	500
187+00.00	190+00.00	18700	19000	300	2	600	0	300	0	300
190+00.00	196+00.00	19000	19600	600	1	1200	600	600	600	600
196+00.00	201+00.00	19600	20100	500	0	1000	1000	0	1000	0
201+00.00	206+00.00	20100	20600	500	1	1000	500	500	500	500
206+00.00	218+00.00	20600	21800	1200	2	2400	0	1200	0	1200
218+00.00	224+50.00	21800	22450	650	1	1300	650	650	650	650
224+50.00	234+75.00	22450	23475	1025	0	2050	2050	0	2050	0
				23475		46950	28470	13480	28470	13480
				TOTAL MILES		8.89	5.39	2.55	5.39	2.55

SUMMARY OF QUANTITIES TRAFFIC STRIPE

PROJECT NUMBER TCP 61-01-26

LEGEND FOR CALCULATIONS
 TYPE 0 NO PASSING ZONE
 TYPE 1 UNIDIRECTIONAL PASSING ZONE
 TYPE 2 BIDIRECTIONAL PASSING ZONE

SITE 7 CEDARS ROAD

Cedars Road - Site 7 2025										
Sta.	To Sta.	Sta.	To Sta.	Length	Type	Item 701A-030 Solid White Class 2T Type A Traffic Stripe (FEET)	Item 701A-034 Solid Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701A-044 Broken Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701C-001 Solid Temporary Traffic Stripe (FEET)	Item 701C-000 Broken Temporary Traffic Stripe (FEET)
+0.00	+50.00	0	50	50	0	100	100	0	100	0
+50.00	7+10.00	50	710	660	1	1320	660	660	660	660
7+10.00	13+00.00	710	1300	590	2	1180	0	590	0	590
13+00.00	20+10.00	1300	2010	710	1	1420	710	710	710	710
20+10.00	29+50.00	2010	2950	940	0	1880	1880	0	1880	0
29+50.00	37+50.00	2950	3750	800	1	1600	800	800	800	800
37+50.00	43+00.00	3750	4300	550	1	1100	550	550	550	550
43+00.00	47+00.00	4300	4700	400	2	800	0	400	0	400
47+00.00	52+00.00	4700	5200	500	1	1000	500	500	500	500
52+00.00	60+50.00	5200	6050	850	2	1700	0	850	0	850
60+50.00	68+50.00	6050	6850	800	1	1600	800	800	800	800
68+50.00	83+50.00	6850	8350	1500	0	3000	3000	0	3000	0
83+50.00	89+80.00	8350	8980	630	1	1260	630	630	630	630
89+80.00	90+50.00	8980	9050	70	0	140	140	0	140	0
90+50.00	98+50.00	9050	9850	800	1	1600	800	800	800	800
98+50.00	103+00.00	9850	10300	450	0	900	900	0	900	0
103+00.00	114+00.00	10300	11400	1100	1	2200	1100	1100	1100	1100
114+00.00	116+00.00	11400	11600	200	2	400	0	200	0	200
116+00.00	121+20.00	11600	12120	520	1	1040	520	520	520	520
				12120	TOTAL FT	24240	13090	9110	13090	9110
					TOTAL MILES	4.59	2.48	1.73	2.48	1.73

SITE 9 HARPER SPRINGS ROAD

Harper Springs Road Site 9										
Sta.	To Sta.	Sta.	To Sta.	Length	Type	Item 701A-030 Solid White Class 2T Type A Traffic Stripe (FEET)	Item 701A-034 Solid Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701A-044 Broken Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701C-001 Solid Temporary Traffic Stripe (FEET)	Item 701C-000 Broken Temporary Traffic Stripe (FEET)
+0.00	15+00.00	0	1500	1500	0	3000	3000	0	3000	0
15+00.00	21+00.00	1500	2100	600	1	1200	600	600	600	600
21+00.00	27+00.00	2100	2700	600	1	1200	600	600	600	600
27+00.00	69+60.00	2700	6960	4260	0	8520	8520	0	8520	0
				6960	TOTAL FT	13920	12720	1200	12720	1200
					TOTAL MILES	2.64	2.41	0.23	2.41	0.23

SUMMARY OF QUANTITIES TRAFFIC STRIPE

PROJECT NUMBER TCP 61-01-26

LEGEND FOR CALCULATIONS
 TYPE 0 NO PASSING ZONE
 TYPE 1 UNIDIRECTIONAL PASSING ZONE
 TYPE 2 BIDIRECTIONAL PASSING ZONE

SITE 8 TWIN CHURCHES ROAD

TRAFFIC STRIPE SUMMARY FOR ALL SITES

Twin Churches Site 8										
Sta.	To Sta.	Sta.	To Sta.	Length	Type	Item 701A-030 Solid White Class 2T Type A Traffic Stripe (FEET)	Item 701A-034 Solid Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701A-044 Broken Yellow Class 2T Type A Traffic Stripe (FEET)	Item 701C-001 Solid Temporary Traffic Stripe (FEET)	Item 701C-000 Broken Temporary Traffic Stripe (FEET)
+0.00	+80.00	0	80	80	0	160	160	0	160	0
+80.00	6+10.00	80	610	530	1	1060	530	530	530	530
6+10.00	8+00.00	610	800	190	0	380	380	0	380	0
8+00.00	15+50.00	800	1550	750	1	1500	750	750	750	750
15+50.00	28+00.00	1550	2800	1250	1	2500	1250	1250	1250	1250
28+00.00	32+50.00	2800	3250	450	2	900	0	450	0	450
32+50.00	38+00.00	3250	3800	550	1	1100	550	550	550	550
38+00.00	40+50.00	3800	4050	250	2	500	0	250	0	250
40+50.00	48+50.00	4050	4850	800	1	1600	800	800	800	800
48+50.00	63+00.00	4850	6300	1450	0	2900	2900	0	2900	0
63+00.00	71+00.00	6300	7100	800	1	1600	800	800	800	800
71+00.00	97+00.00	7100	9700	2600	2	5200	0	2600	0	2600
97+00.00	105+00.00	9700	10500	800	1	1600	800	800	800	800
105+00.00	131+00.00	10500	13100	2600	0	5200	5200	0	5200	0
131+00.00	138+50.00	13100	13850	750	1	1500	750	750	750	750
138+50.00	145+60.00	13850	14560	710	2	1420	0	710	0	710
145+60.00	153+60.00	14560	15360	800	1	1600	800	800	800	800
153+60.00	157+00.00	15360	15700	340	0	680	680	0	680	0
157+00.00	163+50.00	15700	16350	650	1	1300	650	650	650	650
163+50.00	165+00.00	16350	16500	150	0	300	300	0	300	0
165+00.00	170+00.00	16500	17000	500	1	1000	500	500	500	500
170+00.00	175+00.00	17000	17500	500	0	1000	1000	0	1000	0
175+00.00	183+50.00	17500	18350	850	1	1700	850	850	850	850
183+50.00	223+00.00	18350	22300	3950	2	7900	0	3950	0	3950
223+00.00	230+40.00	22300	23040	740	1	1480	740	740	740	740
230+40.00	231+40.00	23040	23140	100	0	200	200	0	200	0
				23140	Total Ft	46280	20590	17730	20590	17730
				TOTAL MILES		8.77	3.90	3.36	3.90	3.36

SITE	701A-030 SOLID WHITE MILES	701A-034 SOLID YELLOW MILES	701A-044 BROKEN YELLOW MILES	701C-000 BROKEN YELLOW TEMP MILES	701C-001 SOLID YELLOW TEMP MILES
1	2.10	2.10	0.00	0.00	2.10
2	15.56	9.45	4.69	4.69	9.45
3	11.32	6.64	3.20	3.20	6.64
4	16.74	9.88	4.70	4.70	9.88
5	5.64	5.64	0.00	0.00	5.64
6	8.89	5.39	2.55	2.55	5.39
7	4.59	2.48	1.73	1.73	2.48
8	8.77	3.90	3.36	3.36	3.90
9	2.64	2.41	0.23	0.23	2.41
TOTAL	76.25	47.89	20.46	20.46	47.89
MILES	77	48	21	21	48

SUMMARY OF QUANTITIES MICRO, MISC.

PROJECT NUMBER TCP 61-01-26

SITE	LENGTH	LESS	PROJECT LENGTH	Width	SQYDS	ITEM 403B-000 RATE #/SQYD	ITEM 403B-000 (TONS)
1	6160	0	6160	18	12320	30	185
2	41185	510	40675	21	92649	30	1390
3	30000	971	29029	22	70960	30	1064
4	44428	500	43928	22	107380	30	1611
5	14900	0	14900	21	33939	30	509
6	23475	0	23475	20	52167	30	783
7	12200	0	12200	20	27111	30	407
8	23150	0	23150	22	55303	30	830
9	7033	0	7033	19	14457	30	217
				SUBTOTAL	466284		6994
						INTERSECTIONS	373
						TOTAL	7367

SITE	ROAD	RAILROAD LEGENDS NUMBER	703B-004 SQFT	MARKINGS FOR RR SQFT	MARKINGS INTERSECTIONS QUANTITY	INTERSECTION MARKINGS SQFT	703B-004 SQFT
1	SPRING VALLEY	0	0	0	1	30	30
2	JACKSON TRACE	0	0	0	2	60	60
3	PLANTERSVILLE	4	273.36	240	1	30	270
4	BERNEY STATION	2	136.68	120	1	30	150
5	OLD SYLACAUGA HWY	0	0	0	0	0	0
6	ODENS MILL	0	0	0	1	30	30
7	CEDARS	0	0	0	1	30	30
8	TWIN CHURCHES	0	0	0	2	60	60
9	HARPER SPRINGS	2	136.68	120	1	30	150
			TOTAL SQFT	480		300	780

ITEM403B-000 INTERSECTING ROADS								
SITE	ROAD	LOCATION	A	B	C	AREA	RATE	TONS
1	SPRING VALLEY	NORTH	91	40	27	1768.50	40.00	35.37
2	JACKSON TRACE	NORTH	100	50	45	3375.00	40.00	67.50
3	PLANTERSVILLE	SOUTH	90	35	40	2500.00	40.00	50.00
4	BERNEY STATION	WEST	80	35	35	2012.50	40.00	40.25
5	OLD SYLACAUGA HWY	NONE	0	0	0	0.00	40.00	0.00
6	ODENS MILL	SOUTH	85	24	42	2289.00	40.00	45.78
7	CEDARS	SOUTH	91	26	30	1755.00	40.00	35.10
7	TWIN CHURCHES	NORTH	115	30	40	2900.00	40.00	58.00
8	TWIN CHURCHES	SOUTH	60	24	24	1008.00	40.00	20.16
9	HARPER SPRINGS	EAST	50	20	30	1050.00	40.00	21.00
							TOTAL	373

TRAFFIC CONTROL SUMMARY

PROJECT NUMBER TCP 61-01-26

REQUIRED TRAFFIC CONTROL SUMMARY						
CONSTRUCTION SIGNS 740B-000						
	SIGN	SIZE INCHES	SHS DWG. NO.	NO.	SQUARE FEET	REMARKS
W20-1	ROAD WORK AHEAD	36 X 36	SHS-11	28	252.00	SEE PROJECT NOTE 303 304
W20-4	ONE LANE ROAD AHEAD	36 X 36	SHS-11	2	18.00	
W20-7	FLAGMAN	36 X 36	SHS-11	2	18.00	
	TOTAL				288.00	

T.C.P. NOTES

SEE SHEETS 8 & 9

PROJECT NOTE 303 & 304


NOTE: SIGNS REBUILD ALABAMA (RA-1), G20-1 AND G20-2 ARE NOT APPLICABLE.

W20-1 ROAD WORK AHEAD INCREASED TO PLACE ON ADJOINING ROADS TO REMAIN IN PLACE.


ADDITIONAL ROAD WORK SIGNS SET UP FOR VARIOUS INTERSECTING ROADS.

END ROAD WORK G20-2
 (PLACE 500 FT. PAST THE WORK LIMITS SHOWN ON THE TITLE SHEET)

ROAD WORK NEXT XX MILES G20-1
 (PLACE IN ADVANCE OF THE WORK LIMITS SHOWN ON THE TITLE SHEET)

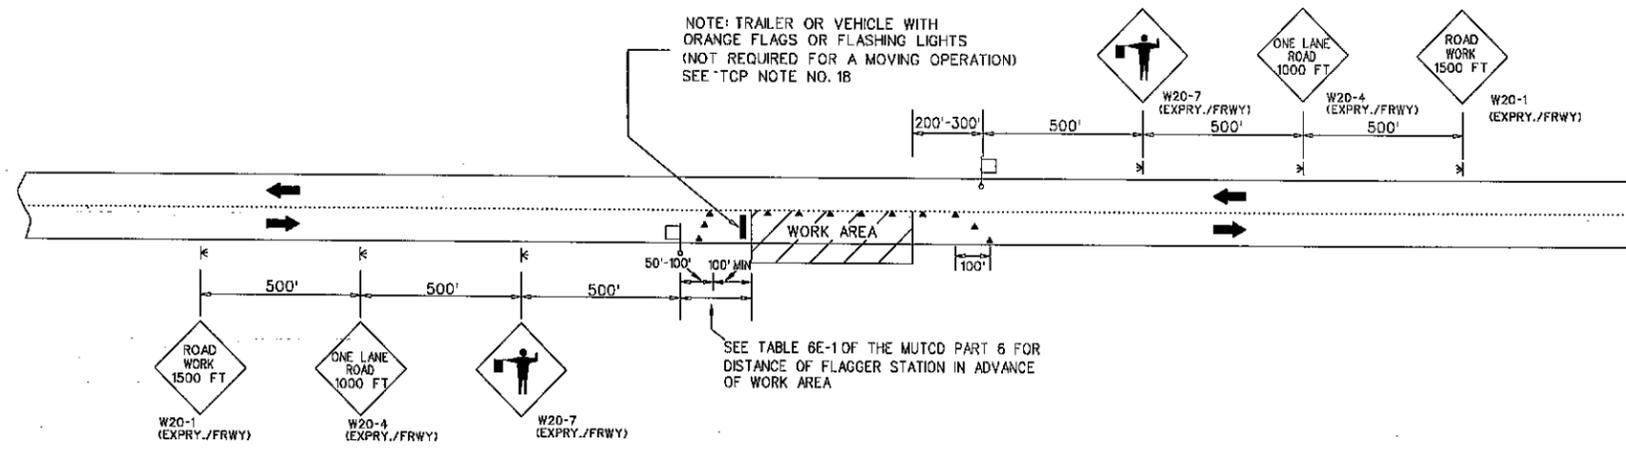


TWO LANE HIGHWAY - ONE LANE CLOSED
 FOR USE WITH CONES

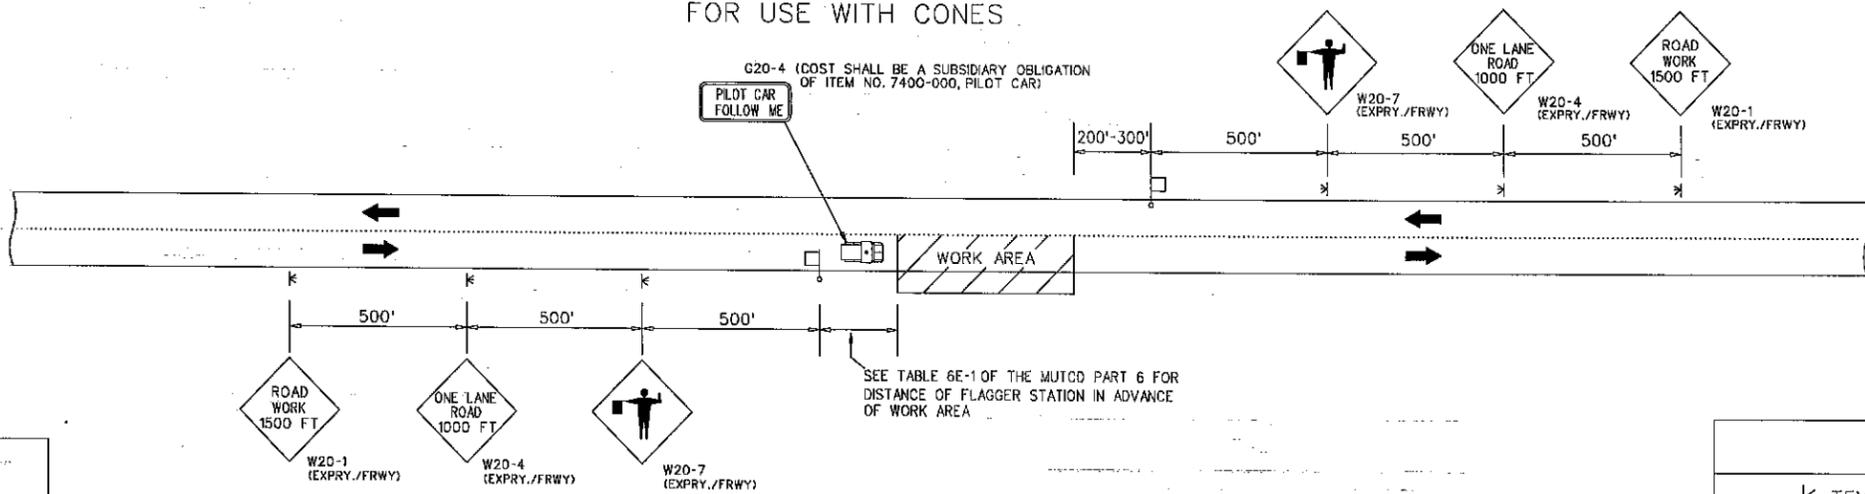


TWO LANE HIGHWAY - ONE LANE CLOSED
 FOR USE WITH PILOT CAR


LEGEND	
⊥	TEMPORARY MOUNTED SIGN
⊥	POST MOUNTED SIGN
▲	CONES
⊞	FLAGGER

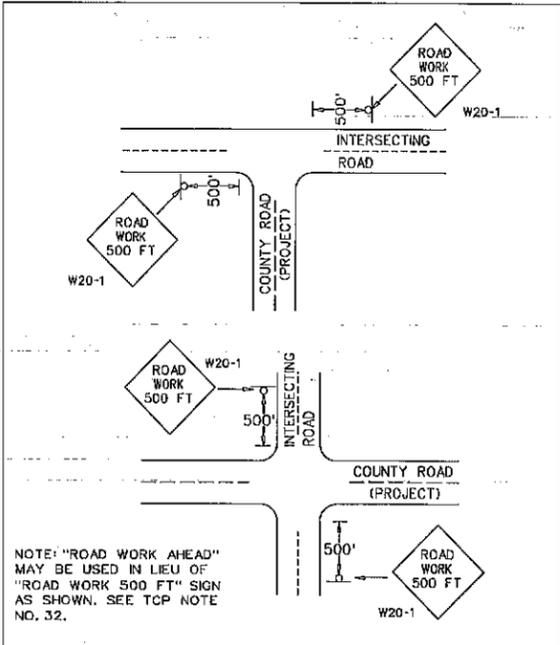

DETAIL FOR PLACEMENT OF W20-1 SIGN AT INTERSECTING ROADS

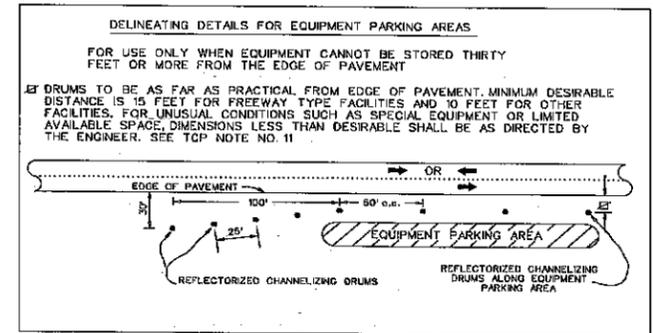

DELINEATING DETAILS FOR EQUIPMENT PARKING AREAS

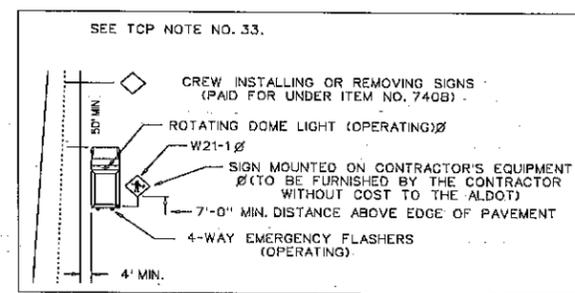

T.C.P. FOR INSTALLING OR REMOVING CONSTRUCTION SIGNS

REVISIONS	
DRAWN - 01/05/07	REVISED SIGNS BASED ON
REVISED NOTE - ADDED PAY PROVISIONS FOR W20-1(MIN) SIGN - 01/30/07	SIGN REVISIONS IN THE 2013 SPEC./STD. DRAWING BOOK
DELETED DETAILS FOR W20-1(MIN) SIGN - 11/27/07	10/30/12
REVISED NOTE NUMBER REFERENCES - 08/14/08	CHANGED BUREAU NAME IN TITLE BLOCK - 10/6/17
ADDED LEGEND - 07/16/09	REVISED LANE CLOSURE DIMENSIONS 12/16/19
ADDED PILOT CAR DETAIL 04/05/10	

ALABAMA DEPARTMENT OF TRANSPORTATION

LOCAL TRANSPORTATION BUREAU

TRAFFIC CONTROL PLAN

DETAILS FOR LANE CLOSURE

TWO LANE HIGHWAY

PILOT CAR AND/OR CONE APPLICATION

NOT TO SCALE

1. THE TRAFFIC CONTROL PLAN IS DEVELOPED IN CONFORMANCE WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, PART 6, 2009 EDITION. THE TRAFFIC CONTROL DEVICES INDICATED REPRESENT CONDITIONS KNOWN DURING PLAN DEVELOPMENT. IN THE EVENT ACTUAL PHYSICAL CONDITIONS WARRANT ADDITIONAL TRAFFIC CONTROL DEVICES, THEY SHALL BE INSTALLED IN CONFORMANCE WITH THE M.U.T.C.D., PART 6, AS DIRECTED BY THE ENGINEER. COST SHALL BE PAID FOR UNDER THE APPROPRIATE PAY ITEM.
2. THE CONTRACTOR MAY BE REQUIRED TO FURNISH ADDITIONAL WARNING SIGNS AND FLAGGERS NOT SHOWN ON THE TRAFFIC CONTROL PLAN WHENEVER HIS FORCES ARE WORKING ON, NEAR, OR CROSSING ANY CONNECTING ROADS OR STREETS. COST SHALL BE PAID FOR UNDER THE APPROPRIATE PAY ITEM.
3. ANY SIGNING OR OTHER TRAFFIC CONTROL DEVICES NOT SHOWN ON THIS TCP BUT DEEMED NECESSARY BY THE ENGINEER SHALL BE FURNISHED BY THE CONTRACTOR AND PAID FOR UNDER THE APPROPRIATE PAY ITEM.
4. WHERE THE LOCATION OF A REQUIRED SIGN FALLS ON A DRIVEWAY, SIDEWALK, BRIDGE, ETC., OR WHERE THE VISIBILITY OF A SIGN IS LIMITED TO THE TRAVELING PUBLIC, THE LOCATION SHALL BE ADJUSTED AS DIRECTED BY THE ENGINEER.
5. THE CONTRACTOR IS TO RELOCATE, COVER, OR REMOVE DURING CONSTRUCTION, AND THEN RESET OR UNCOVER UPON COMPLETION OF A PARTICULAR SECTION ANY CONFLICTING IN-PLACE ROADWAY SIGNS AND DELINEATORS, AS DIRECTED BY THE ENGINEER. SIGNS REQUIRING REMOVAL SHALL BE STOCKPILED AS DIRECTED BY THE ENGINEER AND SHALL BECOME THE PROPERTY OF THE COUNTY. COST SHALL BE A SUBSIDIARY OBLIGATION OF ITEM 740B.
6. ALL VEHICLES, EQUIPMENT, PERSONNEL (EXCEPT FLAGGERS) AND THEIR ACTIVITIES ARE RESTRICTED AT ALL TIMES TO ONE SIDE OF THE PAVEMENT UNLESS AUTHORIZED BY THE ENGINEER.
7. FLAGGERS SHALL BE PROPERLY ATTIRED, EQUIPPED WITH STAFF MOUNTED STOP/SLOW PADDLES IN SIGHT OF EACH OTHER, OR HAVE DIRECT COMMUNICATIONS AT ALL TIMES. FLAGGER STATION LOCATIONS MAY BE VARIED FROM THOSE SHOWN BASED ON ROADWAY ALIGNMENT AND CONDITIONS AT THE TIME OF THE LANE CLOSURE.
8. ALL TRAFFIC CONTROL DEVICES THAT ARE NOT APPLICABLE AT ANY SPECIFIC TIME SHALL BE COVERED OR REMOVED, AS DIRECTED BY THE ENGINEER. COST SHALL BE A SUBSIDIARY OBLIGATION OF ITEM 740B.
9. OMIT
10. CONSTRUCTION SIGNS MOUNTED ON A SINGLE OR DUAL SQUARE TUBULAR OR U-CHANNEL POST SHALL BE INSTALLED AS SHOWN ON SPECIAL DRAWINGS IHS-710-21 AND IHS-710-23.
11. DURING NON-WORKING HOURS, NO EQUIPMENT OR MATERIAL SHALL BE PARKED OR STORED CLOSER THAN 30 FEET TO THE EDGE OF ANY ROADWAY CARRYING TRAFFIC. WHEN THIS IS NOT PRACTICAL, IT SHALL BE PLACED IN AN AREA APPROVED BY THE ENGINEER AND DELINEATED BY REFLECTORIZED DRUMS. THIS INCLUDES STORAGE OF TRAFFIC CONTROL DEVICES SUCH AS TRAILER MOUNTED OR OTHER TEMPORARY SIGNS, BARRICADES, DRUMS, ETC., WHICH ARE NOT IN USE DURING NON-WORKING HOURS. TO BE FURNISHED BY THE CONTRACTOR WITHOUT COST TO THE ALABAMA DEPARTMENT OF TRANSPORTATION.
12. DURING THE WIDENING OR RESURFACING OF ANY ROADWAY CARRYING TRAFFIC, THE CONTRACTOR SHALL DRESS SHOULDERS TO THE EDGE OF PAVEMENT TO PREVENT TEMPORARY DROP-OFFS IN EXCESS OF 2 INCHES AFTER EACH DAYS PAVING IS COMPLETE. COST TO BE A SUBSIDIARY OBLIGATION OF THE ASSOCIATED PLANT MIX ITEM.
13. A DIFFERENCE IN ELEVATION OF APPROXIMATELY TWO (2) INCHES OR LESS AT THE CENTERLINE MAY BE ALLOWED DURING NON-WORKING HOURS WITHOUT ADDITIONAL TRAFFIC CONTROL. SPECIAL CONDITIONS MAY EXIST WHERE PROTECTION SHOULD BE PROVIDED WHERE THE DIFFERENCE IS TWO (2) INCHES OR LESS.
14. THE CONTRACTOR SHALL PLACE ALL ADVANCE WARNING SIGNS BEFORE PROCEEDING WITH HIS WORK. SIGNS SHALL BE PLACED IN ORDER IN THE DIRECTION OF TRAFFIC AND REMOVED IN REVERSE ORDER.
15. THE CONTRACTOR SHALL MAINTAIN AT LEAST ONE ACCESS TO BUSINESSES AND RESIDENCES DURING ALL PHASES OF CONSTRUCTION.
16. OMIT

17. THE W20-7 AND W20-4 SIGNS SHALL BE PLACED AT THE APPROPRIATE TIME AND SHALL BE COVERED OR REMOVED WHEN FLAGGERS ARE NOT ON DUTY AND DURING NON-WORKING HOURS.
18. TRAILER OR VEHICLE WITH FLAGS OR LIGHTS, REQUIRED BY THIS SCHEME, SHALL BE A SUBSIDIARY OBLIGATION OF ITEM 740B.
19. ALL CONTRACTOR'S EMPLOYEES PERSONAL VEHICLES AND CONTRACTOR'S EQUIPMENT NOT IN OPERATION SHALL BE PARKED A MINIMUM OF 30 FEET FROM THE TRAVELED WAY DURING WORKING HOURS, SO AS NOT TO CREATE A HAZARD. EQUIPMENT AND VEHICLES MAY BE PARKED CLOSER IF OUTSIDE THE CLEARZONE AND WITH PERMISSION OF THE ENGINEER.
20. REQUIRED TEMPORARY ROUTE MARKER ASSEMBLIES THAT ARE TO BE LOCATED IN THE VICINITY OF EXISTING ROUTE MARKERS SHOULD BE PLACED ALONG SIDE OF THOSE ALREADY IN PLACE. SOME EXISTING ROUTE MARKERS MAY HAVE TO BE COVERED OR REMOVED, AS DIRECTED BY THE ENGINEER. COST SHALL BE A SUBSIDIARY OBLIGATION OF ITEM 740B.
21. LONGITUDINAL DIMENSIONS MAY BE ADJUSTED SLIGHTLY TO FIT FIELD CONDITIONS. THE LATERAL PLACEMENT OF THE FLAGGER MAY BE VARIED FROM THAT SHOWN.
22. ALL SIGNS SHALL BE POST MOUNTED IF THE WORK PERIOD EXCEEDS FOUR DAYS, EXCEPT FOR THOSE SIGNS WHICH ARE MOUNTED ON BARRICADES. FOR REPEATED DAY OPERATIONS IN THE SAME LOCATIONS, WHEN ALL DEVICES ARE REMOVED AT NIGHT, SIGNS MAY BE MOUNTED ON TEMPORARY SUPPORTS.
23. THE CONTRACTOR MAY USE TYPE IV OR VIII BLACK AND FLOURESCENT ORANGE CONSTRUCTION SIGNS FROM THE 2018 SPECIAL AND STANDARD HIGHWAY DRAWINGS IN LIEU OF THE TYPE XI BLACK AND FLOURESCENT ORANGE CONSTRUCTION SIGNS SPECIFIED IN THE 2019 SPECIAL AND STANDARD HIGHWAY DRAWINGS.
24. PAVING OPERATIONS SHALL BE CONFINED TO ONE LANE IN THE DIRECTION OF TRAFFIC.
25. FOR MOVING OPERATIONS, THE TRAFFIC CONES MAY BE DELETED IF FLAGGERS ARE IN SIGHT OF EACH OTHER ON A TWO LANE ROADWAY.
26. CHANNELIZING DEVICES ARE TO BE EXTENDED TO A POINT WHERE THEY ARE VISIBLE TO APPROACHING TRAFFIC.
27. TAPER SHOULD BE FORMED BY PLACING ONE CONE FOR EACH FOOT OF LANE WIDTH.
28. THE SPACING BETWEEN CHANNELIZING DEVICES IN A WORK AREA SHOULD BE APPROXIMATELY EQUAL TO TWO TO FOUR TIMES THE SPEED LIMIT. FOR LOW SPEED ROADS AND STREETS, A CLOSER SPACING SHOULD BE USED.
29. THE LIMITS OF THE WORK AREA SHALL BE DETERMINED BY THE ENGINEER, BUT IN NO CASE SHALL THE WORK LIMITS EXCEED THE LENGTH OF 1/2 DAY'S PLANNED OPERATION OR ONE MILE, WHICHEVER IS LESS.
30. OMIT
31. DURING PLACEMENT OF GUARDRAIL AND/OR GUARDRAIL END ANCHORS, A REFLECTORIZED DRUM WITH A LIGHTWEIGHT TYPE "B" WARNING LIGHT (WEIGHING 3.3 POUNDS OR LESS) SHALL BE PLACED BEFORE THE END OF ANY EXPOSED GUARDRAIL AT NIGHT WHERE THE GUARDRAIL END ANCHOR CANNOT BE PLACED/REPLACED IN ONE DAY'S TIME. SEE SUBARTICLE 630.03(d) OF THE STANDARD SPECIFICATIONS.
32. ONE W20-1 SIGN (ROAD WORK 500 FT) HAS BEEN SET UP TO BE USED AT EACH INTERSECTING STREET OR ROAD. A W20-1 (STD.) SIGN (3' X 3') SHOULD BE USED FOR LOW VOLUME, LOW SPEED INTERSECTING STREETS / ROADS. A W20-1 (EXPRY./FRWY.) SIGN (4' X 4') SHOULD BE USED FOR HIGH VOLUME, HIGH SPEED INTERSECTING STREETS / ROADS.
33. IF THE CONTRACTOR CHOOSES TO SPLICE THE REQUIRED POST MOUNTED CONSTRUCTION SIGNS, THEY SHALL BE SPLICED AS SHOWN ON SPECIAL DRAWING IHS-710-23.

ADDITIONAL NOTES FOR TRAFFIC CONTROL PLAN UTILIZING CONES FOR LANE CLOSURE.

REVISIONS	
DRAWN - 01/05/07	3/04/14 - REVISED NOTE 11 TO OMIT REFERENCE TO ANOTHER SHEET.
08/08/08 - Revised Note 12 & Added Note 13.	3/20/15 - REVISED NOTE 10 TO OMIT REFERENCE TO SPECIAL DRAWING IHS-710-12.
01/21/10 - Deleted Note 16	9/23/15 - DELETED NOTE 23 AND REVISED NOTE 12
04/05/10 - Revised Note 30	8/7/17 - REVISED NOTE 11
03/29/11 - Revised Notes 10 and 33	CHANGED BUREAU NAME IN TITLE BLOCK - 10/6/17
04/13/11 - Revised Note 31	12/5/18 - DELETED NOTE 30
10/05/11 - Revised Notes 10 and 33	1/28/19 - ADDED NOTE 23
02/10/12 - Revised Note 1	
10/30/12 - REVISED NOTES 12, 17, & 32 BASED ON SIGN REVISIONS IN THE 2013 SPEC./STD DRAWING BOOK.	
2/05/14 - DELETED NOTE 9	

ALABAMA DEPARTMENT OF TRANSPORTATION
 LOCAL TRANSPORTATION BUREAU
 TRAFFIC CONTROL PLAN
 STANDARD NOTE SHEET

PROJECT NO.	FISCAL YEAR	SHEET NO.
TCP 61-01-26	2026	9

34. THE CONTRACTOR AND THE CONSTRUCTION ENGINEER SHALL DISCUSS AND PLAN FOR THE HANDLING OF TRAFFIC FOR ALL HOLIDAYS BEFORE ANY WORK BEGINS. UNLESS OTHERWISE PRE-APPROVED BY THE REGION ENGINEER, THE FOLLOWING SHALL HOLD:

THE CONTRACTOR SHALL NOT HAVE A LANE CLOSURE DURING THE FOLLOWING PERIODS UNLESS OTHERWISE DIRECTED BY THE ENGINEER OR ALDOT:

- FOR CHRISTMAS AND NEW YEARS DAY:
FROM 11:59 PM DECEMBER 23 THROUGH 11:59 PM JANUARY 2.
- FOR NATIONAL MEMORIAL DAY AND LABOR DAY:
FROM 12:00 NOON THE FRIDAY BEFORE THE HOLIDAY THROUGH 11:59 PM THE DAY OF THE HOLIDAY.
- FOR INDEPENDENCE DAY (THE 4TH OF JULY):
FROM 12:00 NOON THE DAY BEFORE THE HOLIDAY TO 11:59 PM THE DAY OF THE HOLIDAY.
- FOR THANKSGIVING DAY:
FROM 12:00 NOON THE WEDNESDAY BEFORE THANKSGIVING DAY THROUGH 11:59 PM THE SUNDAY FOLLOWING THANKSGIVING DAY.

ANY OTHER STATE HOLIDAYS WILL BE HANDLED AS APPROVED BY THE PROJECT ENGINEER.

THE CONTRACTOR SHALL COORDINATE WITH THE ENGINEER AND LOCAL GOVERNMENT ON TRAFFIC AND/OR WORK RESTRICTIONS FOR LOCAL HOLIDAYS OR EVENTS NOT LISTED ON ALDOT'S LIST OF OFFICIAL HOLIDAYS.

REVISIONS		ALABAMA DEPARTMENT OF TRANSPORTATION
DRAWN - 03/04/13		
3/04/13 - ADDED NOTE 34 TO BE USED AS NEEDED		LOCAL TRANSPORTATION BUREAU
10/01/14 - REVISED NOTE 34 TO READ REGION ENGINEER		
CHANGED BUREAU NAME IN TITLE BLOCK - 10/6/17		TRAFFIC CONTROL PLAN STANDARD NOTE SHEET