

**BID SUBMITTAL FORM**  
**Alabama County Joint Bidding Program**  
**Heavy Equipment – Bid Item: Heavy Duty Motorgrader-Option A**

Company Name: THOMPSON TRACTOR COMPANY

Address: P.O. BOX 10367

BIRMINGHAM, AL 35202-0367

Bid Submitted by: JAY SMITH  
(Name of company representative)

Title: SALES OPERATIONS MANAGER e-mail address: JAYSMITH@THOMPSONTRACTOR.COM

Phone: (205) 849-4242 Fax: (205) 849-4394

By submitting this bid, we agree:

Initials

The equipment model number identified below meets the bid specs for this bid item

JAS

That the bid price will be honored for all counties for the period from Jan. 1, 2021 to Dec. 31, 2021.

JAS

The equipment will be delivered at the bid price to all counties participating in the joint bid program.

JAS

The company acknowledges the freight preparation and delivery price is to be included in the total bid price for the standard machine.

JAS

The company representative listed above will be the contact person for purchasing this bid item under the joint bid program.

JAS

The bid is accompanied by a current catalog or model specification document for the model number identified below.

JAS

The bid is accompanied by a copy of the manufacturer's standard warranty as required in the bid specifications.

JAS

The bid includes the e-verify documentation required by Alabama law.

JAS

If awarded the bid, a performance bond will be provided upon request.

JAS

The bid documents include the **Manufacturer's Suggested Retail Price Sheet (MSRP) for the Standard Machine.**

JAS

Total Bid Price for Standard Machine: \$ 260,636

(Total Bid Price for Standard Machine Includes Freight Preparation, Delivery and Standard Warranty Costs) \*

Freight Preparation and Delivery: \$ 7,600

(Included in Standard Machine Bid Price)

Manufacturer's Suggested Retail Price for Standard Machine: \$ 428,149

Equipment Model #: CATERPILLAR 150

Description: MOTOR GRADER

Signature of company representative submitting bid: \_\_\_\_\_



Title: SALES OPERATIONS MANAGER

\* **NOTE:** Award will be made based on the total cost of the **Standard Machine**. The total cost of the standard machine is to include the freight preparation, delivery and standard warranty cost. Freight preparation, delivery will be excluded from the total bid price of the standard machine in determining the percentage discount for any available options.



## BID SUBMITTAL FORM: OPTION COST SHEET

By submitting this bid, we agree:

To offer any available options at the percent difference between the Manufacturer's Suggested Retail Price Sheet and the actual bid price on the Standard Machine\*

JS

The bid documents include the **Manufacturer's Suggested Retail Price Sheet (MSRP)** for the Standard Machine

JS

Equipment Model #: CATERPILLAR 150

Description: MOTOR GRADER

Signature of company representative submitting bid: Jay Smith

Title: SALES OPERATIONS MANAGER

**\*Note:** The percent difference between the **Manufacturer's Suggested Retail Price Sheet (MSRP)** for the standard machine as specified by these **Bid Specifications** and the actual price bid by the vendor will be calculated to determine the percentage discount to be applied to any available options. The bid price of the freight preparation, delivery cost shall be excluded in determining the percentage discount to be applied to available options. Any individual county may choose to add any available option to the standard machine at the percentage discount at the time of purchase.

150	HEAVY DUTY MOTOR GRADER A	2021 Pricing
577-2897	150 MOTOR GRADER	\$393,496
385-9294	GLOBAL ARRANGEMENT	\$0
349-3048	14' PLUS MOLDBOARD	\$2,778
	BLADE, 14' X 27" X 1"	\$0
	INCLUDES END BITS WITH OVERLAY	\$0
337-7510	TOWING HITCH	\$556
394-4521	COLD WEATHER PACKAGE (ETHER STARTING AID)	\$778
358-9338	BLADE LIFT ACCUMULATORS	\$4,782
380-6774	PRECLEANER NON SY-KLONE	\$0
567-4688	TIER IV ENGINE	\$0
324-5328	GRAVITY ENGINE OIL DRAIN	\$0
242-5056	BASE HYDRAULICS	\$0
394-3945	HEAVY DUTY ELECTRIC STARTER	\$0
536-9969	FOLD DOWN LIGHTS	\$1,924
421-7810	HALOGEN ROADING LIGHTS	\$0
385-9554	CAB PLUS: (STANDARD GLASS)	\$1,131
397-7457	CAB PLUS: (INTERIOR) INCLUDES AM/FM RADIO	\$3,086
394-1492	SEAT BELT	\$0
464-6442	PRODUCT LINK, CELLULAR PLE641	\$0
535-3097	NO ACCUGRADE	\$0
483-2354	AUTO ARTICULATION DEMO	\$0
357-9151	BASIC JOYSTICK CONTROLS	\$0
540-2373	STANDARD FUEL TANK	\$0
542-4660	STANDARD FAN	\$0
252-0679	14.0R24 MX XGLA2 * G2 MICHELIN TIRES	\$11,049
	RADIAL TIRES WITH MULTI-PIECE RIMS	\$0
323-6970	GP GUARD HITCH	\$0
469-8157	COOLANT 50/50	\$0
0P-1939	WINDSHIELD WASHER	\$0
0P-3978	FUEL ANTIFREEZE	\$0
386-1254	ENGLISH LANGUAGE	\$0
442-9940	ENGLISH DECALS	\$0
338-1132	LED WARNING STROBE LIGHT	\$581
361-3137	WARNING LIGHT MOUNTING	\$742
308-9370	LOW FRONT HEADLIGHTS	\$657
396-3921	REAR VISION CAMERA	\$2,601
233-3295	OUTSIDE MOUNTED MIRRORS	\$505
366-2459	TRANSMISSION GUARD	\$3,485
	TOTAL BID PRICE FOR STANDARD MACHINE	\$260,636
	FREIGHT PREPARATION AND DELIVERY	\$7,600
	TOTAL MANUFACTURER'S SUGGESTED RETAIL PRICE FOR STANDARD MACHINE	\$428,149

# **BID SPECIFICATIONS FOR HEAVY DUTY MOTOR GRADER – OPTION A**

## **GENERAL**

These specifications shall be construed as the minimum acceptable standards for a heavy-duty motor grader. Should the manufacturer's current published data or specifications exceed these standards, the manufacturer's standards shall be considered minimum and shall be furnished. All integral parts not specifically mentioned in the scope of these specifications that are necessary to provide a complete working unit shall be furnished. Additionally, the machine offered for bid shall include all standard manufacturer's equipment. The motor graders must be a new current production model and shall meet all EPA and other applicable standards at the time of manufacture.

The use of specific names or numbers in the specifications is not intended to restrict the bidder or any seller or manufacturer, but is intended solely for the purpose of indicating the type, size, and quality of equipment considered best adapted to the uses of counties participating in this joint bid.

## **BID SUBMITTAL FORM**

Each bidder must submit his or her bid on the Bid Submittal Form included in the invitation to bid package. All written warranties to be submitted shall be attached to the Bid Submittal Form.

## **BID PRICE**

The price bid shall include all destination charges, delivery charges, title fees, rebates and all other applicable costs and refunds.

## **MANUALS**

Each unit shall be provided with one (1) copy of the operator's manual, one (1) copy of the repair manual and one (1) copy of the current parts manual. Units will not be accepted for delivery until the manuals as outlined above are received by the purchaser.

## **REPLACEMENT PARTS AVAILABILITY**

Parts must be available for 5 years or 7,500 hours of use for the piece of equipment bid. If replacement parts are not delivered within three (3) working days of an order being placed, the bidder will deliver an equivalent machine for the County to use at no cost to the County until such time as the parts are delivered to the County so it can affect repairs to its machine.

## **WARRANTY**

Bidders shall submit a copy of the manufacturer's standard warranty. Warranty shall include service response time of a maximum of 36 hours within notification by county.

Yes ☒ No ☐  
Page # \_\_\_\_\_  
or  
Attachment ☒



### ENGINE

Engine shall be a turbo-charged, direct injection, four-stroke, **6-cylinder** diesel engine and shall be electronically controlled for more efficient fuel injection and fuel burn.

**Engine Shall be designed and manufactured by the machine manufacturer.**

Yes ☒ No ☐  
Page # 1, 6, 23

Engine displacement shall not be less than **567 cu. in.** and shall develop, as standard, a rated net power of at least **200 HP** in 1<sup>st</sup> gear,

**210 HP** in 2<sup>nd</sup> gear, **220 HP** in 3<sup>rd</sup> gear,

**231 HP** in 4<sup>th</sup> gear, **236 HP** in 5<sup>th</sup> gear,

**241 HP** in 6<sup>th</sup> gear, **247 HP** in 7<sup>th</sup> gear

and **252 HP** in 8<sup>th</sup> gear.

Yes ☒ No ☐  
Page # 23

Engine shall be isolation/resilient mounted to minimize sound and vibration and shall meet currently required EPA emission regulations for manufacturer.

Yes ☒ No ☐  
Page # 6, 18, 23

Engine compartment enclosure doors shall be lockable without the use of external locks and accessible from the ground. All daily service points shall be accessible from ground level and grouped together.

Yes ☒ No ☐  
Page # 14, 17, 33  
Bid Spec. p. 2

Engine will increase its low idle to **1,000 rpm** when the battery voltage is below **24.5 volts** for more than **5 minutes** to ensure adequate system voltage and battery reliability.

Yes ☒ No ☐  
Page # 17, Bid Spec. p. 1

### STARTING SYSTEM

Shall be equipped with a **24-volt** electrical system. **100-amp** alternator.

Yes ☒ No ☐  
Page # 33

### TRANSMISSION-8 Forward Speeds and 6 Reverse Speeds

Shall be designed and built by the machine manufacturer and shall be a direct drive, power shift, counter-shaft type transmission.

Yes ☒ No ☐  
Page # 8, 11, 23

Shall be equipped with built-in self-diagnostic capability

Yes ☒ No ☐  
Page # 17

A controlled throttle shifting system shall be standard to smooth directional gear changes without use of the inching pedal.

Yes ☒ No ☐  
Page # 8

Electronic Throttle Control (cruise control) shall be standard and shall be controlled by a push button, located on a **3-axis** joystick as standard on the right joystick control for resuming and decreasing throttle set.

Yes ☒ No ☐  
Page # 5, 33

Direction control shall be a **3-position** rocker switch for selecting forward, neutral, and reverse, while gear selection shall be controlled by dual push-buttons for up-shifting and down-shifting, both of which shall be incorporated into a single, **3-axis**, multi-function, left-hand joystick control.

Yes ☒ No ☐  
Page # 6, Bid Spec. p. 3

Differential Lock/Unlock shall be electro-hydraulically controlled, via a push-button, located on a single **3-axis**, multi-function, right-hand joystick control.

Yes ☒ No ☐  
Page # Bid Spec. p. 3

Final drive shall be a planetary design.

Yes ☒ No ☐  
Page # Bid Spec. p. 2

Machine shall be equipped with an electronic inching pedal for improved modulation and machine control, and with electronic over-speed protection to protect the engine and transmission from over speeding.

Yes ☒ No ☐  
Page # Bid Spec. p. 2

Also, to be equipped with transmission guard.

Yes ☒ No ☐  
Page # 26

#### TANDEM

Machine to be equipped with differential lock/unlock electro-hydraulically controlled with a multi-disc design.

Yes ☒ No ☐  
Page # 8, 23, 24  
Bid Spec. p. 2

Tandems shall be capable of oscillating **15 degrees** front tandem up and **25 degrees** front tandem down, with full machine articulation and having no interference between tandem wheel and machine structure

Yes ☒ No ☐  
Page # 23, 24

#### CONTROLS AND HYDRAULICS

Hydraulics system shall be a closed center, load sensing type, with a variable Displacement, axial piston-type pump.

Yes ☒ No ☐  
Page # 10, Bid Spec. P. 4

Implement valves shall be electro-hydraulic, designed and built by the machine manufacturer.

Yes ☒ No ☐  
Page # 5, 10, Bid Spec. P. 4

Lock valves shall be integrated into the main implement valve to prevent cylinder drift.

Yes ☒ No ☐  
Page # Bid Spec. P. 4

Blade lift cylinders shall have independent float capability, actuated by two, multi-functioning, **3-axis** joystick controls and auxiliary controls inside the cab.

Yes ☒ No ☐  
Page # 10, Bid Spec. P. 4

Hydraulic controls shall be joystick actuated.

Yes ☒ No ☐  
Page # 5, 33



### BLADES

Machine shall be equipped with **14 ft. long, 24 in** high and no less than **7/8** in thick moldboard with hydraulic side shift and tip control.

Blade shall also include reversible overlay end bits.

All blade functions shall be hydraulically or electronically actuated.

Blade lift accumulators shall be available, to reduce vertical impact damage.

### DRAWBAR AND CIRCLE

Circle shall be a single piece, rolled-ring forging with raised wearing surface top and bottom

Must be equipped with replaceable wear strips between circle and support shoes.

Rear drawbar shall be equipped with slip clutch designed to protect the circle, drawbar, and moldboard from shock when end of blade encounters, hidden objects.

Drawbar shall feature welded protective wear plates to prevent lift group contact with the primary drawbar structure.

The circle shall be steel construction with 6 replaceable wear shoes.

### FRAME

Articulated type main frame.

Articulation joint shall have mechanical locking device to prevent frame articulation while servicing or transporting machine.

Shall be that of a flanged box section type frame that runs from the front bolster to the articulation joints.

### STEERING

Fully hydraulic, **2-cylinder** steering system, with front steering wheel angle not less than **47.5°** left or right.

Machine, drawbar, circle, and moldboard shall be controlled with a maximum of two multifunction, **3-axis**, joysticks, as standard.

Yes ☒ No ☐  
Page # 16, 150  
Price, Page →  
Yes ☒ No ☐  
Page # 34  
Yes ☒ No ☐  
Page # 9, 10

Yes ☒ No ☐  
Page # 15, 33, 34

Yes ☒ No ☐  
Page # Bid Spec. p. 7, 9

Yes ☒ No ☐  
Page # 9, 33

Yes ☒ No ☐  
Page # 15

Yes ☒ No ☐  
Page # Bid Spec. P. 6

Yes ☒ No ☐  
Page # 33, Bid Spec. P. 6, 7

Yes ☒ No ☐  
Page # 33

Yes ☒ No ☐  
Page # 33

Yes ☒ No ☐  
Page # 9

Yes ☒ No ☐  
Page # 24, Bid Spec. p. 4

Yes ☒ No ☐  
Page # 4, 33  
Bid Spec. p. 6

USE	REF NO.	LANE 2 / 3 MANDATORY	Ship Weight lbs	LIST PRICE AT DEALER
-----	------------	----------------------	--------------------	-------------------------

**LANE SELECTION**

OP-9002	LANE 2 ORDER . . . . .	0
	Only for dealers enrolled in the Base Orders Management (BOM) program.	
OP-9003	LANE 3 ORDER . . . . .	0

**REGIONAL PACKAGES****REGIONAL PACKAGES**

L	385-9294	GLOBAL ARRANGEMENT . . . . .	0
		Provides standard brake accumulators. For use in temperatures above -18C	
		CANNOT BE USED WITH: WEATHER, COLD PLUS	
L	385-9297	GLOBAL ARRANGEMENT, LOW AMBIENT . . . . .	0
		Provides brake accumulators for low ambient temperatures below -18C	
		CANNOT BE USED WITH: EU dealers	
		WEATHER, STANDARD	

**PERFORMANCE PACKAGES****MOLDBOARDS**

L	349-3046	MOLDBOARD, 12' . . . . .	0
		FOR USE IN LANE 3 ONLY	
		INCLUDES:	
		- Moldboard 12' x 24" x 7/8" (3658mm x 610mm x 22mm)	
		- Curved Cutting Edge, 6" X 5/8" (152mm x 16mm)	
		- End Bits, Standard, Without Overlay	
L	349-3047	MOLDBOARD, 14' BASIC . . . . .	347
		INCLUDES:	
		- Moldboard 14' x 24" x 7/8" (4267mm x 610mm x 22mm)	
		- Curved Cutting Edge, 8" x 3/4" (203mm x 19mm)	
		- End Bits, Standard, Without Overlay	
L	349-3048	MOLDBOARD, 14' PLUS . . . . .	650
		INCLUDES:	
		- Moldboard 14' x 27" x 1" (4267mm x 686mm x 25mm)	
		- Curved Cutting Edge, 8" x 3/4" (203mm x 19mm)	
		- End Bits, Standard, With Overlay	

**WORK TOOLS**

L	393-4882	NO HITCH . . . . .	0
L	337-7510	HITCH, TOWING . . . . .	0
		Retrieval hitch. Does not include pin	
L	324-0889	RIPPER/SCARIFIER . . . . .	2,120
		Hydraulic, rear mounted ripper with three straight ripper shanks.	
		Can accommodate two additional ripper shanks and nine scarifier teeth which must be ordered separately.	
		INCLUDES: Ripper Mounting	
		REQUIRES: HYDRAULICS BASE (RIP)	

Joystick controls shall be mounted to adjustable pedestals, hard mounted to the cab floor, independent of the operator seat.

Yes ☒ No ☐  
Page # 5, Bid Spec. p. 3

Joystick Steering capabilities shall be ISO 5010:1992

Yes ☒ No ☐  
Page # 26

Primary steering shall be achieved via a left-hand joystick, using an intuitive steering control system.

Yes ☒ No ☐  
Page # Bid Spec. p. 3

Secondary steering shall be a standard feature.

Yes ☒ No ☐  
Page # 15, 23

### TIRES

All **six** wheels shall be **10 in by 24 in size** multi-piece tire rims and shall provide mounting for **14.00 R24** tires.

Yes ☒ No ☐  
Page # 32

Tires shall be Goodyear, Bridgestone/Firestone, or Michelin only, **14.00 x R24** 12PR Bias Tires.

Yes ☒ No ☐  
Page # ISO Tire Options

### BRAKES

Service brakes shall be multi-disc, oil-cooled and completely sealed.

Yes ☒ No ☐  
Page # 8

### OIL ANALYSIS

To be included at no cost of the duration of the warranty period selected at intervals recommended by the manufacturer's warranty and maintenance schedule.

Yes ☒ No ☐  
Page # —

### WEIGHT (STANDARD OPERATING)

Base machine weight shall not be less than **38,190 lbs.** Weight shall include standard machine configuration, lubricants, coolants, full fuel tank and operator of **200lbs** This is factory specified operating weight only. No additional weights may be added for purpose of meeting these specifications.

Yes ☒ No ☐  
Page # 1, 25, 26



USE	REF NO.	LANE 2 / 3 MANDATORY	Ship Weight lbs	LIST PRICE AT DEALER
-----	------------	----------------------	--------------------	-------------------------

**COOLING (CONT.)****COOLING FAN (Cont.)**

L	585-8822	FAN, STANDARD, AWD ..... 0 Provides a hydraulically driven demand fan ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER		
L	585-8823	FAN, REVERSING, AWD ..... 0 Provides a hydraulically driven demand fan that can reverse direction to prevent debris build up on the cooling package and engine enclosure. Includes automatic and manual controls for airflow reversal. Recommended for applications with a high content of airborne debris ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER		

**TIRES, RIMS, AND WHEELS**

Tires listed below include a set of six tires.

\*\*To calculate tire loads with machine attachments, please reference the MG Tire Selection Pocket Guide (media #AEXQ0182), available on the Electronic Sales Library.

All tire selections should be made with consideration for planned machine attachments (OEM and aftermarket) and their additional weight. Each tire has a maximum load rating that is not to be exceeded. The tire selection should be based on the maximum of all tire position loads on the machine. Assistance for calculating the highest tire load can be found in the Tire Load Worksheet in the back of the Caterpillar Motor Graders Tire Selection Pocket Guide. Failure to abide by the load ratings of the tires without first consulting the local tire supplier representative could result in nullification of the tire warranty.

Due to industry-wide tire availability limitations, tire brand and type cannot be guaranteed. Every effort will be made to satisfy your tire choice, but we reserve the right to change to alternate tires. If the tire brand cannot be supplied, the dealer will be contacted to propose alternative tire options. The dealer will need to respond with an alternative tire selection within 72 hours. If no response is provided by the supplier, the order will default to a comparable tire. As a consequence of a tire change the total machine price will be decreased or increased relative to the price of the new tire selection.

The information provided can be used to make a tire selection based on the particular conditions at the site. When available, the tire manufacturer should be consulted regarding proper tire selection.

**TIRES (TANDEM MACHINES)**

USE	REF NO.	LANE 2 / 3 MANDATORY	Ship Weight lbs	LIST PRICE AT DEALER
-----	------------	----------------------	--------------------	-------------------------

**TIRES, RIMS, AND WHEELS (CONT.)****APPLICATION SPECIFIC**

L	515-5399	TIRES, 14.0R24 SOIL TRACTION MP . . . . . 0 Tire group received will be one of the tire groups listed below: - Bridgestone VKT 1* on 10" x 24" multi-piece rims. - Michelin XGLA2 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER
L	515-5400	TIRES, 17.5R25 SOIL TRACTION MP . . . . . 0 Tire group received will be one of the tire groups listed below: - Bridgestone VKT 1* on 14" x 25" multi-piece rims. - Michelin XTLA 1* on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER

**MAXAM**

L	578-9458	TIRES 17.5R25 MA MS202 ** MP . . . . . 0 Maxam MS202 2* on 14- x 25- multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8600 lbs) 3900kg.* ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER
---	----------	--

**GOODYEAR**

L	310-7325	TIRE, 17.5R25 GY RL2+ 6S 1*SP . . . . . 100 Goodyear RL2+ 6S on 13" x 25" multi-piece rims THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER
L	310-7326	TIRE, 17.5R25 GY RL2+ 6S 1*MP . . . . . 1,200 Goodyear RL2+ 6S on 14" x 25" multi-piece rims THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER

**BRIDGESTONE**

L	252-0714	TIRES, 14.0 R24 BS VKT * G2 MP . . . . . 1,540 FOR USE IN LANE 3 ONLY Bridgestone VKT 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER
L	252-0720	TIRES, 14.0R24 BS VUT * L2 MP . . . . . 1,012 FOR USE IN LANE 3 ONLY Bridgestone VUT 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER



USE	REF NO.	LANE 2 / 3 MANDATORY	Ship Weight lbs	LIST PRICE AT DEALER
-----	------------	----------------------	--------------------	-------------------------

## TIRES, RIMS, AND WHEELS (CONT.)

**BRIDGESTONE (Cont.)**

L	252-0775	TIRES, 17.5R25 BS VKT * D2A MP ..... 1,810 Bridgestone VKT 1* on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER		
L	252-0708	TIRES, 14.0R24 BS VSW * G2 MP ..... 1,481 Bridgestone VSW 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER		
L	310-7331	TIRES, 17.5R25 BS VSW * G2 MP ..... 1,888 Bridgestone VSW 1* on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER		
L	586-5268	TIRES, 14.00R24 BS VKT ***E-2MP ..... 0 6 X Bridgestone VKT 3* on 9- X 24- Single Piece Rims THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING 3650 kg (8045 LBS). ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER		

**FIRESTONE**

L	252-0731	TIRES, 17.5-25 FS SGG 12PR MP ..... 1,007 Firestone SGG 12PR on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (6393 lbs) 2900 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER		
L	252-0753	TIRES, 17.5-25 FS SRG 12PR MP ..... 1,061 FOR USE IN LANE 3 ONLY Firestone SRG LD 12PR bias (L3) on 14" multi-piece rim. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (6393 lbs) 2900 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER		

**MICHELIN**

L	252-0679	TIRES, 14.0R24 MX XGLA2 * G2 MP ..... 1,069 Michelin XGLA2 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (7824 lbs) 3550 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER		
L	252-0701	TIRES, 14.0R24 MX XSNO+ * G2 MP ..... 1,282 FOR USE IN LANE 3 ONLY Michelin XSNO 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (7824 lbs) 3550 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER		
L	252-0777	TIRES, 17.5R25 MX XSNO+ * G2 MP ..... 1,093 Michelin XSNO+ 1* on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER		

USE	REF NO.	LANE 2 / 3 MANDATORY	Ship Weight lbs	LIST PRICE AT DEALER
-----	------------	----------------------	--------------------	-------------------------

**TIRES, RIMS, AND WHEELS (CONT.)****MICHELIN (Cont.)**

L	252-0771	TIRES, 17.5R25 MX XTLA * L2 MP ..... 1,371 Michelin XTLA 1* on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER		
L	254-7904	TIRES, 14.0R24 MX XGLA2 * G2 SP ..... 709 Michelin XGLA 1* on 9" x 24" single piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (7824 lbs) 3550 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER		
L	254-7971	TIRES, 17.5R25 MX XTLA * L2 SP ..... 979 Michelin XTLA 1* on 13" x 25" single piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER		

**SHIPPING TIRES**

L	440-3433	TIRES, 17.5 SHIPPING, MP ..... 274 FOR USE WITH LANE 3 ONLY Due to the height of the shipping tires, unloading will most likely require a crane to avoid damaging the bottom of the machine. Shipping tire for use during shipment of machine only. Solid rubber band mounted on 14" x 25" multi-piece rims. Must be replaced with pneumatic tire before delivering to customer ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER		
L	448-5577	TIRES, 14.0 SHIPPING, MP ..... 90 FOR USE IN LANE 3 ONLY Due to the height of the shipping tires, unloading will most likely require a crane to avoid damaging the bottom of the machine. Shipping tire for use during shipment of machine only. Solid rubber band mounted on 10" x 24" multi-piece rims. Must be replaced with pneumatic tire before delivering to customer. ONLY FOR USE WITH: 577-2897 150 15A MOTOR GRADER		

**TIRES (AWD MACHINES)****APPLICATION SPECIFIC**

L	515-5404	TIRES, 14.0R24 SOIL TRACTION MP ..... 0 Tire group received will be one of the tire groups listed below: - Bridgestone VKT 1* on 10" x 24" multi-piece rims. - Michelin XGLA2 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER		
L	515-5405	TIRES, 17.5R25 SOIL TRACTION MP ..... 0 Tire group received will be one of the tire groups listed below: - Bridgestone VKT 1* on 14" x 25" multi-piece rims. - Michelin XTLA 1* on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER		



USE	REF NO.	LANE 2 / 3 MANDATORY	Ship Weight lbs	LIST PRICE AT DEALER
-----	------------	----------------------	--------------------	-------------------------

**TIRES, RIMS, AND WHEELS (CONT.)****MAXAM**

L	578-9462	TIRES 17.5R25 MA MS202 ** MP . . . . . 0 Maxam MS202 2* on 14- x 25- multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8600 lbs) 3900kg.** ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER
L	578-9463	TIRES 14.00R24 MA MS202 * MP . . . . . 0 Maxam MS202 1* on 10- x 24- multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8377 lbs) 3800kg.** ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER

**GOODYEAR**

L	310-7327	TIRES, GY17.5R25* COMBO MP . . . . . 1,200 Goodyear RL2+ 6S on 14" x 25" multi-piece rims THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER
---	----------	---

**BRIDGESTONE**

L	252-0722	TIRES, 14.0R24 BS VUT * L2 MP . . . . . 991 FOR USE IN LANE 3 ONLY Bridgestone VUT 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER
L	249-7841	TIRES, 17.5R25 BS VKT * D2A MP . . . . . 1,620 Bridgestone VKT 1* on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER
L	252-0716	TIRES, 14.0R24 BS VKT * G2 MP . . . . . 1,519 Bridgestone VKT 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER
L	252-0710	TIRES, 14.0R24 BS VSW * G2 MP . . . . . 1,459 FOR USE IN LANE 3 ONLY Bridgestone VSW 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER
L	310-7332	TIRES, 17.5R25 BS VSW * G2 MP . . . . . 1,698 FOR USE IN LANE 3 ONLY Bridgestone VSW 1* on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER

USE	REF NO.	LANE 2 / 3 MANDATORY	Ship Weight lbs	LIST PRICE AT DEALER
-----	------------	----------------------	--------------------	-------------------------

**TIRES, RIMS, AND WHEELS (CONT.)****BRIDGESTONE (Cont.)**

L	586-5273	TIRES, 14.00R24 BS VKT ***E-2MP . . . . . 0 FOR USE IN LANE 3 ONLY 6 X Bridgestone VKT 3* on 10- X 24- Multipiece Rims THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING 3650 kg (8045 LBS). ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER		
---	----------	---	--	--

**MICHELIN**

L	249-7845	TIRES, 14.0R24 MX XSNO + * G2 MP . . . . . 1,261 FOR USE IN LANE 3 ONLY Michelin XSNO 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (7824 lbs) 3550 kg.** ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER		
L	252-0681	TIRES, 14.0R24 MX XGLA2 * G2 MP . . . . . 1,048 Michelin XGLA2 1* on 10" x 24" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (7824 lbs) 3550 kg.** ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER		
L	252-0779	TIRES, 17.5R25 MX XSNO + * G2 MP . . . . . 903 FOR USE IN LANE 3 ONLY Michelin XSNO+ 1* on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER		
L	252-0773	TIRES, 17.5R25 MX XTLA * L2 MP . . . . . 268 Michelin XTLA 1* on 14" x 25" multi-piece rims. THE TIRE MANUFACTURER DOES NOT RECOMMEND THIS TIRE FOR INDIVIDUAL TIRE LOADS EXCEEDING (8045 lbs) 3650 kg.** ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER		

**SHIPPING TIRES**

L	440-3434	TIRES, 17.5 SHIPPING, AWD, MP . . . . . 83 FOR USE WITH LANE 3 ONLY Due to the height of the shipping tires, unloading will most likely require a crane to avoid damaging the bottom of the machine. Shipping tire for use during shipment of machine only. Solid rubber band mounted on 14" x 25" multi-piece rims. Must be replaced with pneumatic tire before delivering to customer ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER		
L	448-5584	TIRES, 14.0 SHIPPING, AWD, MP . . . . . 69 FOR USE WITH LANE 3 ONLY Due to the height of the shipping tires, unloading will most likely require a crane to avoid damaging the bottom of the machine. Shipping tire for use during shipment of machine only. Solid rubber band mounted on 10" x 24" multi-piece rims. Must be replaced with pneumatic tire before delivering to customer. ONLY FOR USE WITH: 577-2946 150 15A AWD MOTOR GRADER		



# A CLEAR LINE OF SIGHT DOWN THE ROAD OF INNOVATION

CAT<sup>®</sup> MOTOR GRADERS. NEW NAMES. SAME PRODUCTIVITY AND COMFORT.



<b>120</b> ≈ 120K 120M 120M2	<b>140</b> ≈ 12M 12M3	<b>150</b> ≈ 140M 140M3	<b>160</b> ≈ 160M 160M3	<b>14</b> ≈ 14M3	<b>16</b> ≈ 16M3	<b>18</b> ≈ 18M3	<b>24</b> ≈ 24M
--	--------------------------------	----------------------------------	----------------------------------	------------------------	------------------------	------------------------	-----------------------

LEAVE UNTIL NPL

© 2004 Caterpillar Inc. All rights reserved. "Caterpillar" and "CAT" are registered trademarks and "Thompson" is a trademark of Caterpillar Inc. in the United States and other countries.

Caterpillar is changing the nomenclature on some of our most popular machines. As a technology leader, we are constantly updating our product lines with new innovative features designed to help you be more productive and efficient. Some of the most important designation updates will take place across the motorgrader line. Check out our all new lineup.

## Small Motorgraders:

120 = 120K, 120M, 120M2  
140 = 12M, 12M3  
150 = 140M, 140M3  
160 = 160M, 160M3

## Large Motorgraders:

14 = 14M3  
16 = 16M3  
18 = 18M3  
24 = 24M

For more information on the products carried by Thompson Tractor, visit: [thompsontractor.com/machines/new](http://thompsontractor.com/machines/new)

# Thompson



## What it takes.



# M Series 3

## Motor Graders



	12M3/12M3 AWD		140M3/140M3 AWD		160M3/160M3 AWD	
Engine Model	Cat® C9.3 ACERT™		Cat C9.3 ACERT		Cat C9.3 ACERT	
Base Power (1st gear) – Net	133 kW	179 hp	149 kW	200 hp	165 kW	221 hp
Base Power (1st gear) – Net (Metric)		181 hp		202 hp		224 hp
VHP Plus Range – Net	133-172 kW	179-231 hp	149-188 kW	200-252 hp	165-203 kW	221-272 hp
VHP Plus Range – Net (Metric)		181-234 hp		202-255 hp		224-276 hp
AWD Range – Net	141-188 kW	189-252 hp	156-203 kW	210-272 hp	172-219 kW	231-293 hp
AWD Range – Net (Metric)		192-255 hp		213-276 hp		234-298 hp
Moldboard – Blade Width	3.7 m	12 ft	3.7 m	12 ft	4.2 m	14 ft
Operating Weight, Typically Equipped	19 344 kg	42,647 lb	19 935 kg	43,950 lb	20 660 kg	45,547 lb
Operating Weight, Typically Equipped AWD	20 236 kg	44,614 lb	20 827 kg	45,917 lb	21 552 kg	47,514 lb



## Features

### Emissions Reduction

*Cat emissions reduction technology is designed to be transparent to the operator and meets U.S. EPA Tier 4 Final/EU Stage IV emission standards.*

### Operator Comfort

*Industry leading cab and intuitive joystick controls give you unmatched comfort and visibility. New seat offers you heated/ventilated options.*

### Ease of Service

*Drawbar-Circle-Moldboard features make it easy to maintain factory tightness for better grading results. New engine enclosure lights make service more convenient in low light.*

### Efficient Performance

*New Economy Mode helps you save fuel – up to 10 percent.*

### Integrated Technologies


*Cat Connect makes smart use of technology and services to help you monitor, manage and enhance job site operations.*

### Safety

*Features like Operator Not Present monitoring, hydraulic lockout and redundant steering and braking systems help you meet your safety goals.*

## Contents

Operator Station.....	4
Machine and Implement Controls.....	5
Engine .....	6
Emissions Technology.....	7
Power Train.....	8
Structures and Drawbar-Circle-Moldboard....	9
Hydraulics .....	10
All Wheel Drive (AWD).....	11
Integrated Technologies.....	12
Safety.....	14
Work Tools and Attachments.....	16
Smart Machine Systems.....	17
Serviceability and Customer Support.....	17
Sustainability .....	18
Specifications.....	19
Standard Equipment.....	33
Optional Equipment.....	34
Notes.....	35

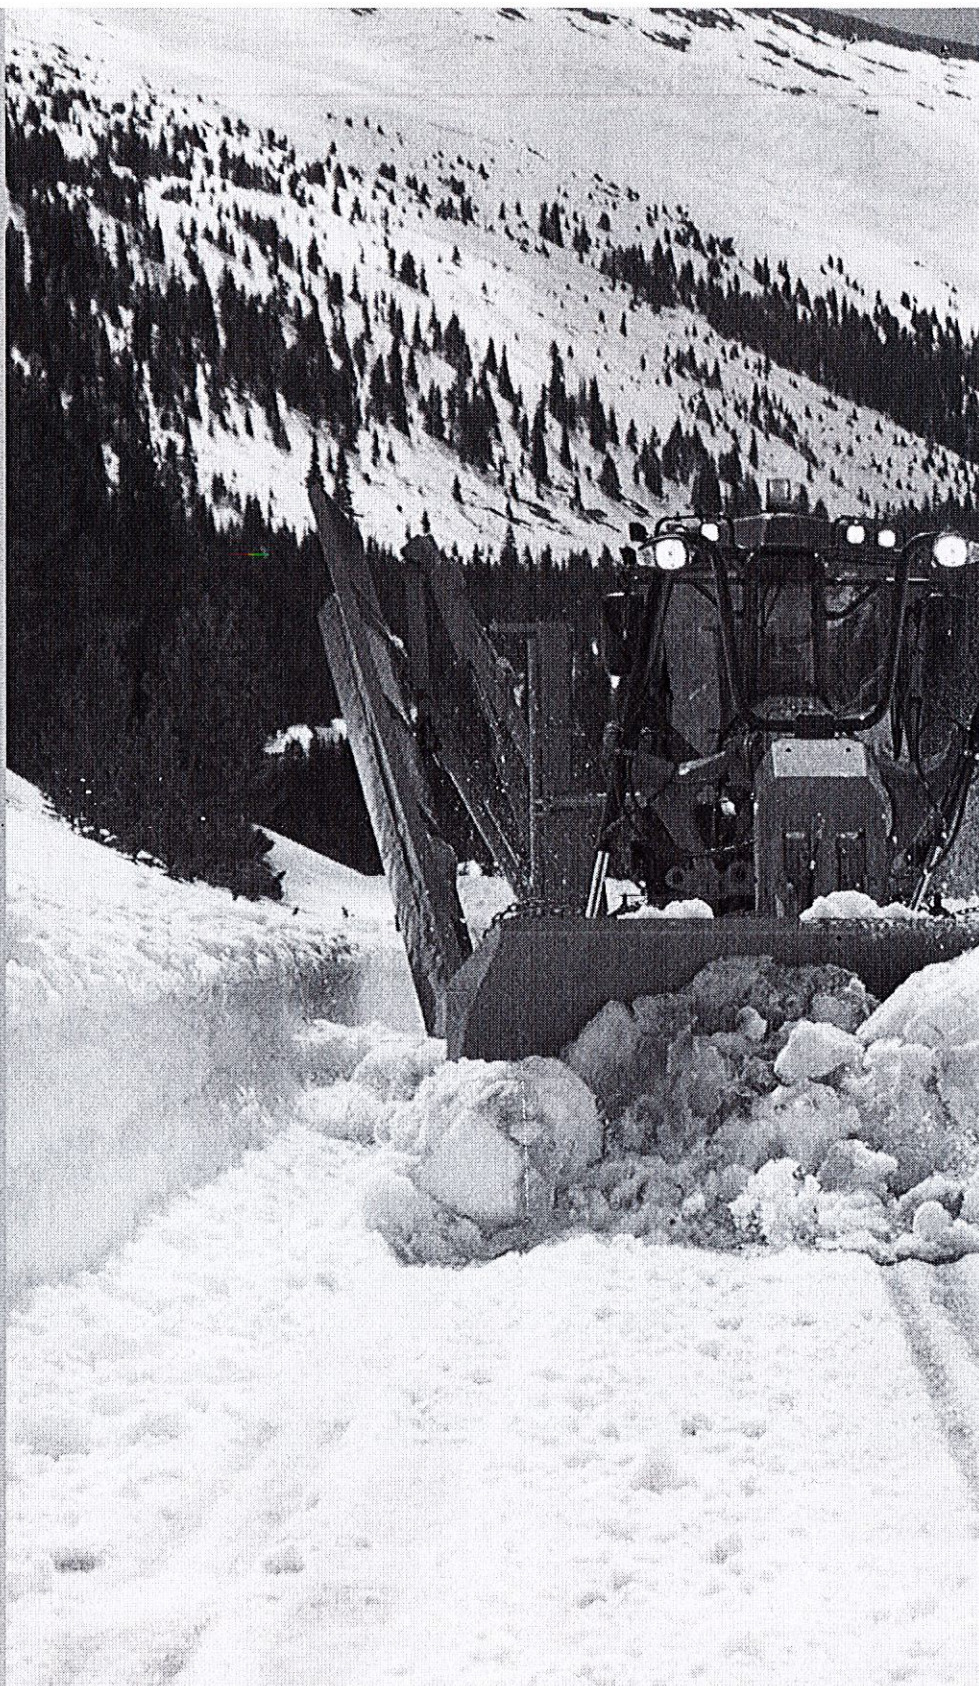






**The M Series 3 brings the latest emissions reduction technology to the most durable, productive and comfortable motor graders on the market. From building roads to maintaining them, M Series Motor Graders are designed to help you get more work done in less time. Outstanding durability, unprecedented operator comfort and ease of service help to maximize your return on investment. M Series 3 Motor Graders meet U.S. EPA Tier 4 Final/EU Stage IV emission standards.**



# Operator Station

Comfort, productivity, advanced technology

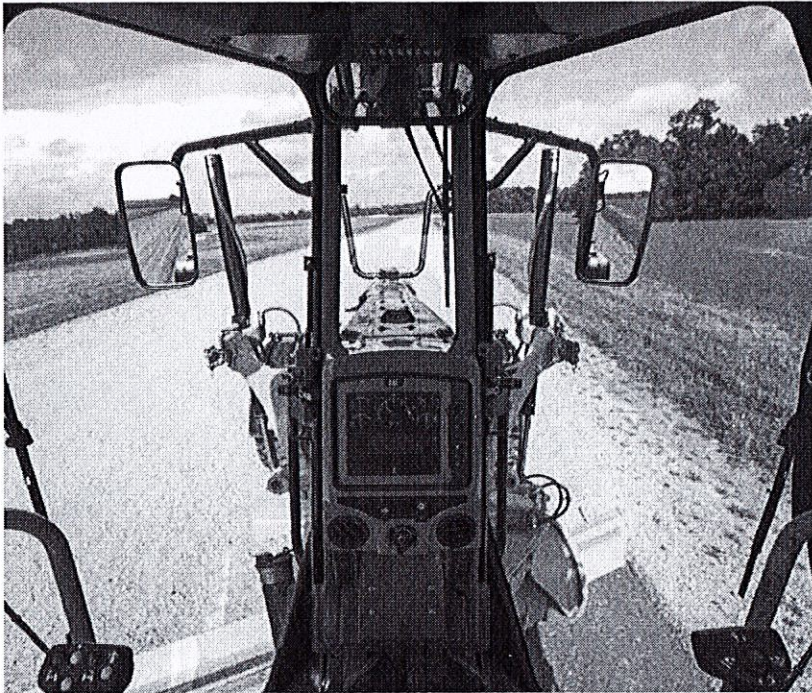

## Visibility

Good visibility is key to your safety and efficiency. Angled cab doors, tapered engine enclosure and a sloped rear window make it easy to see the moldboard and tires, as well as behind the machine. An optional rear vision camera further enhances lines of sight all around the machine.

## In-Dash Instrument Cluster



A redesigned message display shows machine performance and diagnostic information, including DEF tank levels. Now located in the center console, it also displays Cat Grade Control Cross Slope readings conveniently in front of the operator.

## Comfort and Control

Experience the most comfortable cab in the industry. Joystick controls replace levers, so hand and arm movement is reduced by 78%, helping reduce operator fatigue for better productivity. Rocker and control switches are in easy reach.

An updated seat with softer cushions and three-position cushion tilt adds to your overall comfort. You can even upgrade to a heated or heated/ventilated seat. An optional seat belt indicator feature is also available. Control pods can be adjusted electronically, making it easy to set your ideal operating position. Multiple isolation mounts significantly reduce sound and vibration for a more relaxed work environment.

The high capacity Heating, Ventilation and Air Conditioning (HVAC) system dehumidifies and pressurizes the cab, seals out dust and helps keep windows clear. Pop-out louvers circulate fresh air. An optional deluxe radio with CD features MP3 and Bluetooth technology.

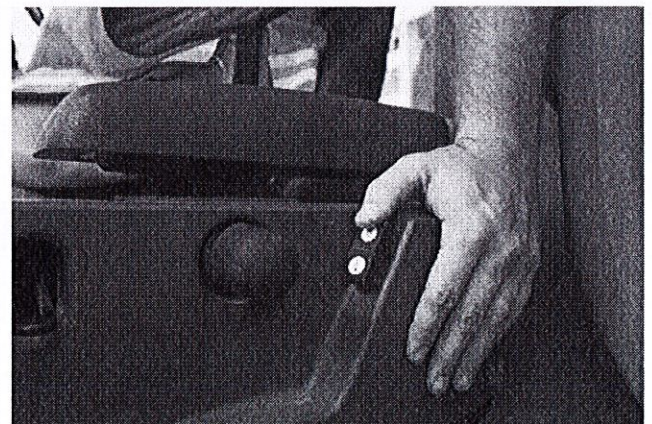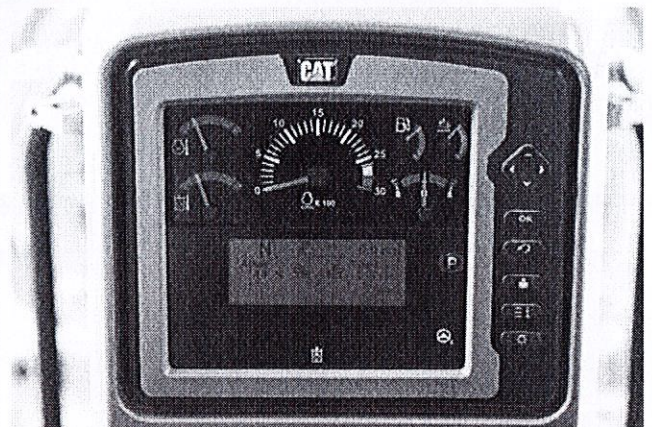



# Machine and Implement Controls

Unprecedented precision and ease of operation



Two electro-hydraulic joysticks with electronically adjustable control pods help position operators for optimal comfort, visibility and productive operation.

## Joystick Functions

The left joystick controls machine direction, steering, articulation, return-to-center, wheel lean, gear selection, left moldboard lift cylinder and float.

The right joystick controls drawbar, circle and moldboard functions as well as electronic throttle control and manual differential lock/unlock.

The steer tire angle matches the joystick position. A brake tensioning system holds the joystick in position until the operator moves it. The steering control automatically reduces steering sensitivity at higher ground speeds for predictable control.

Infinitely variable roller switches control the rear ripper and/or front lift group (when equipped). Optional Programmable Auxiliary Hydraulic Pod controls up to six additional hydraulic circuits.

## Electronic Throttle Control


Electronic Throttle Control helps improve productivity by providing the best match of horsepower and torque for the demands of the application.

## Articulation Return-to-Center

Automatically returns the machine to a straight frame position from any angle with the touch of a button.

## Selectable Blade Lift Modes


Choose the blade lift modulation mode that best fits your application or operating style: Fine, Normal, or Coarse.

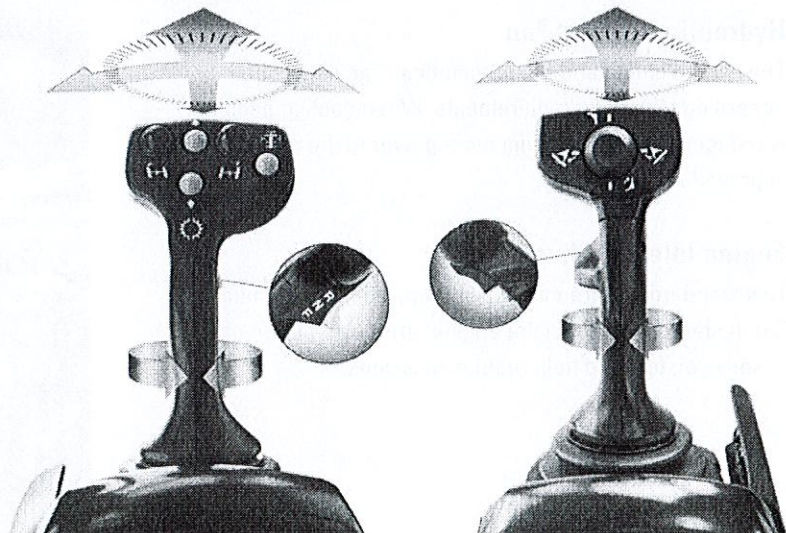



# Engine

Power and reliability

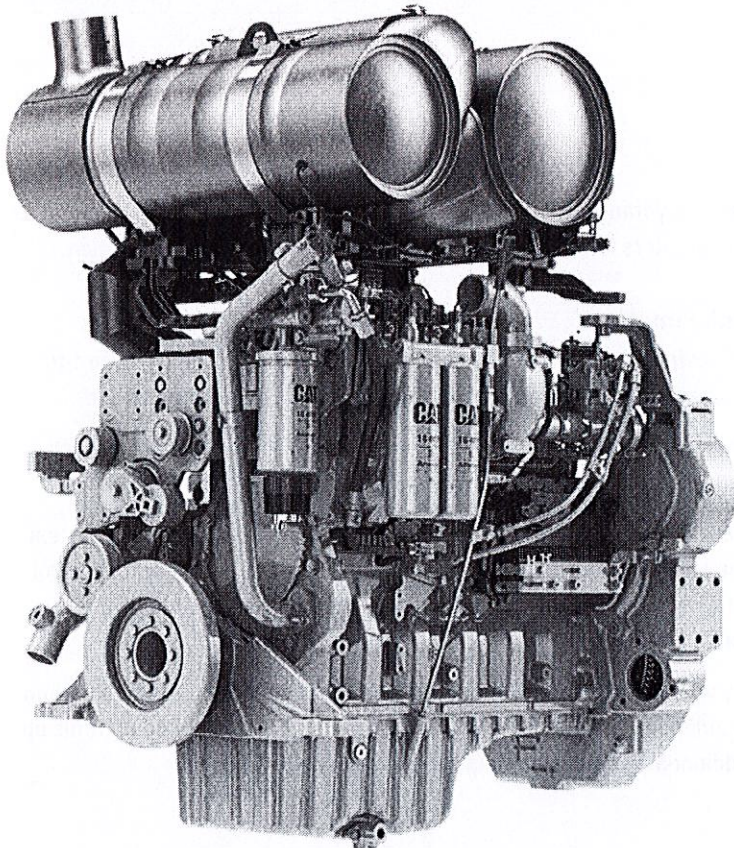


A Cat C9.3 ACERT engine gives you the performance you need to maintain consistent grading speeds for maximum productivity. Every U.S. EPA Tier 4 Final/EU Stage IV ACERT engine is equipped with a combination of proven electronic, fuel, air and aftertreatment components. Applying proven technologies systematically and strategically helps meet your high expectations for productivity, fuel efficiency, reliability and service life.

## Hydraulic Demand Fan

The hydraulic demand fan automatically adjusts speed according to cooling requirements. When cooling demand is reduced, you benefit from more power to the ground and improved fuel efficiency.

## Engine Idle Shutdown Timer


This standard feature can be software-enabled by your Cat dealer to shut down the engine after a set period of time to save you fuel and help reduce emissions.

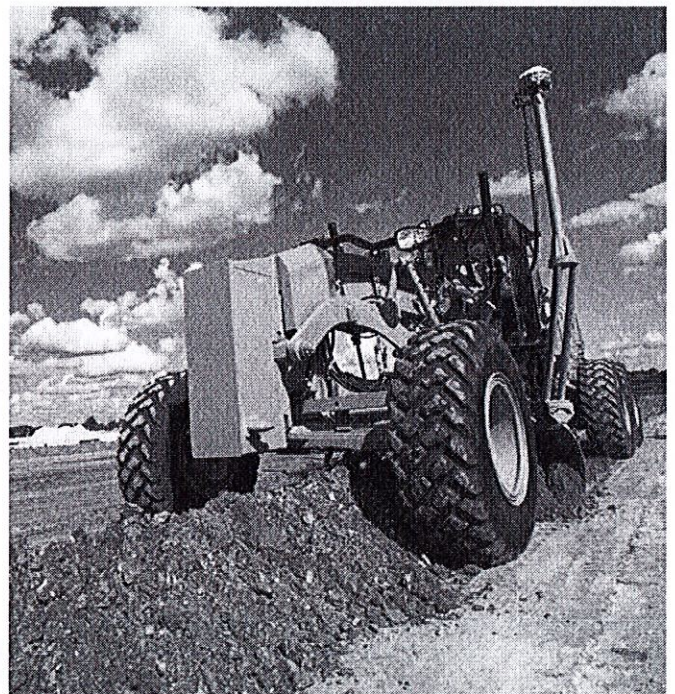



# Emissions Technology

Proven, integrated solutions

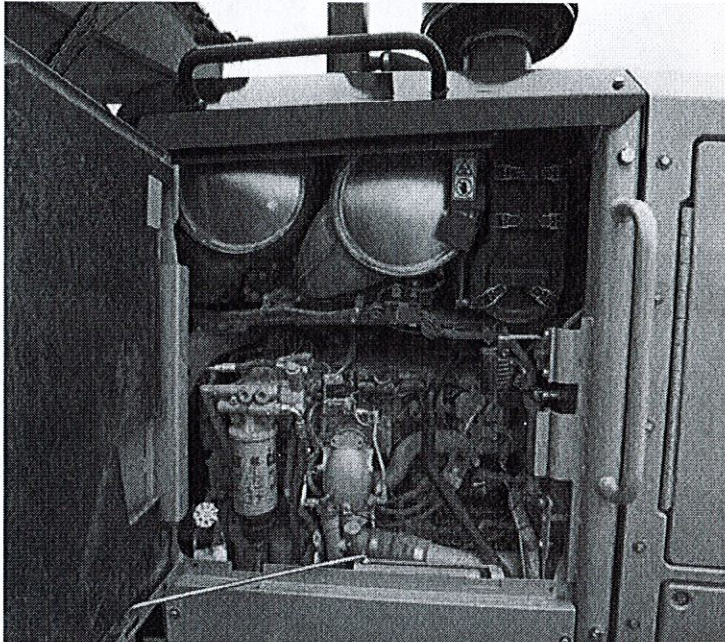

Emissions reduction technology on the M Series 3 Motor Grader is designed to be transparent, with no action required from the operator. There is no need to stop. Regeneration runs automatically at cold start-up and, if needed, in the background while you work.

## Aftertreatment Technologies


Caterpillar designed Tier 4 Interim products with Tier 4 Final standards in mind. To meet the additional 80 percent reduction in NOx emissions required by EPA Tier 4 Final/EU Stage IV emission standards, Caterpillar engineers only needed to add one new system to the already proven aftertreatment solution in use, Selective Catalytic Reduction (SCR).

## Diesel Exhaust Fluid

Selective Catalytic Reduction utilizes Diesel Exhaust Fluid (DEF), which can be conveniently filled from ground level. Simply refill the DEF tank when you refuel. A gauge on the dash shows your fluid level.

When you turn the machine off, a pump will automatically purge the DEF lines. A light located inside the rear engine compartment will turn off, telling you the purge is complete and that it is safe to turn off the electrical disconnect. If the engine/aftertreatment temperatures are high, a Delayed Engine Shutdown will activate automatically to cool the machine and then purge the lines.

For complete aftertreatment information, please refer to your machine's Operation and Maintenance Manual.

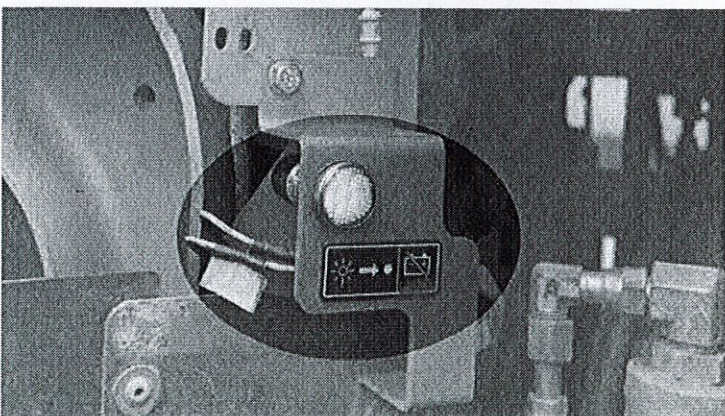



# Power Train

## Maximum power to the ground




- Standard Automatic Differential Lock/Unlock monitors machine and application parameters to unlock/re-lock the differential during operation, improving production and enhancing comfort while protecting the power train.
- Full Electronic Clutch Pressure Control optimizes inching modulation for smooth shifts and directional changes.
- Programmable Autoshift option simplifies operation by allowing you to program the transmission to shift at optimal points to match your application.
- New standard Economy Mode can be turned on to help save fuel by reducing engine speed so the machine works in a more efficient range. The average fuel savings is up to 10 percent, depending on the application.
- Power Shift Countershaft Transmission maximizes power to the ground.
- Engine Over-Speed Protection prevents downshifting until an acceptable safe travel speed has been established.

### Front and Rear Axles

The sealed spindle keeps front axle bearings lubricated and protected from contaminants. The Cat "Live Spindle" design places the larger tapered roller bearing on the outside, where the load is greater, extending bearing life. A bolt-on modular rear axle improves serviceability and contamination control with easy access to differential components.

### Hydraulic Brakes


Oil-bathed multi-disc service brakes are hydraulically actuated for smooth, predictable braking and lower operating costs. Brakes are located at each tandem wheel and have a large total brake surface area to give you dependable stopping power and longer life.

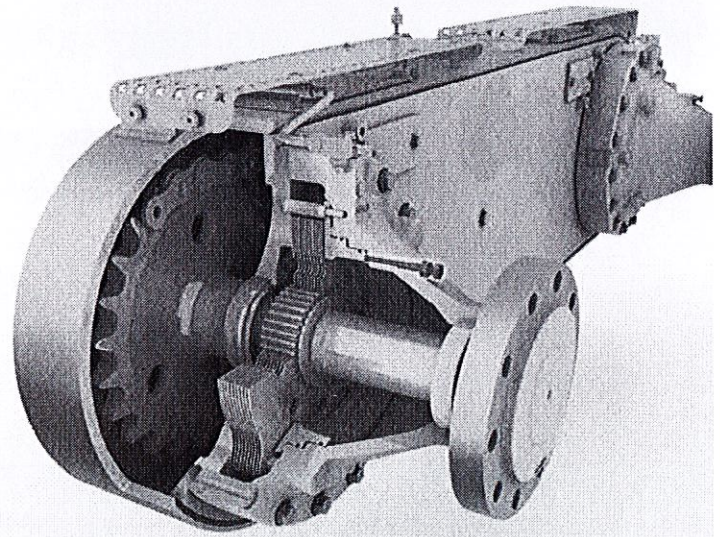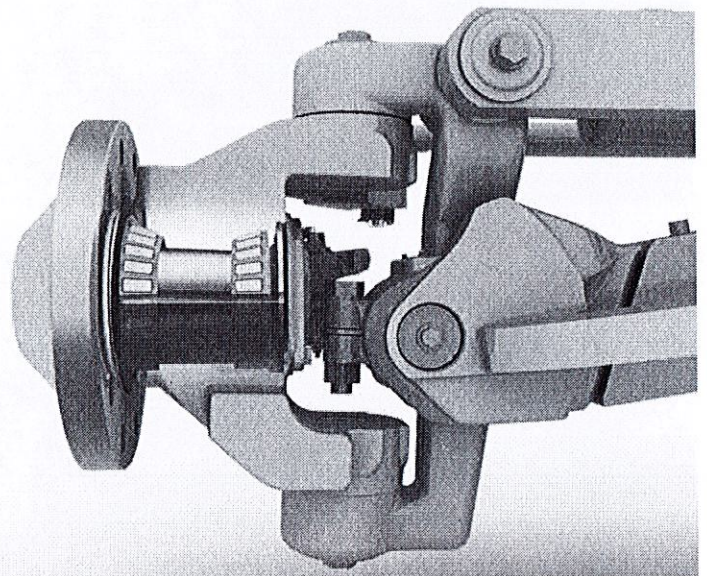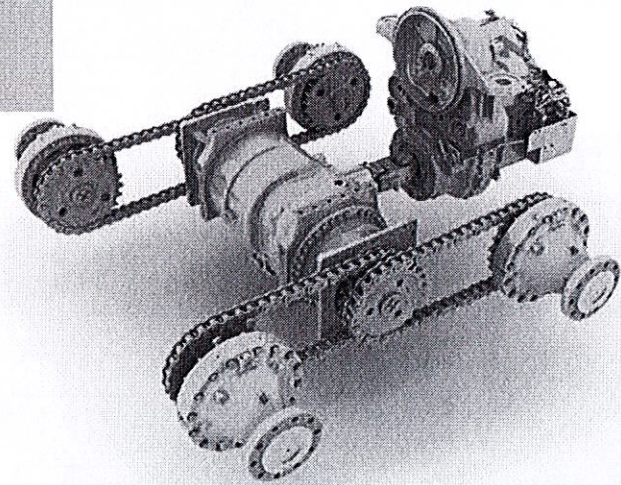



# Structures and Drawbar-Circle-Moldboard

Service ease and precise blade control

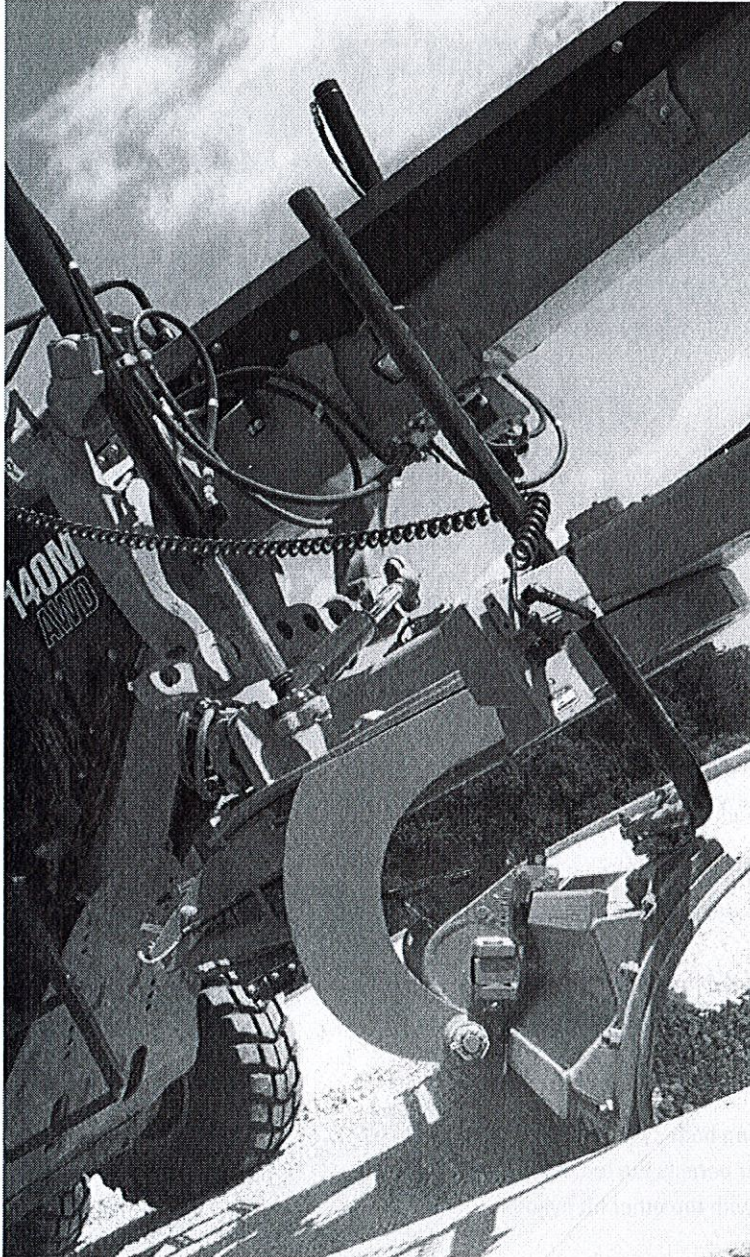

Caterpillar designs motor grader frame and drawbar components to give you performance and durability. The one-piece forged steel circle stands up to high stress loads, and a sacrificial wear system helps keep your service time and costs down.

The articulation hitch features a large tapered roller bearing to carry loads evenly and smoothly. It is sealed to prevent contamination and a locking pin prevents articulation for safety during service or transport.


## Easy Maintenance for More Uptime

The drawbar, circle and moldboard are designed to make it easy to keep the components tight. One person can easily adjust or replace the patented top-adjust drawbar wear inserts from the top of the drawbar plate, reducing downtime to save you money. Durable nylon composite wear inserts maximize circle torque and component life. Sacrificial brass wears strips between the blade mounting group and moldboard can be easily adjusted and replaced. The Shimless Moldboard Retention System uses vertical and horizontal adjusting screws to keep moldboard wear strips aligned for reduced blade chatter and precise blade control.

## Blade Angle and Moldboard

An aggressive blade angle, optimized moldboard curvature and large throat clearance help you work more efficiently by allowing material to roll more freely along the blade.


Heat-treated rails, hardened cutting edges and end bits, and heavy duty bolts to give you greater moldboard reliability and long service life. The link bar allows extreme moldboard positioning for easier bank sloping and ditch cutting/cleaning.

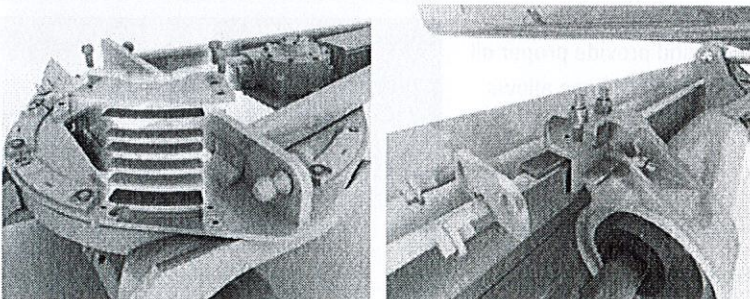



# Hydraulics

## Advanced machine control

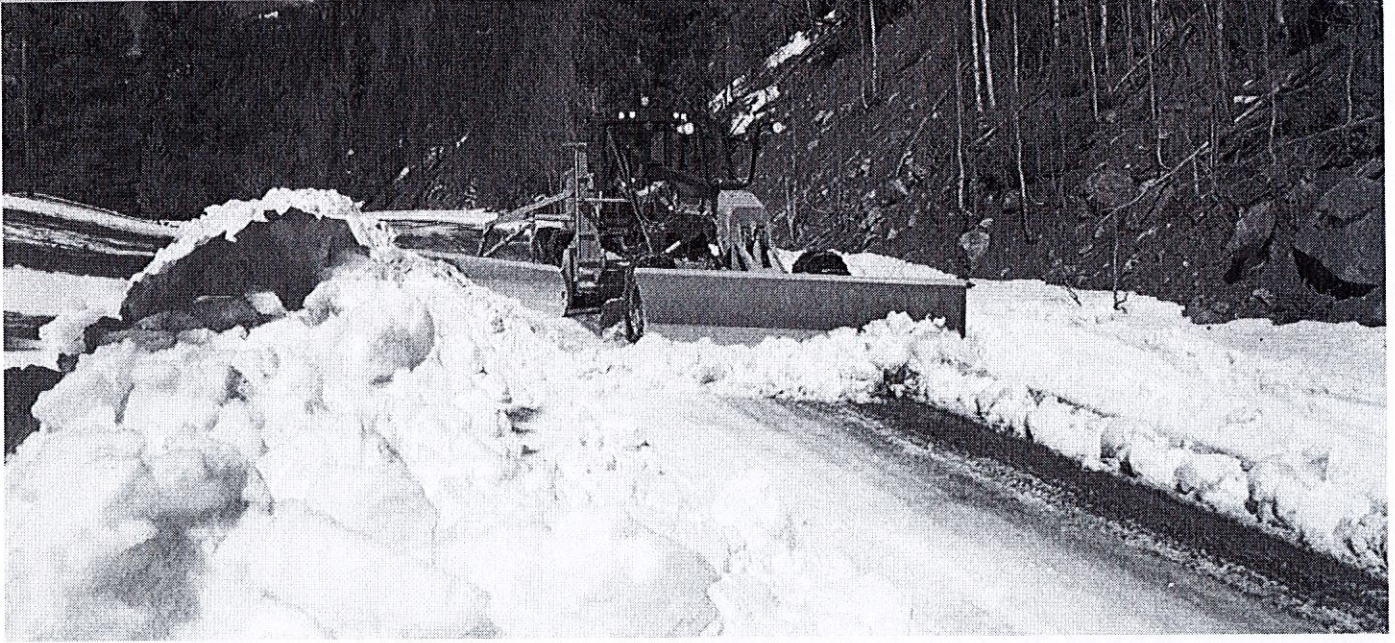

### Responsive Hydraulics

A proven load-sensing system and advanced electro-hydraulics give you superior implement control and responsive hydraulic performance that helps make your operator's job easier. Continuously matching hydraulic flow/pressure to power demands creates less heat and reduces power consumption.



- Consistent, Predictable Movement – Proportional Priority Pressure-Compensating (PPP-C) valves have different flow rates for the head and rod ends of the cylinder, so you can count on consistent, predictable implement response.
- Balanced Flow – Hydraulic flow is proportioned to give you confidence that all implements will operate simultaneously without slowing the engine or speed of some implements.

### Blade Float

Allows the blade to move freely under its own weight. By floating both cylinders, the blade can follow the contours of the ground. Floating only one cylinder permits the toe of the blade to follow a hard surface while the operator controls the slope with the other lift cylinder.

### Independent Oil Supply

Large, separate hydraulic oil supplies prevent cross-contamination and provide proper oil cooling, which reduces heat build-up and extends component life. Cat XT™ hose allows high pressures for maximum power and reduced downtime.

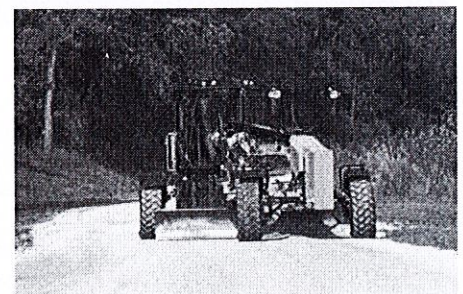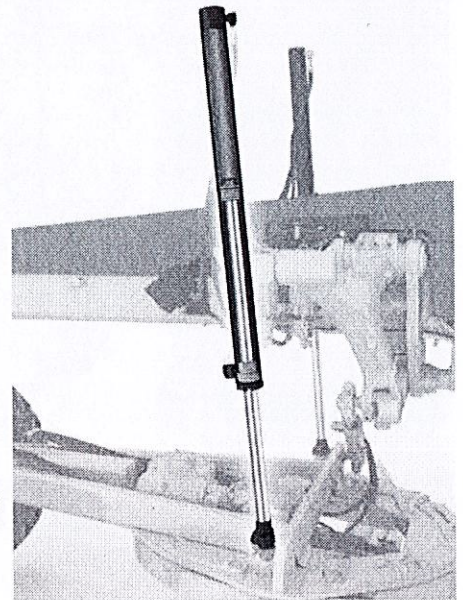




# All Wheel Drive (AWD)

Expanded machine versatility



■ Without Steering Compensation    ■ With Steering Compensation

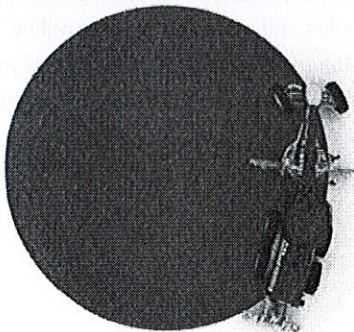

If you work in soft underfoot conditions where traction can be a challenge, optional All Wheel Drive (AWD) can give you the additional power to the ground you need to work more efficiently in mud, gravel, sand or snow. The added traction helps reduce sliding on side slopes.

- Dedicated left and right pumps give you more precise hydraulic control. The infinitely variable pumps and motors maximize torque in each gear.
- AWD automatically increases horsepower to maximize your power to the ground.
- Standard Hydrostatic Mode disengages the transmission and provides hydraulic power to the front wheels only. Infinitely variable ground speed between 0-8 km/h (0-5 mph) is ideal for precise finish work.
- Cat Steering Compensation System enables a "powered turn" by adjusting the outside front tire speed up to 50% faster than the inside tire. This gives you improved control, reduces surface damage and greatly reduces turning radius in poor underfoot conditions.



# Integrated Technologies

Monitor, manage, and enhance job site operations



Cat Connect makes smart use of technology and services to improve your job site efficiency. Using the data from technology-equipped machines, you'll get more information and insight into your equipment and operations than ever before.

Cat Connect technologies offer improvements in these key areas:



**Equipment Management** – increase uptime and reduce operating costs.



**Productivity** – monitor production and manage job site efficiency



**Safety** – enhance job site awareness to keep your people and equipment safe.

Featured Cat Connect technologies include:


## Link

Link technologies provide wireless capability to machines enabling two-way transfer of information collected by on-board sensors, control modules, and other Cat Connect technologies using off-board apps, such as our VisionLink software.

## Product Link™/VisionLink®

Product Link takes the guesswork out of equipment management. Track location, hours, fuel usage, productivity, idle time, diagnostic codes and more through the online VisionLink interface. Manage your fleet in real time so you can maximize efficiency, improve productivity, and lower operating costs.



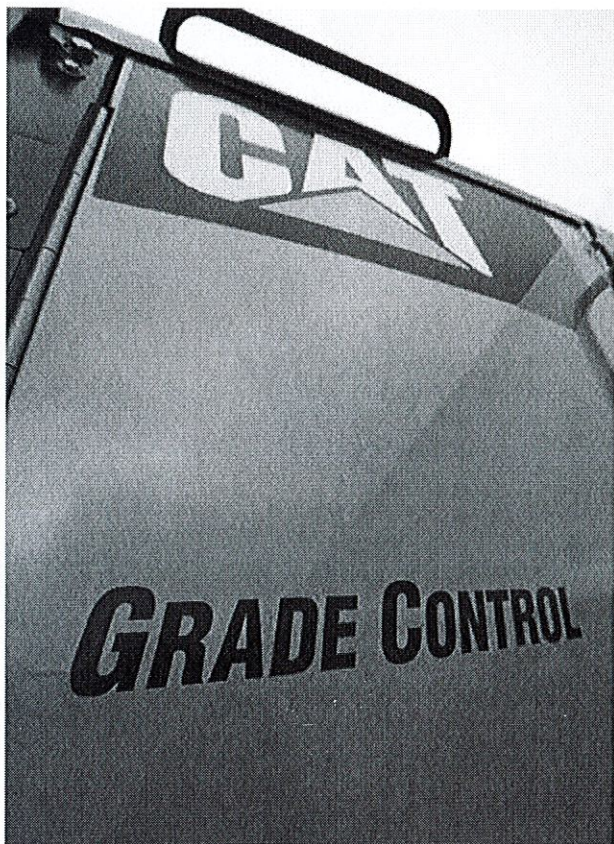

## Grade

Grade technologies combine digital design data, in-cab guidance, and automatic blade controls to enhance grading accuracy, reduce rework, and lower costs related to production earthmoving and rough, fine and finish grade applications.


## Cat Grade Control Cross Slope

Cat Grade Control Cross Slope is an optional fully integrated, factory installed system that helps your operator improve grading efficiency and more easily maintain accurate cross slopes. The system automatically controls one side of the blade, reducing manual operator inputs by as much as 50 percent. Experienced operators can maintain peak efficiency levels throughout more of the work day, while less experienced operators can be more productive faster. The system is job-ready from day one, and scalable for the future with AccuGrade™ upgrade kits that provide additional 2D and/or 3D control.



## Cat AccuGrade

AccuGrade is an optional dealer-installed grade control system that provides higher accuracy capabilities to the Cat Cross Slope system by adding Sonic, Laser, GPS, and/or Universal Total Station (UTS) technology when the job requires. In-cab guidance helps operators work more confidently and get to grade faster, in fewer passes, using less material, improving productivity and accuracy by nearly 50 percent over conventional methods. Grade stakes and checkers are minimized, making the job site safer and more cost effective. An AccuGrade Attachment Ready Option can be ordered as a factory or dealer-installed option. It includes built-in mounting points and internal wiring for easy installation of the AccuGrade system.

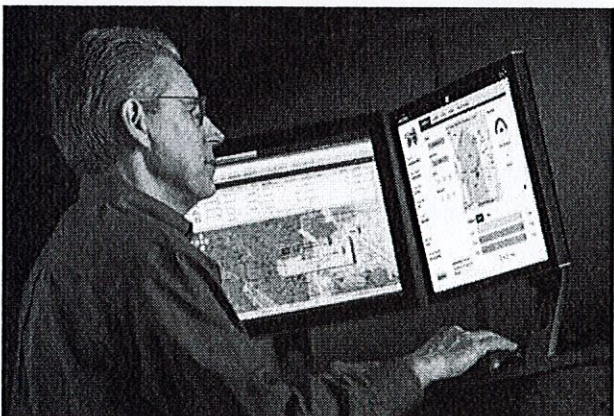

## CAT CONNECT



EQUIPMENT  
MANAGEMENT



PRODUCTIVITY



SAFETY






ATTACHMENT  
READY



# Safety

Designed with protection in mind

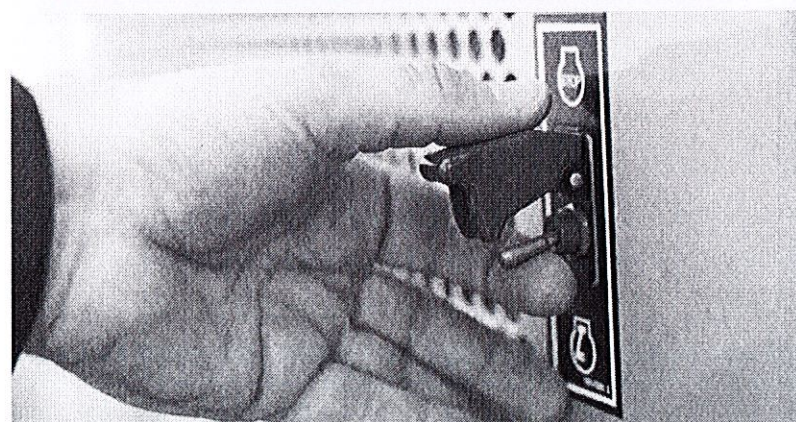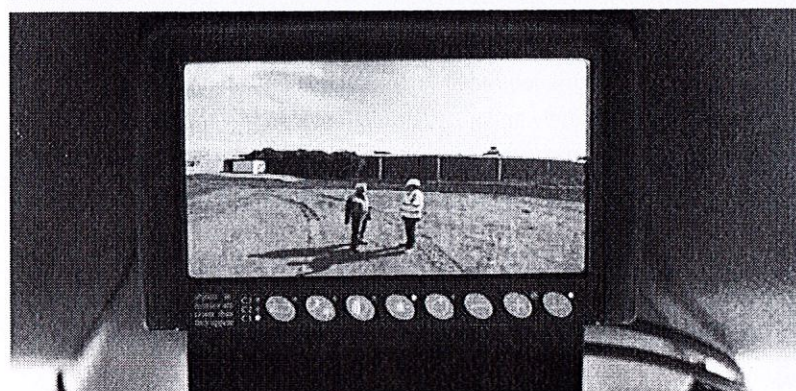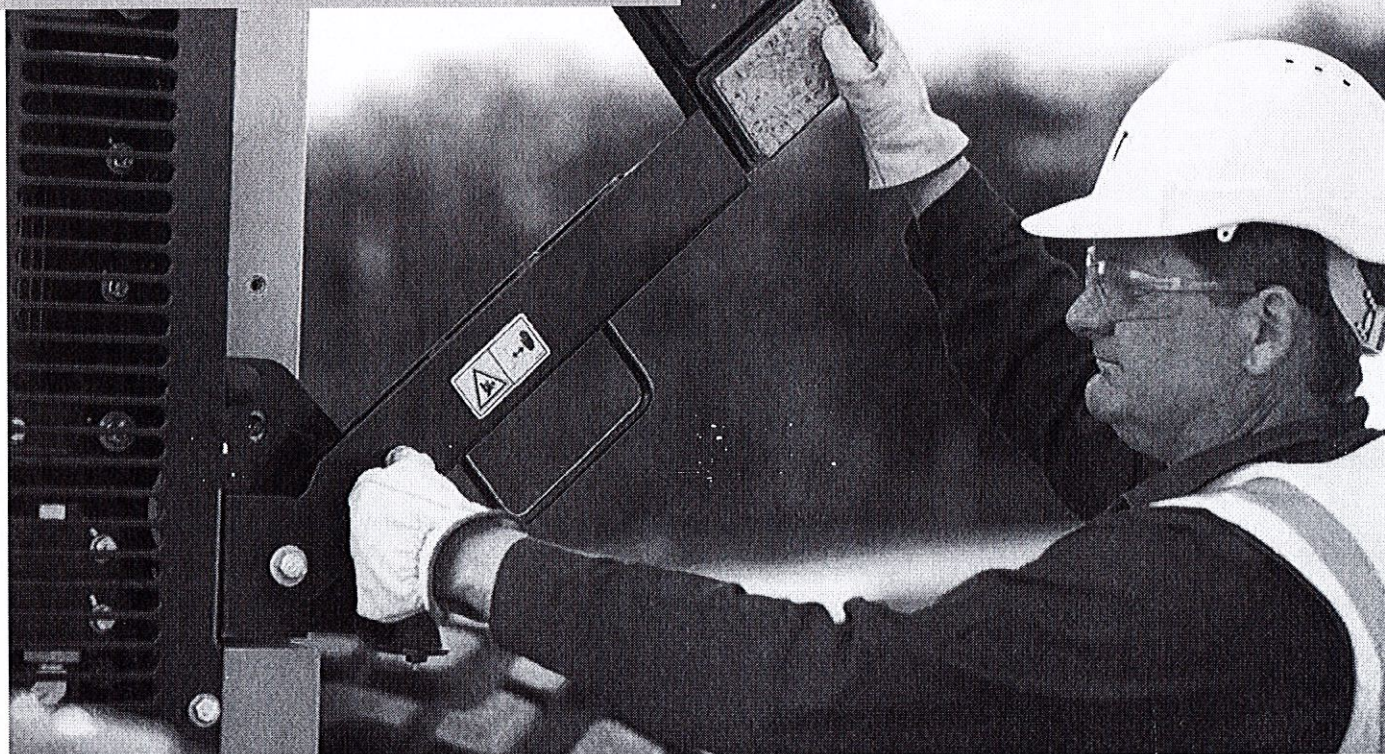

## M Series 3 Safety Features

- Optional rearview camera with in-cab monitor
- New optional seat belt indicator light reminds operator to fasten safety belt
- Grouped, ground level service points
- Laminated front window glass
- Optional LED Lighting
- Ground-level electrical disconnect switch
- Ground-level engine shutoff switch
- Anti-glare paint eases night operation
- Optional front and rear fenders



### **Operator Presence Monitoring System**

Standard system keeps the parking brake engaged and hydraulic implements disabled until the operator is seated and the machine is ready for operation.

### **Speed Sensitive Steering**

Standard function makes steering less sensitive as ground speed increases for greater operator confidence and control.

### **Secondary Steering System**

Standard feature automatically engages an electric hydraulic pump in case of a drop in steering pressure so the operator can steer the machine to a stop.

### **Hydraulic Lockout**

Disables all implement functions while still providing machine steering control. This standard safety feature is especially useful while loading.

### **Brake Systems**

Brakes are located at each tandem wheel to eliminate braking loads on the power train. Redundant brake systems utilize accumulators to enable stopping in case of machine failure.

### **Walkways and Grab Rails**


Perforated steel tandem walkways and convenient grab rails give you a sturdy platform when moving on, off and around the machine.

### **Circle Drive Slip Clutch**

Protects the drawbar, circle and moldboard from shock loads when the blade encounters an immovable object. This standard feature also reduces the possibility of abrupt directional changes in poor traction conditions.

### **Blade Lift Accumulators**


Help absorb impact loads to the moldboard by allowing vertical blade travel. This optional feature helps reduce wear and aids operator safety.

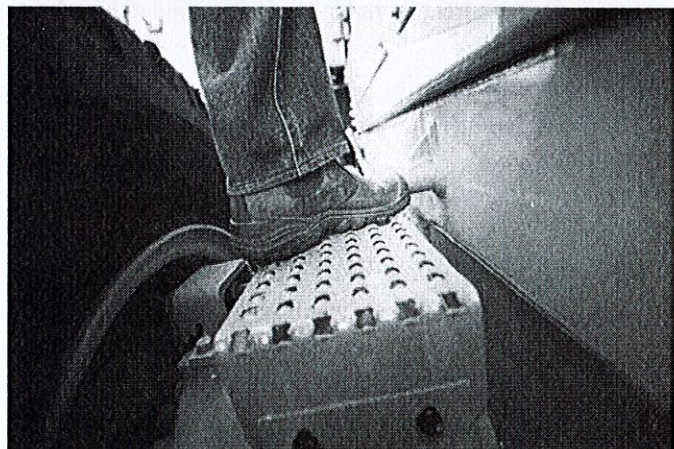



# Work Tools and Attachments

Equip your machine for the job

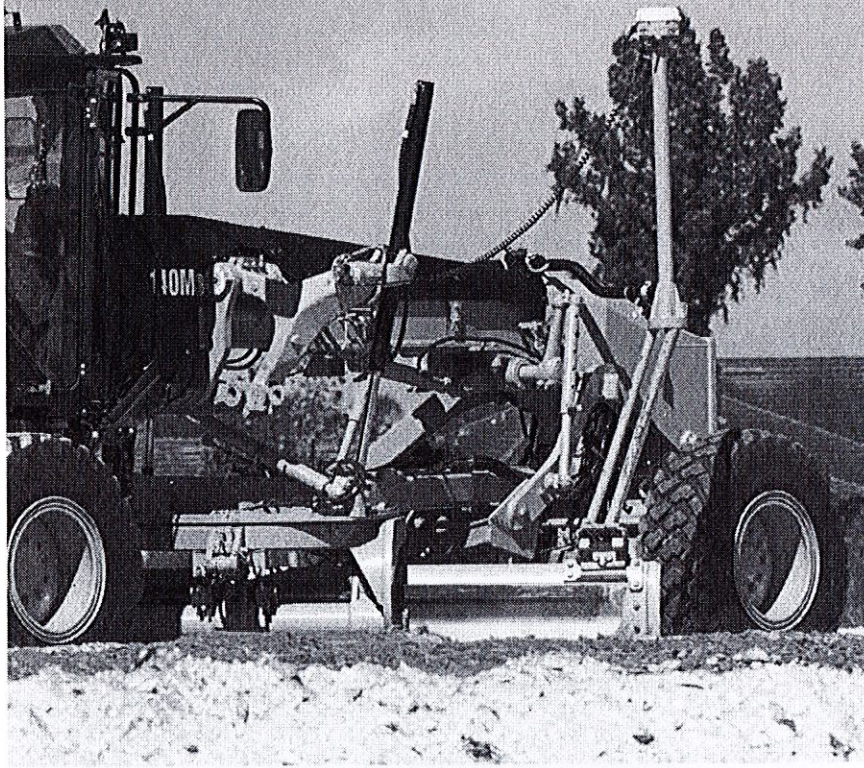

## Moldboard Options

The 12M3, 140M3 and 160M3 motor graders come equipped with a 3.7 m (12 ft) moldboard. An optional 4.3 m (14 ft) blade is available for all models, as well as a 4.9 m (16 ft) moldboard for the 160M3.

## Ground Engaging Tools (GET)

A variety of tools are available from Cat Work Tools, including cutting edges, graderbits and end bits, all designed for maximum service life and productivity.

## Front Mounted Groups



A front mounted push plate or front lift group are available. The front lift group can be combined with a front dozer blade or front scarifier for added versatility.

## Rear Ripper/Scarifier

Made to penetrate tough material fast and rip thoroughly for easier movement with the moldboard. The ripper includes three shanks (with holders for five). Nine scarifier shanks can also be added for additional versatility.

## Snow Removal Work Tools

Snow plow, snow wing and mounting options increase machine versatility and utilization throughout the year.

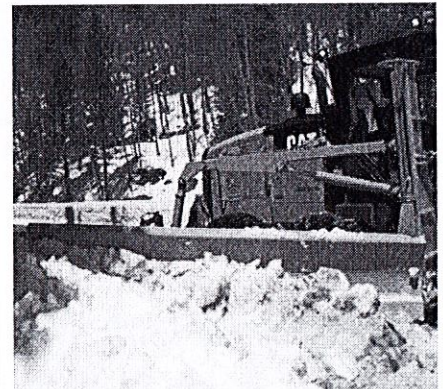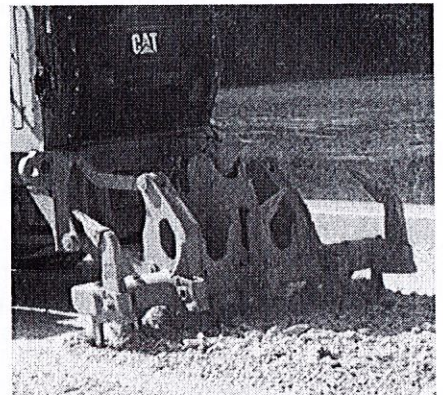



# Smart Machine Systems

## Advanced Diagnostics

- Cat Messenger, combined with full systems integration, enhances diagnostic capability for quick analysis of critical data.
- Electronic Technician (Cat ET) lets service technicians access stored diagnostic data and configure machine parameters through the Cat Data Link.
- Low Battery Elevated Idle raises idle speed when low system voltage is detected, ensuring adequate system voltage and improving battery reliability.
- Automatic Engine Deration protects the engine by automatically lowering engine torque output and alerting the operator if critical conditions are detected.



## Serviceability and Customer Support

When uptime counts

Cat motor graders are designed to help you increase uptime and reduce costs. Grouped service points and extended service intervals save maintenance time. New optional LED lights in the left hand compartment makes it more convenient to service the machine in low light.

### Unparalleled Dealer Support

When it comes to supporting you, Cat dealers are second to none. From machine selection and purchase to maintenance support and rebuilds, Cat dealers have the experience and capabilities to help keep you up and running.





# Sustainability

Thinking generations ahead



## Fuel Efficiency

- Integrated machine systems and technologies improve productivity for greater accuracy, allowing the machine to do more work per gallon of fuel.
- New Economy Mode feature allows the machine to work in the most efficient engine speed range to help reduce fuel use.

## Green House Gas Emissions

- Reduced fuel consumption means reduced CO<sub>2</sub> emissions.
- M Series 3 Motor Graders meet U.S. EPA Tier 4 Final/EU Stage IV emission standards.

## Material Efficiency and Lifecycle Costs

- Replaceable wear parts save maintenance time and cost, and extend major component life.
- Major components are built to be rebuilt, eliminating waste and saving customers money by giving the machine and/or major components a second – and even third – life.
- Approximately 95% of machine materials can be recycled (ISO 16714) to conserve valuable natural resources and further enhance machine end-of-life value.

## Sound

- Reduced engine noise and quieter cabs mean lower operator and spectator sound levels.

## Safety

- Ecology drains help make draining fluids more convenient and help prevent spills.
- Cartridge style hydraulic fluid filters provide safe clean draining of filters prior to replacement, helping to prevent fluid spills.
- A variety of safety features help safeguard operators and others on the job site.



# 12M3/12M3 AWD Motor Graders Specifications

## Engine

Engine Model	Cat C9.3 ACERT		
Emissions	U.S. EPA Tier 4 Final/ EU Stage IV		
Base Power (1st gear) – Net	133 kW	179 hp	
Base Power (1st gear) – Net (Metric)			181 hp
VHP Plus Range – Net	133-172 kW	179-231 hp	
VHP Plus Range – Net (Metric)			181-234 hp
AWD Range – Net	141-188 kW	189-252 hp	
AWD Range – Net (Metric)			192-255 hp
Displacement	9.3 L	567.5 in³	
Bore	115 mm	4.5 in	
Stroke	149 mm	5.9 in	
Torque Rise	38%		
Maximum Torque (VHP Plus)	1138 N·m	840 lb-ft	
Maximum Torque (AWD On)	1247 N·m	920 lb-ft	
Speed @ Rated Power	2,000 rpm		
Number of Cylinders	6		
Derating Altitude	3050 m	10,000 ft	
High Ambient – Fan Speed			
Standard	1,400 rpm		
Maximum	1,550 rpm		
Minimum	500 rpm		
Standard Capability	43° C	109° F	
High Ambient Capability	50° C	122° F	
Gear – Net Power	VHP Plus kW (hp)	AWD Off kW (hp)	AWD On kW (hp)
Forward			
1st	133 (179)	141 (189)	149 (200)
2nd	141 (189)	149 (200)	164 (220)
3rd	149 (200)	156 (210)	168 (225)
4th	156 (210)	160 (215)	172 (231)
5th	160 (215)	164 (220)	188 (252)
6th	164 (220)	168 (225)	188 (252)
7th	168 (225)	172 (231)	188 (252)
8th	172 (231)	172 (231)	188 (252)
Reverse			
1st	133 (179)	133 (179)	133 (179)
2nd	141 (189)	141 (189)	141 (189)
3rd–6th	149 (200)	149 (200)	149 (200)

## Engine (cont'd)

- Net power is tested per ISO 9249, SAE J1349, and EEC 80/1269 Standards in effect at the time of manufacture.
- VHP Plus is standard for the 12M3 and 12M3 AWD.
- Net power advertised is the power available at rated speed of 2,000 rpm, measured at the flywheel when engine is equipped with fan running at minimum speed, air cleaner, muffler and alternator.
- No engine derating required up to 3050 m (10,000 ft).
- Power as declared per ISO 14396  
Rated rpm 2,000  
VHP+ = 173 kW (232 hp)  
AWD = 189 kW (253 hp)
- All nonroad U.S. EPA Tier 4, European Union (EU) Stage IIIB and IV, and Japan (MLIT) Step 4 diesel engines are required to use only Ultra Low Sulfur Diesel (ULSD) fuels containing 15 ppm (mg/kg) sulfur or less. Biodiesel blends up to B20 (20% blend by volume) are acceptable when blended with 15 ppm (mg/kg) sulfur or less ULSD. B20 should meet ASTM D7467 specification (biodiesel blend stock should meet Cat biodiesel spec, ASTM D6751 or EN 14214). Cat DEO-ULS™ or oils that meet the Cat ECF-3, API CJ-4, and ACEA E9 specification are required. Consult your OMM for further machine specific fuel recommendations.
- Cat engines equipped with a Selective Catalytic Reduction (SCR) system are required to use:
  - Diesel Exhaust Fluid (DEF) which meets the requirements outlined in the International Organization for Standardization (ISO) standard 22241-1.

## Power Train

Forward/Reverse Gears	8 Forward/6 Reverse
Transmission	APECS, Direct Drive, Powershift
Brakes	
Service	Multiple Oil Disc
Service, Surface Area	23 000 cm <sup>2</sup> 3,565 in <sup>2</sup>
Parking	Multiple Oil Disc
Secondary	Dual Circuit

## Hydraulic System

Circuit Type	Parallel
Pump Type	Variable Piston
Pump Output	210 L/min 55.7 gal/min
Maximum System Pressure	24 150 kPa 3,500 psi
Reservoir Tank Capacity	64.0 L 16.9 gal
Standby Pressure	6100 kPa 885 psi

- Pump output measured at 2,150 rpm.



# 12M3/12M3 AWD Motor Graders Specifications

## Operating Specifications

Top Speed		
Forward	46.6 km/h	29.0 mph
Reverse	36.8 km/h	23.0 mph
Turning Radius, Outside Front Tires	7.8 m	25 ft 7 in
Steering Range – Left/Right	50°	
Articulation Angle – Left/Right	20°	
Forward		
1st	4.1 km/h	2.5 mph
2nd	5.5 km/h	3.4 mph
3rd	8.0 km/h	5.0 mph
4th	11.0 km/h	6.9 mph
5th	17.1 km/h	10.6 mph
6th	23.3 km/h	14.5 mph
7th	32.0 km/h	19.9 mph
8th	46.6 km/h	29.0 mph
Reverse		
1st	3.2 km/h	2.0 mph
2nd	6.0 km/h	3.7 mph
3rd	8.7 km/h	5.4 mph
4th	13.5 km/h	8.4 mph
5th	25.3 km/h	15.7 mph
6th	36.8 km/h	23.0 mph

• Calculated with no slip and 14.0R24 tires.

## Service Refill

Fuel Capacity	394 L	104 gal
Cooling System	57.0 L	15.0 gal
Hydraulic System		
Total	100 L	26.4 gal
Tank	64.0 L	16.9 gal
Engine Oil	30.0 L	7.9 gal
Trans./Diff./Final Drives	70.0 L	18.5 gal
Tandem Housing (Each)	76.0 L	20.0 gal
Front Wheel Spindle Bearing Housing	0.5 L	0.13 gal
Circle Drive Housing	7.0 L	1.8 gal
Diesel Exhaust Fluid	22.0 L	5.8 gal

## Frame

Circle		
Diameter	1530 mm	60.2 in
Height	138 mm	5.4 in
Blade Beam Thickness	40.0 mm	1.6 in
Drawbar		
Height	152 mm	6.0 in
Width	76.2 mm	3.0 in
Thickness	12.7 mm	0.50 in
Front-Top/Bottom Plate		
Width	305 mm	12.0 in
Thickness	22.0 mm	0.87 in
Front Frame Structure		
Height	321 mm	12.6 in
Width	305 mm	12.0 in
Front Axle		
Height to Center	596 mm	23.5 in
Wheel Lean, Left/Right	18°	
Total Oscillation per Side	32°	

• Front-top/bottom plate – width tolerance  $\pm 2.5$  mm (0.098 in).

## Tandems

Height	506 mm	19.9 in
Width	201 mm	7.9 in
Sidewall Thickness		
Inner	16.0 mm	0.63 in
Outer	18.0 mm	0.71 in
Drive Chain Pitch	50.8 mm	2.0 in
Wheel Axle Spacing	1523 mm	60.0 in
Tandem Oscillation		
Front Up	15°	
Front Down	25°	



# 12M3/12M3 AWD Motor Graders Specifications

## Moldboard

Blade Width	3.7 m	12 ft
Moldboard		
Height	610 mm	24.0 in
Thickness	22.0 mm	0.87 in
Arc Radius	413 mm	16.3 in
Throat Clearance	166 mm	6.5 in
Cutting Edge		
Width	152 mm	6.0 in
Thickness	16.0 mm	0.60 in
End Bit		
Width	152 mm	6.0 in
Thickness	16.0 mm	0.60 in
Blade Pull		
Base GVW	11 462 kg	25,269 lb
Maximum GVW	15 541 kg	34,262 lb
Base GVW (AWD)	16 170 kg	35,649 lb
Maximum GVW (AWD)	22 512 kg	49,630 lb
Blade Down Pressure		
Base GVW	7275 kg	16,038 lb
Maximum GVW	13 294 kg	29,309 lb
Base GVW (AWD)	8151 kg	17,970 lb
Maximum GVW (AWD)	13 294 kg	29,309 lb

## Blade Range

Circle Centershift		
Right	728 mm	28.7 in
Left	695 mm	27.4 in
Moldboard Sideshift		
Right	660 mm	26.0 in
Left	510 mm	20.1 in
Maximum Blade Position Angle	90°	
Blade Tip Range		
Forward	40°	
Backward	5°	
Maximum Shoulder Reach Outside of Tires		
Right	1978 mm	77.9 in
Left	1790 mm	70.5 in
Maximum Lift Above Ground	480 mm	18.9 in
Maximum Depth of Cut	715 mm	28.1 in

## Ripper

Ripping Depth, Maximum	426 mm	16.8 in
Ripper Shank Holders	5	
Ripper Shank Holder Spacing	533 mm	21.0 in
Penetration Force	9440 kg	20,812 lb
Pryout Force	12 607 kg	27,794 lb
Machine Length Increase, Beam Raised	1031 mm	40.6 in

## Scarifier

Front, V-Type: Working Width	1205 mm	47.4 in
Front, V-Type, 5 or 11 Tooth		
Working Width	1031 mm	40.6 in
Scarifying Depth, Maximum	467 mm	18.4 in
Scarifier Shank Holders	5/11	
Scarifier Shank Holder Spacing	116 mm	4.6 in
Mid, V-Type		
Working Width	1184 mm	46.6 in
Scarifying Depth, Maximum	292 mm	11.5 in
Scarifier Shank Holders	11	
Scarifier Shank Holder Spacing	116 mm	4.6 in
Rear		
Working Width	2133 mm	84.0 in
Scarifying Depth, Maximum	426 mm	16.8 in
Scarifier Shank Holders	9	
Scarifier Shank Holder Spacing	267 mm	10.5 in

## Weights

Gross Vehicle Weight, Base		
Total	16 974 kg	37,420 lb
Front Axle	4238 kg	9,343 lb
Rear Axle	12 736 kg	28,077 lb
Gross Vehicle Weight, Maximum		
Total	25 013 kg	55,144 lb
Front Axle	7745 kg	17,075 lb
Rear Axle	17 268 kg	38,069 lb
Operating Weight, Typically Equipped		
Total	19 344 kg	42,647 lb
Front Axle	5468 kg	12,055 lb
Rear Axle	13 876 kg	30,592 lb



# 12M3/12M3 AWD Motor Graders Specifications

## Weights – AWD

### Gross Vehicle Weight, Base

Total	17 966 kg	39,609 lb
Front Axle	4749 kg	10,469 lb
Rear Axle	13 217 kg	29,140 lb

### Gross Vehicle Weight, Maximum

Total	25 013 kg	55,144 lb
Front Axle	7745 kg	17,075 lb
Rear Axle	17 268 kg	38,069 lb

### Operating Weight, Typically Equipped

Total	20 236 kg	44,614 lb
Front Axle	5945 kg	13,107 lb
Rear Axle	14 291 kg	31,507 lb

- Base operating weight on standard machine configuration is calculated with full fuel tank, coolant, lubricants, operator and 14.0R24 tires with single-piece (SP) rims.
- Typically equipped operating weight is calculated with push block, rear ripper/scarifier, 14.0R24 tires with single-piece (SP) rims, and other equipment.

## Standards

ROPS/FOPS	ISO 3471/ISO 3499
Steering	ISO 5010
Brakes	ISO 3450
Sound	ISO 6394; ISO 6395

- The declared dynamic operator sound pressure level is 71 dB(A) for the 12M Series 3 and 12M Series 3 AWD when “ISO 6396:2008” is used to measure the value for a European Union “CE” marked machine. The measurement was conducted at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds.
- The declared exterior sound power level is 107 dB(A) for the 12M Series 3 and 12M Series 3 AWD when the value is measured according to the dynamic test procedures and the conditions that are specified in “ISO 6395:2008.” The measurement was conducted for a European Union “CE” marked machine at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds and during diesel particulate filter regeneration.



# 140M3/140M3 AWD Motor Graders Specifications

## Engine

Engine Model	Cat C9.3 ACERT		
Emissions	U.S. EPA Tier 4 Final/ EU Stage IV		
Base Power (1st gear) – Net	149 kW	200 hp	
Base Power (1st gear) – Net (Metric)		202 hp	
VHP Plus Range – Net	149-188 kW	200-252 hp	
VHP Plus Range – Net (Metric)		202-255 hp	
AWD Range – Net	156-203 kW	210-272 hp	
AWD Range – Net (Metric)		213-276 hp	
Displacement	9.3 L	567.5 in³	
Bore	115 mm	4.5 in	
Stroke	149 mm	5.9 in	
Torque Rise	39%		
Maximum Torque (VHP Plus)	1247 N·m	920 lb-ft	
Maximum Torque (AWD On)	1355 N·m	1,000 lb-ft	
Speed @ Rated Power	2,000 rpm		
Number of Cylinders	6		
Derating Altitude	3050 m	10,000 ft	
High Ambient – Fan Speed			
Standard	1,400 rpm		
Maximum	1,550 rpm		
Minimum	500 rpm		
Standard Capability	43° C	109° F	
High Ambient Capability	50° C	122° F	
Gear – Net Power	VHP Plus kW (hp)	AWD Off kW (hp)	AWD On kW (hp)
Forward			
1st	149 (200)	156 (210)	164 (220)
2nd	156 (210)	164 (220)	180 (241)
3rd	164 (220)	172 (231)	184 (247)
4th	172 (231)	176 (236)	188 (252)
5th	176 (236)	180 (241)	203 (272)
6th	180 (241)	184 (247)	203 (272)
7th	184 (247)	188 (252)	203 (272)
8th	188 (252)	188 (252)	203 (272)
Reverse			
1st	149 (200)	149 (200)	149 (200)
2nd	156 (210)	156 (210)	156 (210)
3rd–6th	164 (220)	164 (220)	164 (220)

## Engine (cont'd)

- Net power is tested per ISO 9249, SAE J1349, and EEC 80/1269 Standards in effect at the time of manufacture.
- VHP Plus is standard for the 140M3 and 140M3 AWD.
- Net power advertised is the power available at rated speed of 2,000 rpm, measured at the flywheel when engine is equipped with fan running at minimum speed, air cleaner, muffler and alternator.
- No engine derating required up to 3050 m (10,000 ft).
- Power as declared per ISO 14396  
Rated rpm 2,000  
VHP+ = 189 kW (253 hp)  
AWD = 204 kW (274 hp)
- All nonroad U.S. EPA Tier 4, European Union (EU) Stage IIIB and IV, and Japan (MLIT) Step 4 diesel engines are required to use only Ultra Low Sulfur Diesel (ULSD) fuels containing 15 ppm (mg/kg) sulfur or less. Biodiesel blends up to B20 (20% blend by volume) are acceptable when blended with 15 ppm (mg/kg) sulfur or less ULSD. B20 should meet ASTM D7467 specification (biodiesel blend stock should meet Cat biodiesel spec, ASTM D6751 or EN 14214). Cat DEO-ULS or oils that meet the Cat ECF-3, API CJ-4, and ACEA E9 specification are required. Consult your OMM for further machine specific fuel recommendations.
- Cat engines equipped with a Selective Catalytic Reduction (SCR) system are required to use:
  - Diesel Exhaust Fluid (DEF) which meets the requirements outlined in the International Organization for Standardization (ISO) standard 22241-1.

## Power Train

Forward/Reverse Gears	8 Forward/6 Reverse	
Transmission	APECS, Direct Drive, Powershift	
Brakes		
Service	Multiple Oil Disc	
Service, Surface Area	23 000 cm <sup>2</sup>	3,565 in <sup>2</sup>
Parking	Multiple Oil Disc	
Secondary	Dual Circuit	

## Hydraulic System

Circuit Type	Parallel	
Pump Type	Variable Piston	
Pump Output	210 L/min	55.7 gal/min
Maximum System Pressure	24 150 kPa	3,500 psi
Reservoir Tank Capacity	64.0 L	16.9 gal
Standby Pressure	6100 kPa	885 psi

- Pump output measured at 2,150 rpm.



# 140M3/140M3 AWD Motor Graders Specifications

## Operating Specifications

Top Speed		
Forward	46.6 km/h	29.0 mph
Reverse	36.8 km/h	23.0 mph
Turning Radius, Outside Front Tires	7.8 m	25 ft 7 in
Steering Range – Left/Right	50°	
Articulation Angle – Left/Right	20°	
Forward		
1st	4.1 km/h	2.5 mph
2nd	5.5 km/h	3.4 mph
3rd	8.0 km/h	5.0 mph
4th	11.0 km/h	6.9 mph
5th	17.1 km/h	10.6 mph
6th	23.3 km/h	14.5 mph
7th	32.0 km/h	19.9 mph
8th	46.6 km/h	29.0 mph
Reverse		
1st	3.2 km/h	2.0 mph
2nd	6.0 km/h	3.7 mph
3rd	8.7 km/h	5.4 mph
4th	13.5 km/h	8.4 mph
5th	25.3 km/h	15.7 mph
6th	36.8 km/h	23.0 mph

• Calculated with no slip and 14.0R24 tires.

## Service Refill

Fuel Capacity	394 L	104 gal
Cooling System	57.0 L	15.0 gal
Hydraulic System		
Total	100 L	26.4 gal
Tank	64.0 L	16.9 gal
Engine Oil	30.0 L	7.9 gal
Trans./Diff./Final Drives	70.0 L	18.5 gal
Tandem Housing (Each)	76.0 L	20.0 gal
Front Wheel Spindle Bearing Housing	0.5 L	0.13 gal
Circle Drive Housing	7.0 L	1.8 gal
Diesel Exhaust Fluid	22.0 L	5.8 gal

## Frame

Circle		
Diameter	1530 mm	60.2 in
Height	138 mm	5.4 in
Blade Beam Thickness	40.0 mm	1.6 in
Drawbar		
Height	152 mm	6.0 in
Width	76.2 mm	3.0 in
Thickness	12.7 mm	0.50 in
Front-Top/Bottom Plate		
Width	305 mm	12.0 in
Thickness	22.0 mm	0.87 in
Front Frame Structure		
Height	321 mm	12.6 in
Width	305 mm	12.0 in
Front Axle		
Height to Center	596 mm	23.5 in
Wheel Lean, Left/Right	18°	
Total Oscillation per Side	32°	

• Front-top/bottom plate – width tolerance  $\pm 2.5$  mm (0.098 in).

## Tandems

Height	506 mm	19.9 in
Width	201 mm	7.9 in
Sidewall Thickness		
Inner	16.0 mm	0.63 in
Outer	18.0 mm	0.71 in
Drive Chain Pitch	50.8 mm	2.0 in
Wheel Axle Spacing	1523 mm	60.0 in
Tandem Oscillation		
Front Up	15°	
Front Down	25°	



# 140M3/140M3 AWD Motor Graders Specifications

## Moldboard

Blade Width	3.7 m	12 ft
Moldboard		
Height	610 mm	24.0 in
Thickness	22.0 mm	0.87 in
Arc Radius	413 mm	16.3 in
Throat Clearance	166 mm	6.5 in
Cutting Edge		
Width	152 mm	6.0 in
Thickness	16.0 mm	0.60 in
End Bit		
Width	152 mm	6.0 in
Thickness	16.0 mm	0.60 in
Blade Pull		
Base GVW	11 672 kg	25,732 lb
Maximum GVW	15 541 kg	34,262 lb
Base GVW (AWD)	16 484 kg	36,341 lb
Maximum GVW (AWD)	22 512 kg	49,630 lb
Blade Down Pressure		
Base GVW	7475 kg	16,480 lb
Maximum GVW	13 294 kg	29,308 lb
Base GVW (AWD)	8351 kg	18,411 lb
Maximum GVW (AWD)	13 294 kg	29,308 lb

## Blade Range

Circle Centershift		
Right	728 mm	28.7 in
Left	695 mm	27.4 in
Moldboard Sideshift		
Right	660 mm	26.0 in
Left	510 mm	20.1 in
Maximum Blade Position Angle	90°	
Blade Tip Range		
Forward	40°	
Backward	5°	
Maximum Shoulder Reach Outside of Tires		
Right	1978 mm	77.9 in
Left	1790 mm	70.5 in
Maximum Lift Above Ground	480 mm	18.9 in
Maximum Depth of Cut	715 mm	28.1 in

## Ripper

Ripping Depth, Maximum	426 mm	16.8 in
Ripper Shank Holders	5	
Ripper Shank Holder Spacing	533 mm	21.0 in
Penetration Force	9440 kg	20,812 lb
Pryout Force	12 607 kg	27,794 lb
Machine Length Increase, Beam Raised	1031 mm	40.6 in

## Scarifier

Front, V-Type: Working Width	1205 mm	47.4 in
Front, V-Type, 5 or 11 Tooth		
Working Width	1031 mm	40.6 in
Scarifying Depth, Maximum	467 mm	18.4 in
Scarifier Shank Holders	5/11	
Scarifier Shank Holder Spacing	116 mm	4.6 in
Mid, V-Type		
Working Width	1184 mm	46.6 in
Scarifying Depth, Maximum	292 mm	11.5 in
Scarifier Shank Holders	11	
Scarifier Shank Holder Spacing	116 mm	4.6 in
Rear		
Working Width	2133 mm	84.0 in
Scarifying Depth, Maximum	426 mm	16.8 in
Scarifier Shank Holders	9	
Scarifier Shank Holder Spacing	267 mm	10.5 in

## Weights

Gross Vehicle Weight, Base		
Total	17 323 kg	38,191 lb
Front Axle	4355 kg	9,601 lb
Rear Axle	12 968 kg	28,590 lb
Gross Vehicle Weight, Maximum		
Total	25 013 kg	55,144 lb
Front Axle	7745 kg	17,075 lb
Rear Axle	17 268 kg	38,069 lb
Operating Weight, Typically Equipped		
Total	19 935 kg	43,950 lb
Front Axle	5692 kg	12,549 lb
Rear Axle	14 243 kg	31,401 lb



# 140M3/140M3 AWD Motor Graders Specifications

## Weights – AWD

Gross Vehicle Weight, Base		
Total	18 316 kg	40,380 lb
Front Axle	4865 kg	10,726 lb
Rear Axle	13 451 kg	29,654 lb
Gross Vehicle Weight, Maximum		
Total	25 013 kg	55,144 lb
Front Axle	7745 kg	17,075 lb
Rear Axle	17 268 kg	38,069 lb
Operating Weight, Typically Equipped		
Total	20 827 kg	45,917 lb
Front Axle	6169 kg	13,601 lb
Rear Axle	14 658 kg	32,316 lb

- Base operating weight on standard machine configuration is calculated with full fuel tank, coolant, lubricants, operator and 14.0R24 tires with multi-piece (MP) rims.
- Typically equipped operating weight is calculated with push block, transmission guard, rear ripper/scarifier, 14.0R24 tires with multi-piece (MP) rims, and other equipment.

## Standards

ROPS/FOPS	ISO 3471/ISO 3499
Steering	ISO 5010
Brakes	ISO 3450
Sound	ISO 6394; ISO 6395

- The declared dynamic operator sound pressure level is 71 dB(A) for the 140M Series 3 and 140M Series 3 AWD when “ISO 6396:2008” is used to measure the value for a European Union “CE” marked machine. The measurement was conducted at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds.
- The declared exterior sound power level is 107 dB(A) for the 140M Series 3 and 140M Series 3 AWD when the value is measured according to the dynamic test procedures and the conditions that are specified in “ISO 6395:2008.” The measurement was conducted for a European Union “CE” marked machine at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds and during diesel particulate filter regeneration.



# 160M3/160M3 AWD Motor Graders Specifications

## Engine

Engine Model	Cat C9.3 ACERT		
Emissions	U.S. EPA Tier 4 Final/ EU Stage IV		
Base Power (1st gear) – Net	165 kW	221 hp	
Base Power (1st gear) – Net (Metric)		224 hp	
VHP Plus Range – Net	165-203 kW	221-272 hp	
VHP Plus Range – Net (Metric)		224-276 hp	
AWD Range – Net	172-219 kW	231-293 hp	
AWD Range – Net (Metric)		234-298 hp	
Displacement	9.3 L	567.5 in³	
Bore	115 mm	4.5 in	
Stroke	149 mm	5.9 in	
Torque Rise	39%		
Maximum Torque (VHP Plus)	1355 N·m	1,000 lb-ft	
Maximum Torque (AWD On)	1464 N·m	1,079 lb-ft	
Speed @ Rated Power	2,000 rpm		
Number of Cylinders	6		
Derating Altitude	3050 m	10,000 ft	
High Ambient – Fan Speed			
Standard	1,400 rpm		
Maximum	1,550 rpm		
Minimum	500 rpm		
Standard Capability	43° C	109° F	
High Ambient Capability	50° C	122° F	
Gear – Net Power	VHP Plus kW (hp)	AWD Off kW (hp)	AWD On kW (hp)
Forward			
1st	165 (221)	172 (231)	180 (241)
2nd	172 (231)	180 (241)	195 (262)
3rd	180 (241)	188 (252)	199 (267)
4th	188 (252)	191 (257)	203 (272)
5th	191 (257)	195 (262)	219 (293)
6th	195 (262)	199 (267)	219 (293)
7th	199 (267)	203 (272)	219 (293)
8th	203 (272)	203 (272)	219 (293)
Reverse			
1st	165 (221)	165 (221)	165 (221)
2nd	172 (231)	172 (231)	172 (231)
3rd–6th	180 (241)	180 (241)	180 (241)

## Engine (cont'd)

- Net power is tested per ISO 9249, SAE J1349, and EEC 80/1269 Standards in effect at the time of manufacture.
- VHP Plus is standard for the 160M3 and 160M3 AWD.
- Net power advertised is the power available at rated speed of 2,000 rpm, measured at the flywheel when engine is equipped with fan running at minimum speed, air cleaner, muffler and alternator.
- No engine derating required up to 3050 m (10,000 ft).
- Power as declared per ISO 14396  
Rated rpm 2,000  
VHP+ = 204 kW (274 hp)  
AWD = 220 kW (295 hp)
- All nonroad U.S. EPA Tier 4, European Union (EU) Stage IIIB and IV, and Japan (MLIT) Step 4 diesel engines are required to use only Ultra Low Sulfur Diesel (ULSD) fuels containing 15 ppm (mg/kg) sulfur or less. Biodiesel blends up to B20 (20% blend by volume) are acceptable when blended with 15 ppm (mg/kg) sulfur or less ULSD. B20 should meet ASTM D7467 specification (biodiesel blend stock should meet Cat biodiesel spec, ASTM D6751 or EN 14214). Cat DEO-ULS or oils that meet the Cat ECF-3, API CJ-4, and ACEA E9 specification are required. Consult your OMM for further machine specific fuel recommendations.
- Cat engines equipped with a Selective Catalytic Reduction (SCR) system are required to use:
  - Diesel Exhaust Fluid (DEF) which meets the requirements outlined in the International Organization for Standardization (ISO) standard 22241-1.

## Power Train

Forward/Reverse Gears	8 Forward/6 Reverse	
Transmission	APECS, Direct Drive, Powershift	
Brakes		
Service	Multiple Oil Disc	
Service, Surface Area	23 000 cm <sup>2</sup>	3,565 in <sup>2</sup>
Parking	Multiple Oil Disc	
Secondary	Dual Circuit Control	

## Hydraulic System

Circuit Type	Parallel	
Pump Type	Variable Piston	
Pump Output	210 L/min	55.5 gal/min
Maximum System Pressure	24 150 kPa	3,503 psi
Reservoir Tank Capacity	64.0 L	16.9 gal
Standby Pressure	6100 kPa	885 psi

- Pump output measured at 2,150 rpm.



# 160M3/160M3 AWD Motor Graders Specifications

## Operating Specifications

Top Speed		
Forward	47.4 km/h	29.5 mph
Reverse	37.4 km/h	23.3 mph
Turning Radius, Outside Front Tires	7.8 m	25 ft 7 in
Steering Range – Left/Right	50°	
Articulation Angle – Left/Right	20°	
Forward		
1st	4.1 km/h	2.6 mph
2nd	5.6 km/h	3.5 mph
3rd	8.1 km/h	5.1 mph
4th	11.2 km/h	7.0 mph
5th	17.4 km/h	10.8 mph
6th	23.7 km/h	14.7 mph
7th	32.6 km/h	20.3 mph
8th	47.4 km/h	29.5 mph
Reverse		
1st	3.3 km/h	2.0 mph
2nd	6.1 km/h	3.8 mph
3rd	8.8 km/h	5.5 mph
4th	13.7 km/h	8.5 mph
5th	25.7 km/h	16.0 mph
6th	37.4 km/h	23.3 mph

• Calculated with no slip and 14.0R24 tires.

## Service Refill

Fuel Capacity	394 L	104 gal
Cooling System	57.0 L	15.0 gal
Hydraulic System		
Total	100 L	26.4 gal
Tank	64.0 L	16.9 gal
Engine Oil	30.0 L	7.9 gal
Trans./Diff./Final Drives	70.0 L	18.5 gal
Tandem Housing (Each)	87.0 L	22.9 gal
Front Wheel Spindle Bearing Housing	0.5 L	0.13 gal
Circle Drive Housing	7.0 L	1.8 gal
Diesel Exhaust Fluid	22.0 L	5.8 gal

## Frame

Circle		
Diameter	1553 mm	61.1 in
Height	160 mm	6.3 in
Blade Beam Thickness	40.0 mm	1.6 in
Drawbar		
Height	152 mm	6.0 in
Width	76.2 mm	3.0 in
Thickness	12.7 mm	0.50 in
Front-Top/Bottom Plate		
Width	305 mm	12.0 in
Thickness	22.0 mm	0.87 in
Front Frame Structure		
Height	321 mm	12.6 in
Width	305 mm	12.0 in
Front Axle		
Height to Center	596 mm	23.5 in
Wheel Lean, Left/Right	18°	
Total Oscillation per Side	32°	

• Front-top/bottom plate – width tolerance  $\pm 2.5$  mm (0.098 in).

## Tandems

Height	572 mm	22.5 in
Width	204 mm	8.0 in
Sidewall Thickness		
Inner	17.5 mm	0.69 in
Outer	18.0 mm	0.71 in
Drive Chain Pitch	50.8 mm	2.0 in
Wheel Axle Spacing	1523 mm	60.0 in
Tandem Oscillation		
Front Up	15°	
Front Down	25°	



# 160M3/160M3 AWD Motor Graders Specifications

## Moldboard

Blade Width	4.2 m	14 ft
Moldboard		
Height	610 mm	24.0 in
Thickness	22.0 mm	0.87 in
Arc Radius	413 mm	16.3 in
Throat Clearance	166 mm	6.5 in
Cutting Edge		
Width	152 mm	6.0 in
Thickness	16.0 mm	0.60 in
End Bit		
Width	152 mm	6.0 in
Thickness	16.0 mm	0.60 in
Blade Pull		
Base GVW	11 762 kg	25,931 lb
Maximum GVW	15 541 kg	34,262 lb
Base GVW (AWD)	16 700 kg	36,817 lb
Maximum GVW (AWD)	22 512 kg	49,630 lb
Blade Down Pressure		
Base GVW	7713 kg	17,004 lb
Maximum GVW	13 294 kg	29,308 lb
Base GVW (AWD)	8589 kg	18,935 lb
Maximum GVW (AWD)	13 294 kg	29,308 lb

## Blade Range

Circle Centershift		
Right	728 mm	28.7 in
Left	695 mm	27.4 in
Moldboard Sideshift		
Right	660 mm	26.0 in
Left	510 mm	20.1 in
Maximum Blade Position Angle	90°	
Blade Tip Range		
Forward	40°	
Backward	5°	
Maximum Shoulder Reach Outside of Tires		
Right	2278 mm	89.7 in
Left	2090 mm	82.3 in
Maximum Lift Above Ground	452 mm	17.8 in
Maximum Depth of Cut	750 mm	29.5 in

## Ripper

Ripping Depth, Maximum	426 mm	16.8 in
Ripper Shank Holders	5	
Ripper Shank Holder Spacing	533 mm	21.0 in
Penetration Force	9440 kg	20,812 lb
Pryout Force	12 924 kg	28,493 lb
Machine Length Increase, Beam Raised	1031 mm	40.6 in

## Scarifier

Front, V-Type: Working Width	1205 mm	47.4 in
Front, V-Type, 5 or 11 Tooth		
Working Width	1031 mm	40.6 in
Scarifying Depth, Maximum	467 mm	18.4 in
Scarifier Shank Holders	5/11	
Scarifier Shank Holder Spacing	116 mm	4.6 in
Mid, V-Type		
Working Width	1184 mm	46.6 in
Scarifying Depth, Maximum	292 mm	11.5 in
Scarifier Shank Holders	11	
Scarifier Shank Holder Spacing	116 mm	4.6 in
Rear		
Working Width	2133 mm	84.0 in
Scarifying Depth, Maximum	426 mm	16.8 in
Scarifier Shank Holders	9	
Scarifier Shank Holder Spacing	267 mm	10.5 in

## Weights

Gross Vehicle Weight, Base		
Total	17 563 kg	38,719 lb
Front Axle	4494 kg	9,907 lb
Rear Axle	13 069 kg	28,812 lb
Gross Vehicle Weight, Maximum		
Total	25 013 kg	55,144 lb
Front Axle	7745 kg	17,075 lb
Rear Axle	17 268 kg	38,069 lb
Operating Weight, Typically Equipped		
Total	20 660 kg	45,547 lb
Front Axle	6004 kg	13,237 lb
Rear Axle	14 656 kg	32,310 lb



# 160M3/160M3 AWD Motor Graders Specifications

## Weights – AWD

### Gross Vehicle Weight, Base

Total	18 555 kg	40,908 lb
Front Axle	5004 kg	11,033 lb
Rear Axle	13 551 kg	29,875 lb

### Gross Vehicle Weight, Maximum

Total	25 013 kg	55,144 lb
Front Axle	7745 kg	17,075 lb
Rear Axle	17 268 kg	38,069 lb

### Operating Weight, Typically Equipped

Total	21 552 kg	47,514 lb
Front Axle	6481 kg	14,289 lb
Rear Axle	15 071 kg	33,225 lb

- Base operating weight on standard machine configuration is calculated with full fuel tank, coolant, lubricants, operator and 14.0R24 tires with multi-piece (MP) rims.
- Typically equipped operating weight is calculated with push block, transmission guard, rear ripper/scarifier, 17.5R25 tires with multi-piece (MP) rims, and other equipment.

## Standards


ROPS/FOPS	ISO 3471; ISO 3499
Steering	ISO 5010
Brakes	ISO 3450
Sound	ISO 6394; ISO 6395

- The declared dynamic operator sound pressure level is 71 dB(A) for the 160M Series 3 and 160M Series 3 AWD when “ISO 6396:2008” is used to measure the value for a European Union “CE” marked machine. The measurement was conducted at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds.
- The declared exterior sound power level is 107 dB(A) for the 160M Series 3 and 108 dB(A) for the 160M Series 3 AWD when the value is measured according to the dynamic test procedures and the conditions that are specified in “ISO 6395:2008.” The measurement was conducted for a European Union “CE” marked machine at 70% of the maximum engine cooling fan speed. The sound level may vary at different engine cooling fan speeds and during diesel particulate filter regeneration.



# M Series 3 Motor Graders Specifications

## Dimensions

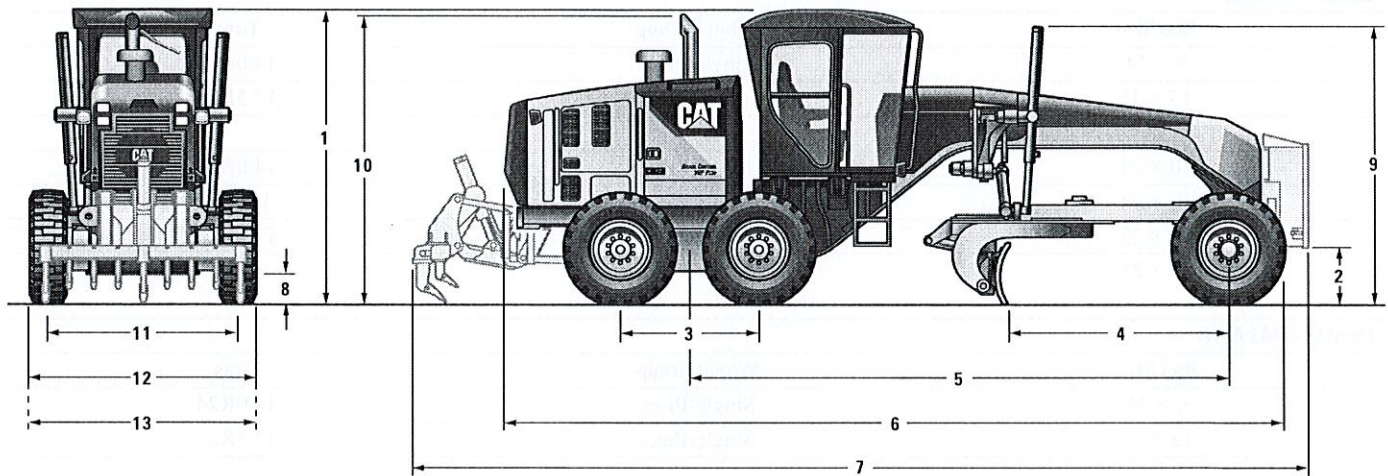

	12M3/12M3 AWD		140M3/140M3 AWD		160M3/160M3 AWD	
	mm	in	mm	in	mm	in
1 Height – Top of Cab	3308	130	3308	130	3308	130
2 Height – Front Axle Center	596	23.5	596	23.5	596	23.5
3 Length – Between Tandem Axles	1523	60.0	1523	60.0	1523	60.0
4 Length – Front Axle to Moldboard	2552	100	2552	100	2552	100
5 Length – Front Axle to Mid Tandem	6123	241	6123	241	6123	241
6 Length – Front Tire to Rear of Machine	8912	351	8912	351	8912	351
7 Length – Counterweight to Ripper	10 136	399	10 136	399	10 136	399
8 Ground Clearance at Rear Axle	339	13.3	339	13.3	339	13.3
9 Height to Top of Cylinders	3040	120	3040	120	3040	120
10 Height to Exhaust Stack	3256	128	3256	128	3256	128
11 Width – Tire Center Lines	2140	84.3	2140	84.3	2140	84.3
12 Width – Outside Rear Tires	2511	98.9	2511	98.9	2511	98.9
13 Width – Outside Front Tires	2511	98.9	2511	98.9	2511	98.9

• Calculated with 14.0R24 Tires.



# M Series 3 Motor Graders Specifications

## Optional Tire Arrangements

Common Tire Options for M Series 3 Motor Graders

### 12M3/12M3 AWD

Rim Size	Wheel Group	Tires
9 × 24	Single-Piece	14.0R24
13 × 25	Single-Piece	17.5R25
10 × 24	Multi-Piece	14.0R24
10 × 24	Multi-Piece	14.0-24
14 × 25	Multi-Piece	17.5R25
14 × 25	Multi-Piece	17.5-25

### 140M3/140M3 AWD

Rim Size	Wheel Group	Tires
9 × 24	Single-Piece	14.0R24
13 × 25	Single-Piece	17.5R25
10 × 24	Multi-Piece	14.0R24
10 × 24	Multi-Piece	14.0-24
14 × 25	Multi-Piece	17.5R25
14 × 25	Multi-Piece	17.5-25

### 160M3/160M3 AWD

Rim Size	Wheel Group	Tires
9 x 24	Single-Piece	14.0R24
13 x 25	Single-Piece	17.5R25
10 x 24	Multi-Piece	14.0R24
10 x 24	Multi-Piece	14.0-24
14 x 25	Multi-Piece	17.5R25
14 x 25	Multi-Piece	17.5-25

**Note:** Consult your dealer for individual tire width, size and brand.



## Standard Equipment

Standard equipment may vary. Consult your Cat dealer for details.

### POWER TRAIN

- Air cleaner, dual stage, dry type, diesel, with automatic engine derate and automatic dust ejector, service indicator through Cat Messenger
- Air-to-air after cooler (ATAAC)
- Belt, serpentine, automatic tensioner
- Brakes, oil disc, four-wheel, hydraulic
- Demand fan, hydraulic, swing-out
- Diesel exhaust fluid tank, 22.0 L (5.8 gal) ground level access, and sediment drain
- Differential Lock/Unlock, Automatic
- Drain, engine oil, ecology
- Economy mode
- Electronic over speed protection
- Engine, C9.3 with ACERT Technology, U.S. EPA Tier 4 Final/EU Stage IV emission standards
- Fuel tank, 394 L (104 gal), ground level access and sediment drain
- Parking brake – multi-disc, sealed, oil-cooled
- Priming pump, fuel
- Rear axle, modular
- Sediment drain, fuel tank
- Tandem drive
- Transmission, 8F/6R, powershift, direct drive, Advanced Productivity Electronic Control Strategy (APECS)

### ELECTRICAL

- Alarm, back up
- Alternator, 150 ampere, sealed
- Batteries, maintenance free, heavy duty, 1125 CCA
- Breaker panel, ground accessible
- Cab harness and electrical hydraulic valves
- Electrical system, 24V
- Grade Control Ready – Cab harness, software, electrical hydraulic valves, bosses and brackets
- Lights, roof-mounted roading, reversing, LED stop and tail
- Product Link
- Starter, electric

### OPERATOR ENVIRONMENT

- Accelerator
- Air conditioning with heater
- Arm and wrist rest, electronically adjustable
- Articulation, automatic Return-to-Center
- Cat Messenger operator information system
- Centershift pin indicator
- Coat hook
- Cup holder
- Display, digital speed and gear
- Doors, left and right side with wiper
- Gauge, machine level
- Gauge cluster (analog) – fuel, articulation, engine coolant temp, engine RPM, hydraulic oil temp, regen, DEF
- Hour meter, digital
- Joystick hydraulic controls right/left blade lift with float position, circle drive, blade sideshift and tip, centershift, front wheel lean, articulation and power steering
- Joystick, adjustable armrests
- Joystick gear selection
- Joystick hydraulic power steering
- Ladders, cab, left and right side
- Lights, night time cab
- Mirror, inside rearview, wide angle
- Power port, 12V
- Radio Ready, Entertainment
- ROPS cab, sound suppressed 70 dB(A)
- Seat, cloth-covered, comfort suspension
- Seat belt, retractable 76 mm (3 in)
- Storage area for cooler/lunchbox
- Throttle control, electronic
- Windows, laminated glass:
  - fixed front with intermittent wiper
  - door with intermittent wipers (3)
- Windows: tempered
  - left and right side wipers
  - rear and intermittent wiper

### FLUIDS

- Antifreeze
- Extended Life Coolant to  $-35^{\circ}\text{C}$  ( $-30^{\circ}\text{F}$ )

### TIRES, RIMS AND WHEELS

- Partial allowance for tires on  $254 \times 607$  mm ( $10 \times 24$  in) multi-piece rims is included in the base machine price and weight

### OTHER STANDARD EQUIPMENT

- Accumulators, brake, dual certified
- Anti-glare paint
- Bumper, rear, integrated with hitch
- CD ROM Parts Book
- Clutch, circle drive slip
- Cutting edges
  - $152 \times 16$  mm ( $6 \times 5/8$  in)
  - curved DH-2 steel
  - 19 mm ( $3/4$  in) mounting bolts
- Doors (3), engine compartment, locking
- Drawbar – 6 shoes, replaceable wear strips
- Electrical hydraulic valves, hydraulic lines for base 8 functions
- Endbits
  - 16 mm ( $5/8$  in) DH-2 steel
  - 19 mm ( $3/4$  in) mounting bolts
- Fluid check, ground level
- Frame, articulated, with safety lock
- Ground level engine shutdown
- Hammer (emergency exit)
- Horn, electric
- Hydraulic lines for base functions
- Lockout, hydraulic implement (for roading and servicing)
- Moldboard
- Mounting, cab roof accessories
- Pump, hydraulic, high capacity,  $98\text{ cm}^3$  ( $6\text{ in}^3$ )
- Radiator, cleanout access (both sides with swing doors)
- Secondary steering
- Serviceability, LH side
- S-O-S<sup>SM</sup> ports: engine, hydraulic, transmission, coolant, fuel
- Tandem walkway/guards
- Tool box



# M Series 3 Optional Equipment

## Optional Equipment

Optional equipment may vary. Consult your Cat dealer for details.

	kg*	lb*		kg*	lb*		kg*	lb*
<b>ELECTRICAL</b>			<b>POWER TRAIN</b>			<b>WORK TOOLS/G.E.T.</b>		
• Alternator, 280 ampere	2	5	• All Wheel Drive	892	1,967	• Blade extension, left hand, 610 mm (2 ft)	113	249
• Batteries:			• Precleaner, snow	2	5	• Blade extension, right hand, 610 mm (2 ft)	113	249
– extreme duty, 1,400 CCA	14	30	• Starter, extreme duty, 1,000 Amps	22	48	• Counterweight	427	939
• Lights:			• Transmission, autoshift	2	5	• Cutting edges, curved	43	95
– Headlights, high	38	84	<b>OTHER ATTACHMENTS</b>			• Endbits, overlay	24	52
– Headlights, low	35	77	• AccuGrade ARO	46	101	• Front lift group, mounting	5	11
– Working lights, basic	9	20	• Integrated cross slope	47	103	• Front lift group, mechanical	680	1,500
– Working lights, plus	10	22	• Accumulators, blade lift	55	121	• Grader bit, narrow and super penetration	181	400
– Warning: beacon or strobe	2	5	• Camera, rearview	9	20	• Mid-Mount Scarifier, Package	917	2,017
– Mounting for warning light	5	11	• Cat Product Link 321SR	13	29	• Moldboard		
<b>GUARDS</b>			• Cat Product Link 522	13	29	– 4267 mm × 610 mm × 22 mm (14 ft × 24 in × 7/8 in)	147	323
• Articulation guard	5	11	• Drain, ecology, engine Wiggins	2	5	– 4267 mm × 686 mm × 25 mm (14 ft × 27 in × 1 in)	284	625
• Fenders, front	121	266	• Heater, engine coolant:			<b>160M3/160M3 AWD only:</b>	472	1,040
• Fenders, front, AWD	56	124	– 120V	1	3	– 4877 mm × 686 mm × 25 mm (16 ft × 27 in × 1 in)		
• Fenders, rear	156	344	– 240V	1	3	• Push plate	1285	2,833
• Front axle guard	13	30	• Hydraulic arrangements with one or more additional hydraulic valves are available for rear ripper, dozer, snow plow and snow wing.			• Ripper, rear	1042	2,292
• Sound suppression (bottom)	110	243	• Snow wing mounting, frame ready	91	200	• Ripper tooth	28	61
• Sound suppression (enclosure)	15	33	• Starting aid, ether	0.5	1	• Scarifier, front	434	956
• Transmission	141	311				• Snow Arrangement	161	355
<b>OPERATOR ENVIRONMENT</b>						• Snow Wing Ready Package	119	262
• Mirrors, outside:						• Tow hitch	53	116
– heated 24V	15	33				<b>MACHINE ARRANGEMENTS</b>		
– mounted	15	33				• Canadian Arrangement	2	4
• Comfort Plus Arrangement	2	4				• European Arrangement	289	637
• Comfort Premium Arrangement	3	7				• TUV Roding Arrangement	451	994

\*Weights shown are to be added to the standard configuration when option is chosen.







For more complete information on Cat products, dealer services,  
and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

AEHQ7144 (01-2014)

© 2014 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice.  
Featured machines in photos may include additional equipment.  
See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos,  
"Caterpillar Yellow" and the "Power Edge" trade dress, as well  
as corporate and product identity used herein, are trademarks  
of Caterpillar and may not be used without permission.





**MOTOR GRADERS****BID SPECIFICATION FOR 140M3 OR EQUIVALENT**

Compliant?

**FUEL GUARANTEE**

Y \_\_\_ N \_\_\_ Manufacturer will guarantee fuel burn at a rate of 4 gallons per hour (15 liters per hour in Canada) for a term of 3 years or 5,000 hours, whichever comes first by reimbursing the difference between the actual fuel burn (measured by machine system) and the Fuel Guarantee Level at a rate of at least \$1 USD per US gallon (\$1 CAD per liter in Canada) per hour of operation payable in the form of a parts and service credit.

**BASIC SPECIFICATIONS**

Y \_\_\_ N \_\_\_ Machine shall be designed and built by the manufacturer.

Y \_\_\_ N \_\_\_ Base Machine Weight shall not be less than 38,191 lbs (17,323 kg). Weight shall include standard machine configuration, lubricants, coolants, full fuel tank and operator of 200 lbs (91 kg).

Y \_\_\_ N \_\_\_ Machine height to top of the cab shall not exceed 130 in (3,308 mm).

Y \_\_\_ N \_\_\_ Machine length from the front outside edge tire to end of tow hitch shall not be less than 351 in (8,912 mm).

Y \_\_\_ N \_\_\_ Machine Wheel Base (distance from front axle to mid tandem) shall not be less than 241 in (6123 mm).

Y \_\_\_ N \_\_\_ The rear frame shall have two box section channels with an integrated bumper as standard.

Y \_\_\_ N \_\_\_ A toolbox shall be provided.

**BASIC SPECIFICATIONS-OPTIONAL ATTACHMENTS**

Y \_\_\_ N \_\_\_ Machine shall have vandal protection standard including locks for cab doors, engine side shields (4), top tank radiator access door, engine coolant surge tank, hydraulic reservoir cap, fuel tank cap and tool box.

Y \_\_\_ N \_\_\_ An optional rear hitch shall be provided

Y \_\_\_ N \_\_\_ Machine length from counterweight to ripper shall not exceed 399 in (10,136 mm).

**ENGINE**

Y \_\_\_ N \_\_\_ Engine shall be designed and built by the manufacturer.

Y \_\_\_ N \_\_\_ Engine shall be a turbo-charged, direct injection, four stroke, 6-cylinder diesel engine.

Y \_\_\_ N \_\_\_ Engine shall be certified EPA Tier 4 Final and European Union Stage IV

Y \_\_\_ N \_\_\_ Engine shall be electronically controlled for more efficient fuel injection and fuel burn.

Y \_\_\_ N \_\_\_ Engine shall achieve rated power requirement with engine displacement not less than 9.3L (568 in<sup>3</sup>) for better performance and fuel economy.

Y \_\_\_ N \_\_\_ Engine shall develop as standard a rated net flywheel power of at least 200 HP (149 kW) in 1st gear, 210 HP (156 kW) in 2nd gear, 220 HP (164 kW) in 3rd gear, 231 HP (172 kW) in 4th gear, 236 HP (176 kW) in 5th gear, 241 HP (180 kW) in 6th gear, 247 HP (184 kW) in 7th gear and 252 HP (188 kW) in 8th gear.

Y ☒ N \_\_\_ **Engine will increase its low idle speed to 1,000 rpm when the battery voltage is below 24.5 volts for more than 5 minutes to ensure adequate system voltage and battery reliability.**

Y \_\_\_ N \_\_\_ Altitude deration will not occur at altitudes less than 10,000 ft (3050 m). The deration rate above 10,000 ft (3050 m) shall be 1.5% per 1000 ft (305 m).

Y \_\_\_ N \_\_\_ Peak engine power shall not be achieved at an engine speed greater than 1800 rpm.

Y \_\_\_ N \_\_\_ Rated engine power shall not be achieved at an engine speed greater than 2000 rpm.

Y \_\_\_ N \_\_\_ Engine will have an minimum torque rise of 47% from 2000 rpm to peak torque following SAE J1349 (net power with max fan).

Y \_\_\_ N \_\_\_ Engine enclosure and daily service points shall be accessible from ground level and grouped on the left side of the machine.

Y \_\_\_ N \_\_\_ Engine fan shall automatically adjust fan speed via a variable hydraulic fan pump to meet engine cooling requirements thus reducing demand on the engine, putting more horsepower to the ground, reducing noise, improving fuel economy, and reducing heat.

Y \_\_\_ N \_\_\_ Engine shall allow for at least 500 hours of operation between oil changes.

Y \_\_\_ N \_\_\_ Engine shall be isolation/resilient mounted to minimize sound and vibration.



**MOTOR GRADERS****BID SPECIFICATION FOR 140M3 OR EQUIVALENT**

<input checked="" type="checkbox"/>	<input type="checkbox"/>	<b>Engine compartment doors shall be lockable without the use of external locks.</b>
<input type="checkbox"/>	<input type="checkbox"/>	Engine shall automatically lower engine torque and alert the operator if critical conditions are detected.
<input type="checkbox"/>	<input type="checkbox"/>	Engine shall have an air-to-air after cooler for superior engine performance.
<input type="checkbox"/>	<input type="checkbox"/>	Engine oil cooler shall be a water to oil shell and tube cooler system.
<input type="checkbox"/>	<input type="checkbox"/>	Machine shall have a 12000 hour coolant interval from factory.
<input type="checkbox"/>	<input type="checkbox"/>	The cooling package air intake shall have 2.8 mm perforated inlet screen.
<input type="checkbox"/>	<input type="checkbox"/>	The charged air cooler (ATAAC) shall have 6 fins per inch.
<input type="checkbox"/>	<input type="checkbox"/>	Economy mode shall be available directly from factory to increase net efficiency.
<input type="checkbox"/>	<input type="checkbox"/>	Economy mode shall be able to be enabled and disabled by the operator through the onboard Message Display.
<input type="checkbox"/>	<input type="checkbox"/>	Economy mode shall be lockable via onboard programmable password protection.
<input type="checkbox"/>	<input type="checkbox"/>	DEF tank reservoir shall have a heater to thaw DEF fluid.
<input type="checkbox"/>	<input type="checkbox"/>	DEF lines should be heated to prevent freezing during extremely cold ambient conditions.

**ENGINE-OPTIONAL ATTACHMENTS**

<input type="checkbox"/>	<input type="checkbox"/>	An engine coolant heater shall be available to assist in cold weather starting.
<input type="checkbox"/>	<input type="checkbox"/>	Ether starting aid shall be available and must automatically meter ether injection to prevent engine damage.

**POWERTRAIN/TRANSMISSION**

<input type="checkbox"/>	<input type="checkbox"/>	Transmission shall be designed and built by the machine manufacturer.
<input type="checkbox"/>	<input type="checkbox"/>	Transmission shall be a direct drive, power shift, countershaft type.
<input type="checkbox"/>	<input type="checkbox"/>	Transmission shall be equipped with built-in self-diagnostic capability.
<input type="checkbox"/>	<input type="checkbox"/>	Transmission shall have no less than 8 forward speeds and 6 reverse speeds( for added safety).
<input type="checkbox"/>	<input type="checkbox"/>	Transmission shall have 5 working gears between 0-10.6 mph (0-17.1 km/h), for dirt applications.
<input type="checkbox"/>	<input type="checkbox"/>	Transmission shall be isolated/resilient mounted to reduce sound and vibration.
<input type="checkbox"/>	<input type="checkbox"/>	A controlled throttle shifting system shall be standard to smooth directional gear changes without use of the inching pedal.
<input type="checkbox"/>	<input type="checkbox"/>	Electronic Throttle Control (cruise control) shall be standard and shall be controlled by a push button, located on a 3-axis joystick as standard on the right joystick control for resuming and decreasing throttle set.
<input type="checkbox"/>	<input type="checkbox"/>	Electronic Throttle Control modes, set and accelerate functions, shall be located on the right control column for easy access.
<input type="checkbox"/>	<input type="checkbox"/>	A load compensating system for the transmission shall be standard to ensure consistent shift quality in all applications.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<b>Automatic Differential Lock/Unlock feature shall be standard and shall not have speed, shuttle shifting or tandem spinning restrictions for engaging/disengaging. System must be load-sensing for optimal performance.</b>
<input type="checkbox"/>	<input type="checkbox"/>	Automatic mode shall not be overridden via manual intervention for optimal performance and to prevent unintended differential engagement
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<b>Differential Lock/Unlock shall be electro-hydraulically controlled, as a standard feature.</b>
<input type="checkbox"/>	<input type="checkbox"/>	Differential Lock/Unlock shall be a multi-disc design.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<b>Final drive shall be a planetary design.</b>
<input type="checkbox"/>	<input type="checkbox"/>	The rear axle shall be a bolt-on modular design offering easy access to differential components, improving serviceability and contamination control.
<input type="checkbox"/>	<input type="checkbox"/>	The total surface area of all the transmission clutch packs shall not be less than 1831 in <sup>2</sup> (11,812cm <sup>2</sup> ).
<input type="checkbox"/>	<input type="checkbox"/>	Diameter at the output end of the transmission shaft shall be no less than 2.29 in (58.1 mm).
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<b>Machine shall be equipped with an electronic inching pedal for improved modulation and machine control.</b>
<input type="checkbox"/>	<input type="checkbox"/>	Machine shall be equipped with electronic over-speed protection to prevent the engine and transmission from over speeding, as a standard feature.
<input type="checkbox"/>	<input type="checkbox"/>	Machine shall have no drive shafts that cross over the articulation hitch.



**MOTOR GRADERS****BID SPECIFICATION FOR 140M3 OR EQUIVALENT****POWERTRAIN/TRANSMISSION-OPTIONAL ATTACHMENTS**

Y \_\_\_ N \_\_\_ An autoshift transmission option shall be available on all forward and reverse gears.

**STEERING & IMPLEMENT CONTROLS**

Y \_\_\_ N \_\_\_ Steering wheel shall not be required to operate machine.

Y \_\_\_ N \_\_\_ Joystick Steering capabilities shall be ISO 5010:1992.

Y \_\_\_ N \_\_\_ Machine shall employ a friction pack style steering mechanism, utilizing the follow steer concept.

Y \_\_\_ N \_\_\_ The left 3-axis joystick shall control wheel lean with individual left and right wheel lean buttons as standard.

Y \_\_\_ N \_\_\_ **Primary steering shall be achieved via a left-hand, multifunction, 3-axis joystick as standard, using an intuitive steering control system that automatically adjusts steering sensitivity as machine ground speed increases.**

Y \_\_\_ N \_\_\_ Articulation to the right or left shall be achieved by a multifunction, 3-axis left joystick with the twist of such to the right or left by the left-hand, multifunction, 3-axis joystick.

Y \_\_\_ N \_\_\_ An articulation return-to-center button on the left-hand, multifunction, 3-axis joystick shall return the machine to a straight frame position from any articulation angle with the touch of a single button.

Y \_\_\_ N \_\_\_ The right 3 axis joystick shall primarily control the Drawbar, Circle, and Moldboard.

Y \_\_\_ N \_\_\_ Machine, Drawbar, Circle, and Moldboard shall be control shall be achieved via a right hand multifunction, 3-axis, joystick, including moldboard slide and tip, drabar center shift through a 4 way hat switch and circle turn by a left or right twist intuitively.

Y \_\_\_ N \_\_\_ Blade lift cylinders shall be individually controlled by the multifunction, 3 axis joysticks; Lift and drop of cylinders shall be achieved by the forward and back motion of the respective joystick. Forward(left joystick) lowers left lift cylinder, back(left joystick)raises the left lift cylinder, forward(right joystick) lowers the right right lift cylinder, back(right joystick) raises the right lift cylinder.

Y ☒ N \_\_\_ **Joystick controls shall be mounted to electronically adjustable pedestals, which are hard mounted to the cab floor, independent of the operator seat.**

Y \_\_\_ N \_\_\_ Secondary steering shall have a primary and secondary power supply in the event the primary source is lost.

Y ☒ N \_\_\_ **Transmission direction control shall be a 3-position rocker switch for selecting forward, neutral, and reverse incorporated into a single, 3-axis, multi-function, left-hand joystick control.**

Y \_\_\_ N \_\_\_ Transmission gear selection shall be controlled by dual push buttons for up shifting and downshifting and shall be incorporated into a single, 3-axis, multi-function, left-hand joystick control.

Y ☒ N \_\_\_ **Manual Differential Lock/Unlock shall be operator controlled, via a push-button, located on a single, 3-axis, multi-function, right-hand joystick control.**

Y \_\_\_ N \_\_\_ The machine shall have two redundant articulation sensors.

Y \_\_\_ N \_\_\_ Two redundant sensors shall be standard in the steering cylinders (one in each).

Y \_\_\_ N \_\_\_ Three redundant sensors shall be provided in the steering joystick for additional safety.

**BRAKES**

Y \_\_\_ N \_\_\_ Machine shall have primary and secondary service brakes.

Y \_\_\_ N \_\_\_ Entire braking system shall meet all requirements of ISO 3450: 1996.

Y \_\_\_ N \_\_\_ Two separate left and right hydraulic brake accumulators shall be standard for safety.

Y \_\_\_ N \_\_\_ Parking brake shall be multi-disc, oil-cooled, spring-applied, hydraulically released, sealed, adjustment-free, and integrated into the transmission. Park brake shall not be externally located.

Y \_\_\_ N \_\_\_ Parking brake shall be serviceable without removing the transmission.

Y \_\_\_ N \_\_\_ Service brakes shall be multi-disc, oil-cooled and completely sealed; they will also provide access to check and determine brake wear without removing or disassembling the brake assembly.

Y \_\_\_ N \_\_\_ Service brake disc surfaces shall be grooved and carry oil between discs and plates with brakes fully applied.

Y \_\_\_ N \_\_\_ Service brakes shall be hydraulically actuated, utilizing dual independent brake circuits.

Y \_\_\_ N \_\_\_ Brakes shall be continuously pressurized, filtered, oil cooled.



**MOTOR GRADERS****BID SPECIFICATION FOR 140M3 OR EQUIVALENT**

Y___ N___	Machine shall have individual brake pods for each rear wheel, located at each rear wheel inside the tandem box, independent of tandem chains.
Y___ N___	Compensation components shall be required at all four tandem brake pods in addition to the brake wear indicator.
Y___ N___	Brake line protection, including tandem walkways and hydraulic brake line guarding, shall be required to prevent line damage.
Y___ N___	Service brakes shall provide a minimum of 620 in <sup>2</sup> (4,003 cm <sup>2</sup> ) of friction material surface area at each of the four tandem wheels to eliminate braking loads on the power train.

**HYDRAULIC SYSTEM**

Y___ N___	A standard triple-redundant hydraulic relief system shall protect machine hydraulic components.
Y___ N___	Hydraulic implement pump shall produce between 0 and 55.0 gal/min (210 L/min) of oil flow at 1,800 RPM.
Y <input checked="" type="checkbox"/> N___	<b>Hydraulics system shall be a closed center, load sensing type with a variable displacement, axial piston-type pump.</b>
Y___ N___	Hydraulic system shall be fully sealed, using Duo-cone and O-ring face seals to prevent leaks, contamination, and spillage.
Y___ N___	The hydraulic tank shall have a baffling system to reduce potential pump cavitation.
Y___ N___	The maximum hydraulic system pressure shall be no more than 3,500 psi (24,150 kPa).
Y <input checked="" type="checkbox"/> N___	<b>Implement valves shall be electro-hydraulic, designed and built by the machine manufacturer.</b>
Y___ N___	Implement pump shall not be mounted under cab floor, minimizing sound and vibration.
Y___ N___	Implement valves shall be proportional priority pressure compensating for consistent response when multi-functioning any combination of implement controls and independent of engine speed.
Y___ N___	Implement pump shall be solely dedicated to implement controls and not shared with any other components.
Y <input checked="" type="checkbox"/> N___	<b>Lock valves shall be integrated into the main implement valve to prevent cylinder drift.</b>
Y___ N___	The hydraulic stand-by pressure shall be no more than 885 psi (6100 kPa) at 1,800 RPM.
Y___ N___	There shall be a provision to install up to 15 modulating hydraulic valves, controlled by two multifunction, 3-axis joystick controls and auxiliary controls inside the cab.
Y___ N___	Hydraulic valves shall not be mounted under the cab floor, minimizing sound and vibration.
Y <input checked="" type="checkbox"/> N___	<b>Left and right blade lift cylinders shall have independent float capability, actuated by two multifunction, 3-axis joystick controls inside the cab, as a standard feature.</b>
Y___ N___	A sight gauge will be provided for checking hydraulic reservoir fluid.
Y___ N___	Hydraulic oil change service interval shall be no less than 6000 hours with oil sampling
Y___ N___	Hydraulic system shall have a separate oil tank solely dedicated to the implement pump.

**FRONT AXLE AND TANDEM**

Y___ N___	Front axle oscillation shall be no less than 32 degrees total, per side 16 degrees up and 16 degrees down.
Y___ N___	Front axle shall be an arched design for maximum ground clearance.
Y___ N___	Wheel spindle shall be a "live" spindle design and rotate inside a sealed (with Duo-Cone seals) compartment with lightweight oil for lubrication of the bearings.
Y___ N___	Front spindle shall be heat induction hardened.
Y___ N___	Front wheel spindle bearings shall be a double-tapered design with the larger diameter bearing mounted closest to the centerline of the front tire.
Y___ N___	Front wheel spindle maintenance intervals shall be no less than 2000 hrs.
Y <input checked="" type="checkbox"/> N___	<b>Front wheel steering angle shall be no less than 50.0 degrees left or right.</b>
Y___ N___	Maximum front wheel lean shall be no less than 18 degrees left or right.
Y___ N___	Machine turning radius shall not exceed 25 ft. 7 in. (7.8 m) using front steering, full articulation and unlocked differential.
Y___ N___	Distance between center of tandem wheels shall be no greater than 60.0 in (1523 mm) for optimum clearance and mobility.
Y___ N___	Tandem drive chain pitch shall not be less than 2.0 in (50.8 mm).



**MOTOR GRADERS****BID SPECIFICATION FOR 140M3 OR EQUIVALENT**

Y___ N___	Tandems shall be capable of oscillating 15 degrees front tandem up and 25 degrees front tandem down, with full machine articulation and having no interference between tandem wheel and machine structure.
Y___ N___	Electronic and mechanical steering stops located at each wheel and steering cylinder relief valves shall be present to prevent steering system damage during normal operation.
Y___ N___	Steering tie rod ends shall be heat induction hardened.
Y___ N___	Machine shall provide 2 steering cylinders for maximum steering force.
Y___ N___	When equipped with a ripper, the machine shall have a minimum ramp angle of 15.9 degrees.

**TIRES AND RIMS**

Y___ N___	A 10 in (25.4 cm) by 24 in (60.96 cm) size 3-piece tire rim shall be standard to provide mounting for 14.00-24 tires and 14.00R24 conventional tires
-----------	--

**TIRES AND RIMS-OPTIONAL ATTACHMENTS**

Y___ N___	A 9 in (22.86 cm) by 24 in (60.96 cm) size single-piece tire rim shall be available to provide mounting for a 14.00R24 conventional tires
Y___ N___	A 13 in (33.0 cm) by 25 in (63.5 cm) size single-piece tire rim shall be available to provide mounting for 17.5-25 tires.
Y___ N___	A 14 in (35.6 cm) by 25 in (63.5 cm) size 3-piece tire rim shall be available to provide mounting for 17.5-R25 tires.

**OPERATORS STATION**

Y___ N___	A 42,075 BTU/h (12.3 kW) heater shall have an integral pressurizer and four-speed fan along with A/C.
Y___ N___	Cab shall have angled floor design allowing direct visibility to moldboard.
Y___ N___	Seat shall be a cloth-covered suspension seat with 3 in (76 mm) retractable seat belts, with adjustments for fore-aft position, seat height, seat back angle, thigh support, and lumbar support.
Y___ N___	An enclosed cab with ROPS (Rollover Protective Structure) according to ISO 3471: 1986-1997 shall be provided.
Y___ N___	Cab doors shall have a hold-open clasp with a ground-level release in addition to a release in the cab.
Y___ N___	Cab shall be isolation-mounted to the front frame section of the machine.
Y___ N___	Cab shall have fixed front window of laminated glass with intermittent wiper.
Y___ N___	FOPS (Falling Object Protective Structure) shall be provided according to ISO 3449.
Y___ N___	Machine shall have no less than 17 adjustable vents, positioned to direct air to front windows and operator.
Y___ N___	Radio ready arrangement will include 24V to 12V converter, two speakers, antenna and wiring.
Y___ N___	An instrument cluster shall be provided that includes a speedometer, tachometer, coolant temperature, fuel and articulation angle gauge.
Y___ N___	Operator cab fresh air-filter shall be accessible for clean out and replacement, from outside of the cab at ground level.
Y___ N___	Machine shall have the AccuGrade™ system fully integrated into the machine design with integral hydraulic and electrical components.
Y___ N___	A real-time information system shall monitor all system data and alert the operator of any faults through a digital text display. This performance and diagnostic information system shall be programmable for multiple languages .
Y___ N___	Left and right side cab doors shall be provided.
Y___ N___	Wipers shall be provided on side and rear windows.
Y___ N___	Digital machine hour meter shall be provided.
Y___ N___	An electronic message system shall provide real-time machine performance and diagnostic data.
Y___ N___	The forward visibility shall be continuous and unobstructed glass from roofline to floor providing visibility of the blade, heel and toe, back of the cutting edge, and front tires.
Y___ N___	Access to cab shall be three anti-skid steps.
Y___ N___	Cab shall have cup holder, personal cooler holder/storage compartment for operator's manual, with a molded floor mat.



	<b>MOTOR GRADERS</b>
	<b>BID SPECIFICATION FOR 140M3 OR EQUIVALENT</b>
Y___ N___	Window washer fluid bottle refill spout shall be located external of the cab.
Y___ N___	DEF guage must be visible to the operator at all times.
	<b>OPERATORS STATION-OPTIONAL ATTACHMENTS</b>
Y___ N___	An auxiliary control pod, with implement float control capability, shall be available.
Y___ N___	Auxiliary controls shall be available for control of attachment implements and/or work tools and shall be programmable via computer software.
Y___ N___	Auxiliary controls shall be a finger-tip control type and located beside the right-hand joystick control.
Y___ N___	An auxiliary, 2-axis joystick shall be available for control of a snow wing.
Y___ N___	Integrated Cross Slope System shall be available from the factory in order to ensure proper calibration and installation for improved accuracy and performance.
Y___ N___	Integrated display and wiring for a rear vision camera shall be available with capability to view at all times without interfering with the guage and diagnostic display.
Y___ N___	A rear sun shade shall be available.
Y___ N___	A rear defroster fan shall be available.
Y___ N___	A machine security system shall be available to electronically code keys selected by the user to limit usage by individuals or by time parameters.
Y___ N___	AccuGrade™ automatic blade control system attachment ready option shall be available from the factory. This option shall include additional mounting brackets and electrical harnesses for easy installation of the electronics kit.
Y___ N___	An air suspension seat shall be available.
Y___ N___	Anti-icing glass shall be available for front windshield and RH door.
Y___ N___	A heated or both heated/ventilated seat shall be available.
Y___ N___	Machine shall have integrated Cat Grade Control Cross Slope available from the factory.
Y___ N___	Machine shall have an integrated cross slope system with cross coupling software to prevent automatic response lag (or saw-tothing) in order to maintain consistency and ensure accuracy.
Y___ N___	Machine shall have an integrated cross slope system that is fully upgradeable to other 2D/3D blade control systems, to increase machine resale value.
Y___ N___	Machine shall have a display for cross slope information that is separate from critical machine information such as engine RPM, ground speed and fluid temperature monitoring to ensure safe operation.
	<b>CIRCLE &amp; MOLDBOARD</b>
Y <input checked="" type="checkbox"/> N___	<b>Drawbar, circle, and moldboard shall be controlled with a maximum of two multifunction, 3-axis joysticks, as standard.</b>
Y <input checked="" type="checkbox"/> N___	<b>Drawbar wear strips shall be replaceable drop-in inserts made from nylon composite material, replaceable and adjustable from the top of the drawbar plate via removable cover plates.</b>
Y <input checked="" type="checkbox"/> N___	<b>The drawbar shall feature welded protective wear plates to prevent lift group contact with the primary drawbar structure.</b>
Y___ N___	The standard moldboard shall be at least 12 ft (3657 mm) long, 24 in (610 mm) high and no less than 7/8 in (22 mm) thick.
Y___ N___	Moldboard shall have a bank slope angle capability of at least 90 degrees to both sides.
Y___ N___	Moldboard side-shift cylinder shall be installed on the left-hand side to prevent snow wing interference with the cylinder rod.
Y___ N___	Moldboard shall have no less than 16.3 in (413 mm) arc radius (blade curvature) for optimum productivity.
Y___ N___	The moldboard retention system shall have no more than two retention points located on the left and right side of the moldboard. The surface area shall not be less than 50408 mm <sup>2</sup> (78.13 in <sup>2</sup> ).
Y___ N___	Moldboard shall have a hydraulic tip control through a range of 40 degrees fore and 5 degrees aft.
Y___ N___	Moldboard wear strips shall be adjusted with lock screws, providing shim-less adjustment capability both vertical & horizontal.
Y___ N___	The moldboard shall be pre-stressed during manufacturing for superior strength and durability.
Y___ N___	Moldboard slide rails shall be constructed of a heat-treated, high carbon steel and have replaceable bronze alloy wear inserts on top and bottom.



**MOTOR GRADERS****BID SPECIFICATION FOR 140M3 OR EQUIVALENT**

Y ___ N ___	Circle shall be a single piece, rolled-ring forging with raised wear surfaces on the top and bottom.
Y <input checked="" type="checkbox"/> N ___	Circle shall be rotated by a hydraulically driven motor (pinion gear) with a minimum circle pinion torque capability of 44253 ft-lb (60,000 N-m).
Y ___ N ___	Circle teeth contact surfaces shall be induction-hardened on the front 240 degrees of the circle.
Y ___ N ___	Blade lift and center shift cylinders shall have replaceable bronze-alloy wear inserts in the ball sockets with removable shims to insure the ability to remove free play throughout the useful wear insert life.
Y ___ N ___	The lift cylinder casting shall be welded to the front frame for added strength and structural integrity.
Y ___ N ___	The standard mounting hardware for cutting edges and end bits shall be 3/4 in (19 mm)
Y ___ N ___	All 7 Link Bar positions have replaceable bushings.
Y ___ N ___	Linkbar pin shall be separate from pin pulling mechanism for easier service and lower O&O costs.
Y ___ N ___	The draft frame pivot connection shall have a single ball stud with grease zerk. Ball stud shall be bolt-on, shimable and adjustable to allow for quick and easy field serviceable design.
Y ___ N ___	There shall be 3 sideshift anchor positions shall be provided for extended reach capability as standard.
Y ___ N ___	Pinion Gear shall be separate from the Pinion Shaft to allow for a quick and easy serviceable design.
Y ___ N ___	Circle outside diameter shall be no less than 60.2 in (1530 mm).
Y ___ N ___	Throat clearance with standard moldboard shall be at least 153 mm.
Y <input checked="" type="checkbox"/> N ___	There will be no more than 6 replaceable wear inserts between the circle and drawbar providing at least 163 in <sup>2</sup> (1051 cm <sup>2</sup> ) of wear surface area.

**CIRCLE & MOLDBOARD-OPTIONAL ATTACHMENTS**

Y ___ N ___	A 14 ft (4267 mm) long, 24 in (610 mm) high and no less than 7/8 in (22 mm) thick moldboard shall be available.
Y ___ N ___	Blade lift accumulators shall be provided, protecting cutting edge and other components from damage from shock loads as an option.

**ELECTRICAL**

Y ___ N ___	Machine shall have a 145 amp-hour, 1125 CCA heavy-duty battery.
Y ___ N ___	Machine shall have a minimum 150-amp alternator at 24 volts provided which is brushless for increased life and durability.
Y ___ N ___	Six 3 x 3 in (76 x 76 mm) halogen mounted cab lights shall be provided.
Y ___ N ___	A 24 V to 12 V converter with 10-amp capacity shall be provided.
Y ___ N ___	Starting system shall be a 24V direct electric type.
Y ___ N ___	LED white reversing lamps and LED stop lamps shall be provided.
Y ___ N ___	Electrical system shall have a master disconnect switch with a removable key (in addition to the ignition switch), accessible from the ground level.
Y ___ N ___	All core machine systems shall be electronically connected, optimizing performance and preventing machine damage.
Y ___ N ___	All wiring shall be arranged and located so as to facilitate regular visual inspections, not be in contact with hot surfaces and not routed with other services lines (e.g. fuel, oil, etc.).
Y ___ N ___	All harnesses / cabling are secured with clipping clamps providing a gap between the conduit/harness and the mounting surface preventing material build-up.
Y ___ N ___	Power must remain available upon key off to purge DEF system lines and protect components.

**ELECTRICAL-OPTIONAL ATTACHMENTS**

Y ___ N ___	Machine shall have 200 amp-hour, 1400 CCA extra heavy-duty batteries available.
Y ___ N ___	Machine shall have a 280-amp alternator at 24 volts available which is brushless for increased life and durability.
Y ___ N ___	There will be 2 (3 x 3 in) (76 x 76 mm) halogen mounted on the right-hand side of car roof bar to illuminate a snow wing shall be available.



**MOTOR GRADERS****BID SPECIFICATION FOR 140M3 OR EQUIVALENT**

Y___ N___	There will be 2 (3 x 3 in )(76 x 76 mm) halogen heel work lamps mounted underneath the cab shall be available as an option.
Y___ N___	There will be 2 (3 x 3 in) (76 x 76 mm) halogen mid-frame toe lamps shall be available to illuminate moldboard and surrounding area as an option.
Y___ N___	There will be 2 (3 x 3 in) (76 x 76 mm) halogen ripper work lamps shall be available as an option.
Y___ N___	High and low bar headlights with front turn signals shall be available.
Y___ N___	An amber LED high-speed strobe beacon shall be available.
Y___ N___	24V to 12V converter with 25-amp capacity shall be available.

**SERVICEABILITY**

Y___ N___	Machine shall have a lockable swing-out cooling fan housing featuring a latch-style mechanism (shall not be of a bolted design), allowing easy access to cores. Ability to open/close shall be ground level accessible, eliminating need to climb on machine.
Y___ N___	The dip stick for checking transmission fluid shall be at ground level.
Y___ N___	Hydraulic tank site gauge shall be readable from the ground.
Y___ N___	Hydraulic tank filter shall be a cartridge style filter providing a separate filter element, housing, and drain valve for quick and clean servicing.
Y___ N___	Ability for ground level fueling shall be provided.
Y___ N___	Sampling ports shall be accessible from the tandem level and provide access to the engine, hydraulic, coolant, and fuel ports.
Y___ N___	A two-way communication tool shall give service technicians easy access to stored diagnostic data and allow configuration of machine parameters.
Y___ N___	Machine shall provide 3 points of contact on all areas of the machine, for mounting and dismounting.
Y___ N___	The articulation joint shall have mechanical locking device to prevent frame articulation while servicing or transporting machine.
Y___ N___	Left and right side tandem case assemblies shall be covered with punched steel plate to provide an adequate platform for standing and walking.
Y___ N___	Engine oil filter shall be a 500 hour, vertical spin-on
Y___ N___	Engine primary and final fuel filters shall have 500 hour service replacement interval.
Y___ N___	Engine shall have primary fuel filter with fuel water separator and electronic sensor, quick release dual stage filter and primer pump.
Y___ N___	The centralized lube bank shall be at the articulation joint to give access to difficult zerks.
Y___ N___	Transmission filter restriction indicator shall be displayed in the cab.
Y___ N___	Lock out Tag out capabilities shall be provided standard and increase the safety levels during down time. This ensures that an energy isolating device and the machine which are being worked on and cannot be operated
Y___ N___	DEF tank fill shall be located on the same side of the fuel tank fill, and be easily accessible from ground level.

**SERVICEABILITY-OPTIONAL ATTACHMENTS**

Y___ N___	A guard shall be available to protect the machine's transmission from debris.
Y___ N___	A guard shall be available to suppress sound from the engine.

**MINIMUM SERVICE FILL CAPACITIES**

Y___ N___	Standard fuel tank capacity shall not be less than 104 gallons (394 L).
Y___ N___	Standard cooling system capacity shall not be less than 15.0 gallons (57.0 L).
Y___ N___	Standard hydraulic tank capacity shall not be less than 16.9 gallons (64.0 L).
Y___ N___	Standard engine oil capacity shall not be less than 7.9 gallons (30.0 L).
Y___ N___	Standard tandem housing capacity shall not be less than 20.0 gallons (76.0 L) each.
Y___ N___	Standard front wheel spindle bearing housing capacity shall not be less than 0.13 gallons (0.5 L).
Y___ N___	Standard circle drive housing capacity shall not be less than 1.8 gallons (7 L).
Y___ N___	Standard DEF tank capacity shall not be less than 5.8 gallons (22 L).



**MOTOR GRADERS****BID SPECIFICATION FOR 140M3 OR EQUIVALENT****SAFETY AND ENVIRONMENTAL**

- Y\_\_\_ N\_\_\_ A circle drive slip clutch shall be provided to reduce horizontal moldboard impact damage.
- Y\_\_\_ N\_\_\_ Black glare-reducing paint shall be used on the front frame and engine enclosure to decrease glare from other equipment lights and reflection from the sun and snow.
- Y\_\_\_ N\_\_\_ Operator not present monitoring system will lockout implements, shall not allow gear shift out of neutral, and lock parking brake if system detects operator not present for increased safety.
- Y\_\_\_ N\_\_\_ Hydraulic implement lockout shall be achieved by actuating a single electrical switch within the operator station.
- Y\_\_\_ N\_\_\_ An external emergency kill switch shall be available for ground level engine shut down.
- Y\_\_\_ N\_\_\_ Secondary, electric steering pump with redundant wiring shall be provided as a backup to the primary implement hydraulic pump.
- Y\_\_\_ N\_\_\_ Machine shall have laminated glass for the front windows and doors, to protect the operator from shattered glass.
- Y\_\_\_ N\_\_\_ Machine shall provide dual exits allowing for emergency egress should one side become obstructed.
- Y\_\_\_ N\_\_\_ Electrical system shall have a master disconnect switch with a removable key and lock for added safety. (in addition to the ignition switch).
- Y\_\_\_ N\_\_\_ Machine shall have a steering software system shall automatically reduce steering sensitivity as the ground speed increases.
- Y\_\_\_ N\_\_\_ Machine shall have back-up lights and sounding alarm when reverse gears are selected.
- Y\_\_\_ N\_\_\_ Environmentally friendly drain valves shall be provided for the hydraulic oil, engine oil, engine coolant, transmission, differential and fuel tank.
- Y\_\_\_ N\_\_\_ Cooling fan shall have both a shroud and rear grill for protection during service.
- Y\_\_\_ N\_\_\_ Machine shall allow cab interior and exterior lights to remain on separate from ignition switch, for safe exit of the machine during night operation.
- Y\_\_\_ N\_\_\_ Engine and transmission shall be rubber isolation mounted to reduce noise and vibration.

**SAFETY AND ENVIRONMENTAL-OPTIONAL ATTACHMENTS**

- Y\_\_\_ N\_\_\_ A guard shall be available to protect the machine's transmission from debris.
- Y\_\_\_ N\_\_\_ Rear vision camera with integrated display and wiring shall be available.
- Y\_\_\_ N\_\_\_ Blade lift accumulators shall be available as an option, to reduce vertical impact damage.
- Y\_\_\_ N\_\_\_ Drop down rear lights (stop/turn signal lights) shall be available to span the profile of the machine for increased safety.
- Y\_\_\_ N\_\_\_ Outside mounted mirrors (optional heated) shall be available.
- Y\_\_\_ N\_\_\_ A engine compartment light shall be available
- Y\_\_\_ N\_\_\_ A seatbelt indicator sensor and light shall be available

**ADDITIONAL FEATURES**

- Y\_\_\_ N\_\_\_ Rear ripper shall have 5 ripper shank holders and 9 scarifier shank holders.
- Y\_\_\_ N\_\_\_ Rear ripper shall have a working penetration of maximum 16.8 in (428 mm) and a penetration force of at least 20,693 lb (9386 kg).
- Y\_\_\_ N\_\_\_ Rear fenders shall meet ISO-3457 requirements and shall not interfere with the ability to fully open any cab/engine enclosure or service access doors.
- Y\_\_\_ N\_\_\_ All core machine systems shall be electronically connected optimizing performance and preventing machine damage.
- Y\_\_\_ N\_\_\_ Machine shall have no drive shafts that cross over the articulation hitch.

**OPTIONAL ATTACHMENTS**



<b>MOTOR GRADERS</b>	
<b>BID SPECIFICATION FOR 140M3 OR EQUIVALENT</b>	
Y____ N____	An integrated communication tool providing flow of vital machine data and location shall be available. This system shall give automatic updates on machine parameters such as machine hours, machine condition, location, fault codes and alarms.
Y____ N____	Machine shall have a engine coolant circulating heater available.
Y____ N____	Machine shall have a transmission solenoid valve guard available.
Y____ N____	A front scarifier and mid-mount scarifier shall be available.
Y____ N____	A front lift group shall be available .
Y____ N____	A rear ripper/scarifier shall be available.
Y____ N____	A snow wing frame ready option shall be available.
Bid specs are intended for use by North American buyers only and are subject to change. Model configuration may change depending on country of use. Please contact your local Caterpillar dealer for the most up-to-date specifications for your area.	



Effective with sales to the first user on or after November 1, 2010

# CATERPILLAR LIMITED WARRANTY

## For Selected Machine Models Designated by Caterpillar With 12 Month/Unlimited Hour Warranty

### Worldwide

Caterpillar Inc. or any of its subsidiaries ("Caterpillar") warrants the following products sold by it to be free from defects in material and workmanship:

This warranty does not apply to new replacement engines.

This warranty does not apply to selected models or new replacement engines designated by Caterpillar in India and China.

(In other areas different warranties may apply. Copies of applicable warranties may be obtained by writing to Caterpillar Inc., 100 N.E. Adams St., Peoria, IL 61629.)

- New earthmoving, construction, material handling, forestry product, paving product, compact wheel loader, mini hydraulic excavator, skid steer loader, multi terrain loader, and compact track loader machines designated by Caterpillar as having 12 -months/unlimited hour warranty. See your Cat dealer for a complete listing of covered models.

- Attachments/work tools installed on such machines prior to delivery (unless covered by the Cat Work Tool Warranty statement or another manufacturer's warranty). Hammer tool points and compacting plates used on hydraulic hammers are not warranted.

An additional warranty against breakage is applicable to certain Cat ground engaging tools. An additional warranty against wear is applicable to all landfill compactor tips when used in residential waste landfills. Refer to the applicable warranty statements for coverage detail.

This warranty does not apply to Cat batteries, Mobil-trac belts, rubber tracks used on multi terrain loaders, compact track loaders, and mini hydraulic excavators, or Cat Work Tools, which are covered by other Caterpillar warranties.

This warranty is subject to the following:

#### Warranty Period

For new machines and work tools/attachments the warranty period is 12-months/unlimited hours, starting from date of delivery to the first user.

Note: For hydraulic line's quick connect/disconnect components sold on compact wheel loaders, mini hydraulic excavators, skid steer loaders, multi terrain loaders, and compact track loader machines, the warranty period is 50 hours starting from the date of delivery to the first user.

#### Caterpillar Responsibilities

If a defect in material or workmanship is found during the warranty period, Caterpillar will, during normal working hours and at a place of business of a Cat dealer or other source approved by Caterpillar:

- Provide (at Caterpillar's choice) new, remanufactured, or Caterpillar approved repaired parts or assembled components needed to correct the defect.

Note: New, remanufactured, or Caterpillar approved replacement parts provided under the terms of this warranty are warranted for the remainder of the warranty period applicable to the product in which installed as if such parts were original components of that product. Items replaced under this warranty become the property of Caterpillar.

- Replace lubricating oil, filters, antifreeze, and other service items made unusable by the defect.

- Provide reasonable and customary labor needed to correct the defect, except in the case of a new replacement engine originally installed by other than a Cat dealer or source approved by Caterpillar. In this

case, labor is limited to repair only, and removal and installation is the user's responsibility.

#### User Responsibilities

The user is responsible for:

- Providing proof of delivery date to the first user.
- Labor costs, except as stated under "Caterpillar Responsibilities."
- Transportation costs, except as stated under "Caterpillar Responsibilities."
- Premium or overtime labor costs.
- Parts shipping charges in excess of those, that are considered usual and customary.
- Local taxes, if applicable.
- Costs to investigate complaints, unless the problem is caused by a defect in Caterpillar material or workmanship.

- Giving timely notice of a warrantable failure and promptly making the product available for repair.

- Performance of the required maintenance (including use of proper fuel, oil, lubricants, and coolant) and items replaced due to normal wear and tear.

- Allowing Caterpillar access to all electronically stored data.

(continued on the reverse side...)



## Limitations

Caterpillar is not responsible for:

- Failures resulting from any use or installation that Caterpillar judges improper.

- Failures resulting from attachments, accessory items, and parts not sold or approved by Caterpillar.

- Failures resulting from abuse, neglect, and/or improper repair.

- Failures resulting from user's delay in making the product available after being notified of a potential product problem.

- Failures resulting from unauthorized repair or adjustments, and unauthorized fuel setting changes.

*For products operating outside of Australia, Fiji, Nauru, New Caledonia, New Zealand, Papua New Guinea, the Solomon Islands, and Tahiti, the following is applicable:*

NEITHER THE FOREGOING EXPRESS WARRANTY NOR ANY OTHER WARRANTY BY CATERPILLAR, EXPRESS OR IMPLIED, IS APPLICABLE TO ANY ITEM CATERPILLAR SELLS THAT IS WARRANTED DIRECTLY TO THE USER BY ITS MANUFACTURER.

THIS WARRANTY IS EXPRESSLY IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, EXCEPT CATERPILLAR EMISSION-RELATED COMPONENTS WARRANTY FOR NEW ENGINES, WHERE APPLICABLE. REMEDIES UNDER THIS WARRANTY ARE LIMITED TO THE PROVISION OF MATERIAL AND SERVICES, AS SPECIFIED HEREIN.

CATERPILLAR IS NOT RESPONSIBLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

CATERPILLAR EXCLUDES ALL LIABILITY FOR OR ARISING FROM ANY NEGLIGENCE ON ITS PART OR ON THE PART OF ANY OF ITS EMPLOYEES, AGENTS, OR REPRESENTATIVES IN RESPECT OF THE MANUFACTURE OR SUPPLY OF GOODS OR THE PROVISION OF SERVICES RELATING TO THE GOODS.

IF OTHERWISE APPLICABLE, THE VIENNA CONVENTION ON CONTRACTS FOR THE INTERNATIONAL SALE OF GOODS IS EXCLUDED IN ITS ENTIRETY.

*For products operating in Australia, Fiji, Nauru, New Caledonia, New Zealand, Papua New Guinea, the Solomon Islands, and Tahiti, the following is applicable:*

THIS WARRANTY IS IN ADDITION TO WARRANTIES AND CONDITIONS IMPLIED BY STATUTE AND OTHER STATUTORY RIGHTS AND OBLIGATIONS THAT BY ANY APPLICABLE LAW CANNOT BE EXCLUDED, RESTRICTED OR MODIFIED ("MANDATORY RIGHTS"). ALL OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED (BY STATUTE OR OTHERWISE), ARE EXCLUDED.

NEITHER THIS WARRANTY NOR ANY OTHER CONDITION OR WARRANTY BY CATERPILLAR, EXPRESS OR IMPLIED (SUBJECT ONLY TO THE MANDATORY RIGHTS), IS APPLICABLE TO ANY ITEM CATERPILLAR SELLS THAT IS WARRANTED DIRECTLY TO THE USER BY ITS MANUFACTURER.

TO THE EXTENT PERMITTED UNDER THE MANDATORY RIGHTS, IF CATERPILLAR IS THE SUPPLIER TO THE USER, CATERPILLAR'S LIABILITY SHALL BE LIMITED AT ITS OPTION TO (a) IN THE CASE OF SERVICES, THE SUPPLY OF THE SERVICES AGAIN OR THE PAYMENT OF THE COST OF HAVING THE SERVICES SUPPLIED AGAIN, AND (b) IN THE CASE OF GOODS, THE REPAIR OR REPLACEMENT OF THE GOODS, THE SUPPLY OF EQUIVALENT GOODS, THE PAYMENT OF THE COST OF SUCH REPAIR OR REPLACEMENT OR THE ACQUISITION OF EQUIVALENT GOODS.

CATERPILLAR EXCLUDES ALL LIABILITY FOR OR ARISING FROM ANY NEGLIGENCE ON ITS PART OR ON THE PART OF ANY OF ITS EMPLOYEES, AGENTS OR REPRESENTATIVES IN RESPECT OF THE MANUFACTURE OR SUPPLY OF GOODS OR THE PROVISION OF SERVICES RELATING TO THE GOODS.

CATERPILLAR IS NOT LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES UNLESS IMPOSED UNDER MANDATORY RIGHTS.

IF OTHERWISE APPLICABLE, THE VIENNA CONVENTION (CONTRACTS FOR THE INTERNATIONAL SALE OF GOODS) IS EXCLUDED IN ITS ENTIRETY.

This warranty covers every major component of the products. Claims under this warranty should be submitted to a place of business of a Cat dealer or other source approved by Caterpillar. For further information concerning either the location to submit claims or Caterpillar as the issuer of this warranty, write Caterpillar Inc., 100 N. E. Adams St., Peoria, IL USA 61629.



# CONTROL YOUR COSTS MINIMIZE YOUR RISKS

This plan safeguards your investments in new, used and rebuilt machines beyond the standard warranty period. It includes all parts and labor to protect you against failures caused by defects in materials and workmanship. With the Powertrain Equipment Protection Plan, you can increase the predictability of service and maintenance costs—and reduce unplanned downtime.

## WHAT WE DO

- Perform necessary inspections to confirm eligibility
- Install parts approved by Caterpillar on covered repairs
- Validate your enrollment in the program

## WHAT YOU DO

- Operate equipment according to the Cat Operation & Maintenance Manual (OMM)
- Have recommended preventive maintenance performed at intervals specified in the OMM
- Upon request, provide proof of preventive maintenance compliance (receipts, copies of work orders, invoices)
- Promptly provide the machine for repair in the event of a covered failure

## COVERED COMPONENTS

Engine - Internal Components  
Oil Cooler  
Manifolds  
Fan Motor  
Water Pump  
Fuel Injection Pumps  
Injectors  
Lift / Transfer Pump  
Senders / Solenoids / Sensors  
Thermostat  
Flywheel & Torque Converter  
Engine Oil Filter Mount  
Turbocharger  
AC Compressor / Condenser  
Electronic Control Modules  
Oil Hoses / Lines (non-hydrostatic)  
Cylinder Block  
Piston  
Piston Rings  
Piston & Connecting Rod  
Crankshaft, Main Bearings & Rod Bearings

Camshaft & Camshaft Bearings  
Timing / Accessory Gears  
Timing Chain / Belt  
Inlet / Exhaust Valve  
Valve Cover & Base  
Valve Spring & Guide  
Rocker Arm  
Rocker Shaft Assembly  
Push Rod  
Balancer  
Fuel Pump / Governor Drive  
Oil Pump  
Oil Pan Group  
Fan & Fan Drive

Transmissions  
Hydraulic Controls  
Transmission Oil Filter Base  
Transmission Gears  
Final Drives/Planetary  
Drive Shafts  
Transfer Case

Hydrostatic Pumps &  
Drive Motors  
Linkage / lines Connected to  
Hystat Pump  
Drive (pilot / eh) Control Valves  
Bevel and Transfer Case

Axles  
Axle Seals  
Final Drive & Wheel  
Final Drive Case / Bore  
Final Drive Chain  
Final Drive Gears  
Axle Shaft  
Drive Axle Oil Pump

Steering Clutch  
Steering Clutch & Brake Control Valve

Hydraulic Oil Coolers

## EXCLUSIONS

**If a component is not listed, it may not be included in the plan. Other exclusions include:**

- > Improper or abusive use of the machine
- > Lubricating oil, antifreeze, filters, consumables and other maintenance items replaced during the covered component repair, unless such items are rendered unusable by a covered component failure
- > Failures caused by normal wear-out
- > Freight charges for parts shipments
- > Travel time and mileage involved in getting to a job site
- > Hauling costs and / or retrieval costs
- > Overtime labor costs
- > Repair costs resulting from the failure of any non-covered components
- > Downtime loss
- > Equipment rental charges
- > Any incidental / consequential damages or costs incurred as a result of a covered component failure.
- > Modifications unless approved by Caterpillar

**Examples of covered and excluded components or items are listed here. The actual dealer contract will govern. For a complete list of included components and more information on Cat Equipment Protection Plans, contact your local Cat dealer.**





## Employment Eligibility Verification

Welcome  
Teresa Norton

User ID  
TMOF6402

Last Login  
09:22 AM - 01/06/2012 Log Out



Click any for help

[Home](#)

[My Cases](#)

[New Case](#)

[View Cases](#)

[Search Cases](#)

[My Profile](#)

[Edit Profile](#)

[Change Password](#)

[Change Security Questions](#)

[My Company](#)

[Edit Company Profile](#)

[Add New User](#)

[View Existing Users](#)

[Close Company Account](#)

[My Reports](#)

[View Reports](#)

[My Resources](#)

[View Essential Resources](#)

[Take Tutorial](#)

[View User Manual](#)

[Contact Us](#)

### Company Information

Company Name: Thompson Tractor Co., Inc.

[View / Edit](#)

Company ID Number: 47130

Doing Business As (DBA)  
Name:

DUNS Number:

#### Physical Location:

Address 1: 2401 Pinson Highway

Address 2:

City: Birmingham

State: AL

Zip Code: 35217

County: JEFFERSON

#### Mailing Address:

Address 1: P O. Box 10367

Address 2:

City: Birmingham

State: AL

Zip Code: 35202-0367

#### Additional Information:

Employer Identification Number: 630377478

Total Number of Employees: 1,000 to 2,499

Parent Organization:

Administrator:

Organization Designation:

Employer Category:

NAICS Code: 423 - MERCHANT WHOLESALERS, DURABLE GOODS

[View / Edit](#)

Total Hiring Sites: 40

[View / Edit](#)

Total Points of Contact: 3

[View / Edit](#)

[View IDIU](#)



**Request for Taxpayer  
Identification Number and Certification**

Give form to the  
requester. Do not  
send to the IRS.

Print or type  
See Specific Instructions on page 2.

Name (as shown on your income tax return)

Thompson Tractor Co., Inc. DBA Thompson Power Systems, Thompson Lift Truck Co.

Business name, if different from above

and The Cat Rent Store

Check appropriate box: ☐ Individual/Sole proprietor ☒ Corporation ☐ Partnership

☐ Limited liability company. Enter the tax classification (D=disregarded entity, C=corporation, P=partnership) ▶ .....

☐ Other (see instructions) ▶

☒ Exempt  
payee

Address (number, street, and apt. or suite no.)

P O Box 10367 2401 Pinson Hwy. Tarrant, AL 35217

City, state, and ZIP code

Birmingham, AL 35202-0367

List account number(s) here (optional)

Lockbox Remit To: P O Box 934065, Atlanta, GA 31193-4005

Requester's name and address (optional)

**Part I Taxpayer Identification Number (TIN)**

Enter your TIN in the appropriate box. The TIN provided must match the name given on Line 1 to avoid backup withholding. For individuals, this is your social security number (SSN). However, for a resident alien, sole proprietor, or disregarded entity, see the Part I Instructions on page 3. For other entities, it is your employer identification number (EIN). If you do not have a number, see *How to get a TIN* on page 3.

Note. If the account is in more than one name, see the chart on page 4 for guidelines on whose number to enter.

Social security number

or

Employer identification number

63 : 0377478

**Part II Certification**

Under penalties of perjury, I certify that:

1. The number shown on this form is my correct taxpayer identification number (or I am waiting for a number to be issued to me), and
2. I am not subject to backup withholding because: (a) I am exempt from backup withholding, or (b) I have not been notified by the Internal Revenue Service (IRS) that I am subject to backup withholding as a result of a failure to report all interest or dividends, or (c) the IRS has notified me that I am no longer subject to backup withholding, and
3. I am a U.S. citizen or other U.S. person (defined below).

**Certification Instructions.** You must cross out item 2 above if you have been notified by the IRS that you are currently subject to backup withholding because you have failed to report all interest and dividends on your tax return. For real estate transactions, item 2 does not apply. For mortgage interest paid, acquisition or abandonment of secured property, cancellation of debt, contributions to an individual retirement arrangement (IRA), and generally, payments other than interest and dividends, you are not required to sign the Certification, but you must provide your correct TIN. See the Instructions on page 4.

Sign  
Here

Signature of  
U.S. person ▶

*Linda L. Duncan, Controller*

Date ▶

**General Instructions**

Section references are to the Internal Revenue Code unless otherwise noted.

**Purpose of Form**

A person who is required to file an information return with the IRS must obtain your correct taxpayer identification number (TIN) to report, for example, income paid to you, real estate transactions, mortgage interest you paid, acquisition or abandonment of secured property, cancellation of debt, or contributions you made to an IRA.

Use Form W-9 only if you are a U.S. person (including a resident alien), to provide your correct TIN to the person requesting it (the requester) and, when applicable, to:

1. Certify that the TIN you are giving is correct (or you are waiting for a number to be issued),
2. Certify that you are not subject to backup withholding, or
3. Claim exemption from backup withholding if you are a U.S. exempt payee. If applicable, you are also certifying that as a U.S. person, your allocable share of any partnership income from a U.S. trade or business is not subject to the withholding tax on foreign partners' share of effectively connected income.

Note. If a requester gives you a form other than Form W-9 to request your TIN, you must use the requester's form if it is substantially similar to this Form W-9.

**Definition of a U.S. person.** For federal tax purposes, you are considered a U.S. person if you are:

- An individual who is a U.S. citizen or U.S. resident alien,
- A partnership, corporation, company, or association created or organized in the United States or under the laws of the United States,
- An estate (other than a foreign estate), or
- A domestic trust (as defined in Regulations section 301.7701-7).

**Special rules for partnerships.** Partnerships that conduct a trade or business in the United States are generally required to pay a withholding tax on any foreign partners' share of income from such business. Further, in certain cases where a Form W-9 has not been received, a partnership is required to presume that a partner is a foreign person, and pay the withholding tax. Therefore, if you are a U.S. person that is a partner in a partnership conducting a trade or business in the United States, provide Form W-9 to the partnership to establish your U.S. status and avoid withholding on your share of partnership income.

The person who gives Form W-9 to the partnership for purposes of establishing its U.S. status and avoiding withholding on its allocable share of net income from the partnership conducting a trade or business in the United States is in the following cases:

- The U.S. owner of a disregarded entity and not the entity.



Company ID Number: 47130

THE E-VERIFY PROGRAM FOR EMPLOYMENT VERIFICATION

MEMORANDUM OF UNDERSTANDING

**ARTICLE I**

**PURPOSE AND AUTHORITY**

This Memorandum of Understanding (MOU) sets forth the points of agreement between the Social Security Administration (SSA), the Department of Homeland Security (DHS) and Thompson Tractor Co., Inc. (Employer) regarding the Employer's participation in the Employment Eligibility Verification Program (E-Verify). E-Verify is a program in which the employment eligibility of all newly hired employees will be confirmed after the Employment Eligibility Verification Form (Form I-9) has been completed.

Authority for the E-Verify program is found in Title IV, Subtitle A, of the Illegal Immigration Reform and Immigrant Responsibility Act of 1996 (IIRIRA), Pub. L. 104-208, 110 Stat. 3009, as amended (8 U.S.C. § 1324a note).

**ARTICLE II**

**FUNCTIONS TO BE PERFORMED**

**A. RESPONSIBILITIES OF THE SSA**

1. Upon completion of the Form I-9 by the employee and the Employer, and provided the Employer complies with the requirements of this MOU, SSA agrees to provide the Employer with available information that allows the Employer to confirm the accuracy of Social Security Numbers provided by all newly hired employees and the employment authorization of U.S. citizens.
2. The SSA agrees to provide to the Employer appropriate assistance with operational problems that may arise during the Employer's participation in the E-Verify program. The SSA agrees to provide the Employer with names, titles, addresses, and telephone numbers of SSA representatives to be contacted during the E-Verify process.
3. The SSA agrees to safeguard the information provided by the Employer through the E-Verify program procedures, and to limit access to such information, as is appropriate by law, to individuals responsible for the verification of Social Security Numbers and for evaluation of the E-Verify program or such other persons or entities who may be authorized by the SSA as governed by the Privacy Act (5 U.S.C. § 552a), the Social Security Act (42 U.S.C. 1306(a)), and SSA regulations (20 CFR Part 401).
4. SSA agrees to establish a means of automated verification that is designed (in conjunction with DHS's automated system if necessary) to provide confirmation or tentative nonconfirmation of U.S. citizens' employment eligibility and accuracy of SSA records for both citizens and aliens within 3 Federal Government work days of the initial inquiry.



Company ID Number: 47130

5. SSA agrees to establish a means of secondary verification (including updating SSA records as may be necessary) for employees who contest SSA tentative nonconfirmations that is designed to provide final confirmation or nonconfirmation of U.S. citizens' employment eligibility and accuracy of SSA records for both citizens and aliens within 10 Federal Government work days of the date of referral to SSA, unless SSA determines that more than 10 days may be necessary. In such cases, SSA will provide additional verification instructions.

**B. RESPONSIBILITIES OF THE DEPARTMENT OF HOMELAND SECURITY**

1. Upon completion of the Form I-9 by the employee and the Employer and after SSA verifies the accuracy of SSA records for aliens through E-Verify, DHS agrees to provide the Employer access to selected data from DHS's database to enable the Employer to conduct:

- Automated verification checks on newly hired alien employees by electronic means, and
- Photo verification checks (when available) on newly hired alien employees.

2. DHS agrees to provide to the Employer appropriate assistance with operational problems that may arise during the Employer's participation in the E-Verify program. DHS agrees to provide the Employer names, titles, addresses, and telephone numbers of DHS representatives to be contacted during the E-Verify process.

3. DHS agrees to provide to the Employer a manual (the E-Verify Manual) containing instructions on E-Verify policies, procedures and requirements for both SSA and DHS, including restrictions on the use of E-Verify.. DHS agrees to provide training materials on E-Verify.

4. DHS agrees to provide to the Employer a notice, which indicates the Employer's participation in the E-Verify program. DHS also agrees to provide to the Employer anti-discrimination notices issued by the Office of Special Counsel for Immigration-Related Unfair Employment Practices (OSC), Civil Rights Division, and U.S. Department of Justice.

5. DHS agrees to issue the Employer a user identification number and password that permits the Employer to verify information provided by alien employees with DHS's database.

6. DHS agrees to safeguard the information provided to DHS by the Employer, and to limit access to such information to individuals responsible for the verification of alien employment eligibility and for evaluation of the E-Verify program, or to such other persons or entities as may be authorized by applicable law. Information will be used only to verify the accuracy of Social Security Numbers and employment eligibility, to enforce the Immigration and Nationality Act and federal criminal laws, and to ensure accurate wage reports to the SSA.

7. DHS agrees to establish a means of automated verification that is designed (in conjunction with SSA verification procedures) to provide confirmation or tentative nonconfirmation of employees' employment eligibility within 3 Federal Government work days of the initial inquiry.



Company ID Number: 47130

8. DHS agrees to establish a means of secondary verification (including updating DHS records as may be necessary) for employees who contest DHS tentative nonconfirmations and photo non-match tentative nonconfirmations that is designed to provide final confirmation or nonconfirmation of the employees' employment eligibility within 10 Federal Government work days of the date of referral to DHS, unless DHS determines that more than 10 days may be necessary. In such cases, DHS will provide additional verification instructions.

**C. RESPONSIBILITIES OF THE EMPLOYER**

1. The Employer agrees to display the notices supplied by DHS in a prominent place that is clearly visible to prospective employees.

2. The Employer agrees to provide to the SSA and DHS the names, titles, addresses, and telephone numbers of the Employer representatives to be contacted regarding E-Verify.

3. The Employer agrees to become familiar with and comply with the E-Verify Manual.

4. The Employer agrees that any Employer Representative who will perform employment verification queries will complete the E-Verify Tutorial before that individual initiates any queries.

A. The employer agrees that all employer representatives will take the refresher tutorials initiated by the E-Verify program as a condition of continued use of E-Verify.

B. Failure to complete a refresher tutorial will prevent the employer from continued use of the program.

5. The Employer agrees to comply with established Form I-9 procedures, with two exceptions:

- If an employee presents a "List B" identity document, the Employer agrees to only accept "List B" documents that contain a photo. (List B documents identified in 8 C.F.R. § 274a.2 (b) (1) (B)) can be presented during the Form I-9 process to establish identity).
- If an employee presents a DHS Form I-551 (Permanent Resident Card) or Form I-766 (Employment Authorization Document) to complete the Form I-9, the Employer agrees to make a photocopy of the document and to retain the photocopy with the employee's Form I-9. The employer will use the photocopy to verify the photo and to assist the Department with its review of photo non-matches that are contested by employees. Note that employees retain the right to present any List A, or List B and List C, documentation to complete the Form I-9. DHS may in the future designate other documents that activate the photo screening tool.

6. The Employer understands that participation in E-Verify does not exempt the Employer from the responsibility to complete, retain, and make available for inspection Forms I-9 that relate to its employees, or from other requirements of applicable regulations or laws, except for the following modified requirements applicable by reason of the Employer's participation in E-Verify: (1) identity documents must have photos, as described in paragraph 5 above; (2) a



Company ID Number: 47130

rebuttable presumption is established that the Employer has not violated section 274A(a)(1)(A) of the Immigration and Nationality Act (INA) with respect to the hiring of any individual if it obtains confirmation of the identity and employment eligibility of the individual in compliance with the terms and conditions of E-Verify ; (3) the Employer must notify DHS if it continues to employ any employee after receiving a final nonconfirmation, and is subject to a civil money penalty between \$500 and \$1,000 for each failure to notify DHS of continued employment following a final nonconfirmation; (4) the Employer is subject to a rebuttable presumption that it has knowingly employed an unauthorized alien in violation of section 274A(a)(1)(A) if the Employer continues to employ any employee after receiving a final nonconfirmation; and (5) no person or entity participating in E-Verify is civilly or criminally liable under any law for any action taken in good faith on information provided through the confirmation system. DHS reserves the right to conduct Form I-9 compliance inspections during the course of E-Verify, as well as to conduct any other enforcement activity authorized by law.

7. The Employer agrees to initiate E-Verify verification procedures within 3 Employer business days after each employee has been hired (but after both sections 1 and 2 of the Form I-9 have been completed), and to complete as many (but only as many) steps of the E-Verify process as are necessary according to the E-Verify Manual. The Employer is prohibited from initiating verification procedures before the employee has been hired and the Form I-9 completed. If the automated system to be queried is temporarily unavailable, the 3-day time period is extended until it is again operational in order to accommodate the Employer's attempting, in good faith, to make inquiries during the period of unavailability. In all cases, the Employer must use the SSA verification procedures first, and use DHS verification procedures and photo screening tool only after the the SSA verification response has been given.

8. The Employer agrees not to use E-Verify procedures for pre-employment screening of job applicants, support for any unlawful employment practice, or any other use not authorized by this MOU. The Employer must use E-Verify for all new employees and will not verify only certain employees selectively. The Employer agrees not to use E-Verify procedures for re-verification, or for employees hired before the date this MOU is in effect. The Employer understands that if the Employer uses E-Verify procedures for any purpose other than as authorized by this MOU, the Employer may be subject to appropriate legal action and the immediate termination of its access to SSA and DHS information pursuant to this MOU.

9. The Employer agrees to follow appropriate procedures (see Article III.B. below) regarding tentative nonconfirmations, including notifying employees of the finding, providing written referral instructions to employees, allowing employees to contest the finding, and not taking adverse action against employees if they choose to contest the finding. Further, when employees contest a tentative nonconfirmation based upon a photo non-match, the Employer is required to take affirmative steps (see Article III.B. below) to contact DHS with information necessary to resolve the challenge.

10. The Employer agrees not to take any adverse action against an employee based upon the employee's employment eligibility status while SSA or DHS is processing the verification request unless the Employer obtains knowledge (as defined in 8 C.F.R. § 274a.1 (l)) that the employee is not work authorized. The Employer understands that an initial inability of the SSA or DHS automated verification to verify work authorization, a tentative nonconfirmation, or the finding of



Company ID Number: 47130

a photo non-match, does not mean, and should not be interpreted as, an indication that the employee is not work authorized. In any of the cases listed above, the employee must be provided the opportunity to contest the finding, and if he or she does so, may not be terminated or suffer any adverse employment consequences until and unless secondary verification by SSA or DHS has been completed and a final nonconfirmation has been issued. If the employee does not choose to contest a tentative nonconfirmation or a photo non-match, then the Employer can find the employee is not work authorized and take the appropriate action.

11. The Employer agrees to comply with section 274B of the INA by not discriminating unlawfully against any individual in hiring, firing, or recruitment or referral practices because of his or her national origin or, in the case of a protected individual as defined in section 274B(a)(3) of the INA, because of his or her citizenship status. The Employer understands that such illegal practices can include selective verification or use of E-Verify, discharging or refusing to hire eligible employees because they appear or sound "foreign", and premature termination of employees based upon tentative nonconfirmations, and that any violation of the unfair immigration-related employment practices provisions of the INA could subject the Employer to civil penalties pursuant to section 274B of the INA and the termination of its participation in E-Verify. If the Employer has any questions relating to the anti-discrimination provision, it should contact OSC at 1-800-255-7688 or 1-800-237-2515 (TDD).

12. The Employer agrees to record the case verification number on the employee's Form I-9 or to print the screen containing the case verification number and attach it to the employee's Form I-9.

13. The Employer agrees that it will use the information it receives from the SSA or DHS pursuant to E-Verify and this MOU only to confirm the employment eligibility of newly-hired employees after completion of the Form I-9. The Employer agrees that it will safeguard this information, and means of access to it (such as PINS and passwords) to ensure that it is not used for any other purpose and as necessary to protect its confidentiality, including ensuring that it is not disseminated to any person other than employees of the Employer who are authorized to perform the Employer's responsibilities under this MOU.

14. The Employer acknowledges that the information which it receives from SSA is governed by the Privacy Act (5 U.S.C. § 552a (i) (1) and (3)) and the Social Security Act (42 U.S.C. 1306(a)), and that any person who obtains this information under false pretenses or uses it for any purpose other than as provided for in this MOU may be subject to criminal penalties.

15. The Employer agrees to allow DHS and SSA, or their authorized agents or designees, to make periodic visits to the Employer for the purpose of reviewing E-Verify -related records, i.e., Forms I-9, SSA Transaction Records, and DHS verification records, which were created during the Employer's participation in the E-Verify Program. In addition, for the purpose of evaluating E-Verify, the Employer agrees to allow DHS and SSA or their authorized agents or designees, to interview it regarding its experience with E-Verify, to interview employees hired during E-Verify use concerning their experience with the pilot, and to make employment and E-Verify related records available to DHS and the SSA, or their designated agents or designees. Failure to comply with the terms of this paragraph may lead DHS to terminate the Employer's access to E-Verify.



Company ID Number: 47130

### **ARTICLE III**

#### **REFERRAL OF INDIVIDUALS TO THE SSA AND THE DEPARTMENT OF HOMELAND SECURITY**

##### **A. REFERRAL TO THE SSA**

1. If the Employer receives a tentative nonconfirmation issued by SSA, the Employer must print the tentative nonconfirmation notice as directed by the automated system and provide it to the employee so that the employee may determine whether he or she will contest the tentative nonconfirmation.
2. The Employer will refer employees to SSA field offices only as directed by the automated system based on a tentative nonconfirmation, and only after the Employer records the case verification number, reviews the input to detect any transaction errors, and determines that the employee contests the tentative nonconfirmation. The Employer will transmit the Social Security Number to SSA for verification again if this review indicates a need to do so. The Employer will determine whether the employee contests the tentative nonconfirmation as soon as possible after the Employer receives it.
3. If the employee contests an SSA tentative nonconfirmation, the Employer will provide the employee with a referral letter and instruct the employee to visit an SSA office to resolve the discrepancy within 8 Federal Government work days. The Employer will make a second inquiry to the SSA database using E-Verify procedures on the date that is 10 Federal Government work days after the date of the referral in order to obtain confirmation, or final nonconfirmation, unless otherwise instructed by SSA or unless SSA determines that more than 10 days is necessary to resolve the tentative nonconfirmation..
4. The Employer agrees not to ask the employee to obtain a printout from the Social Security Number database (the Numident) or other written verification of the Social Security Number from the SSA.

##### **B. REFERRAL TO THE DEPARTMENT OF HOMELAND SECURITY**

1. If the Employer receives a tentative nonconfirmation issued by DHS, the Employer must print the tentative nonconfirmation notice as directed by the automated system and provide it to the employee so that the employee may determine whether he or she will contest the tentative nonconfirmation.
2. If the Employer finds a photo non-match for an alien who provides a document for which the automated system has transmitted a photo, the employer must print the photo non-match tentative nonconfirmation notice as directed by the automated system and provide it to the employee so that the employee may determine whether he or she will contest the finding.
3. The Employer agrees to refer individuals to DHS only when the employee chooses to contest a tentative nonconfirmation received from DHS automated verification process or when



Company ID Number: 47130

the Employer issues a tentative nonconfirmation based upon a photo non-match. The Employer will determine whether the employee contests the tentative nonconfirmation as soon as possible after the Employer receives it.

4. If the employee contests a tentative nonconfirmation issued by DHS, the Employer will provide the employee with a referral letter and instruct the employee to contact the Department through its toll-free hotline within 8 Federal Government work days.

5. If the employee contests a tentative nonconfirmation based upon a photo non-match, the Employer will provide the employee with a referral letter to DHS. DHS will electronically transmit the result of the referral to the Employer within 10 Federal Government work days of the referral unless it determines that more than 10 days is necessary.

6. The Employer agrees that if an employee contests a tentative nonconfirmation based upon a photo non-match, the Employer will send a copy of the employee's Form I-551 or Form I-766 to DHS for review by:

- Scanning and uploading the document, or
- Sending a photocopy of the document by an express mail account (furnished and paid for by DHS).

7. The Employer understands that if it cannot determine whether there is a photo match/non-match, the Employer is required to forward the employee's documentation to DHS by scanning and uploading, or by sending the document as described in the preceding paragraph, and resolving the case as specified by the Immigration Services Verifier at DHS who will determine the photo match or non-match.

#### ARTICLE IV

##### **SERVICE PROVISIONS**

The SSA and DHS will not charge the Employer for verification services performed under this MOU. The Employer is responsible for providing equipment needed to make inquiries. To access the E-Verify System, an Employer will need a personal computer with Internet access.

#### ARTICLE V

##### **PARTIES**

This MOU is effective upon the signature of all parties, and shall continue in effect for as long as the SSA and DHS conduct the E-Verify program unless modified in writing by the mutual consent of all parties, or terminated by any party upon 30 days prior written notice to the others. Any and all system enhancements to the E-Verify program by DHS or SSA, including but not limited to the E-Verify checking against additional data sources and instituting new verification procedures, will be covered under this MOU and will not cause the need for a supplemental MOU that outlines these changes. DHS agrees to train employers on all changes made to E-Verify through the use of mandatory refresher tutorials and updates to the E-Verify manual. Even



Company ID Number: 47130

without changes to E-Verify, the Department reserves the right to require employers to take mandatory refresher tutorials.

Termination by any party shall terminate the MOU as to all parties. The SSA or DHS may terminate this MOU without prior notice if deemed necessary because of the requirements of law or policy, or upon a determination by SSA or DHS that there has been a breach of system integrity or security by the Employer, or a failure on the part of the Employer to comply with established procedures or legal requirements. Some or all SSA and DHS responsibilities under this MOU may be performed by contractor(s), and SSA and DHS may adjust verification responsibilities between each other as they may determine.

Nothing in this MOU is intended, or should be construed, to create any right or benefit, substantive or procedural, enforceable at law by any third party against the United States, its agencies, officers, or employees, or against the Employer, its agents, officers, or employees.

Each party shall be solely responsible for defending any claim or action against it arising out of or related to E-Verify or this MOU, whether civil or criminal, and for any liability wherefrom, including (but not limited to) any dispute between the Employer and any other person or entity regarding the applicability of Section 403(d) of IIRIRA to any action taken or allegedly taken by the Employer.

The employer understands that the fact of its participation in E-Verify is not confidential information and may be disclosed as authorized or required by law and DHS or SSA policy, including but not limited to, Congressional oversight, E-Verify publicity and media inquiries, and responses to inquiries under the Freedom of Information Act (FOIA).

The foregoing constitutes the full agreement on this subject between the SSA, DHS, and the Employer.

The individuals whose signatures appear below represent that they are authorized to enter into this MOU on behalf of the Employer and DHS respectively.

**To be accepted as a participant in E-Verify, you should only sign the Employer's Section of the signature page. If you have any questions, contact E-Verify Operations at 888-464-4218.**

**Employer Thompson Tractor Co., Inc.**

**Frank M Wright**

Name (Please type or print)

Title

*Electronically Signed*

07/11/2007

Signature

Date

**Department of Homeland Security – Verification Division**



Company ID Number: 47130

**INFORMATION REQUIRED  
FOR THE E-VERIFY PROGRAM**

Information relating to your Company:

Company Name: Thompson Tractor Co., Inc.

Company Facility Address: 2401 Pinson Highway  
Birmingham, AL 35217

Company Alternate Address: P.O. Box 10367  
Birmingham, AL 35202-0367

County or Parish: JEFFERSON

Employer Identification Number: 630377478

North American Industry  
Classification Systems Code: 423

Parent Company: \_\_\_\_\_

Number of Employees: 1,000 to  
2,499      Number of Sites Verified for: 5

Are you verifying for more than 1 site? If yes, please provide the number of sites verified for in each State.

- GEORGIA      5 site(s)

Information relating to the Program Administrator(s) for your Company on policy questions or operational problems:

Name:	Kimberly A Stark		
Telephone Number:	(205) 849 - 4279	Fax Number:	(205) 849 - 4565
E-mail Address:	kimberlystark@thompsontractor.com		
Name:	Frank M Wright		
Telephone Number:	(205) 849 - 4267	Fax Number:	(205) 849 - 4854
E-mail Address:	frankwright@thompsontractor.com		



Company ID Number: 47130

**INFORMATION REQUIRED  
FOR THE E-VERIFY PROGRAM**

Information relating to your Company:

Company Name: Thompson Tractor Co., Inc.

Company Facility Address: 2401 Pinson Highway  
Birmingham, AL 35217

Company Alternate Address: P.O. Box 10367  
Birmingham, AL 35202-0367

County or Parish: JEFFERSON

Employer Identification Number: 630377478

North American Industry  
Classification Systems Code: 423

Parent Company: \_\_\_\_\_

Number of Employees: 1,000 to  
2,499      Number of Sites Verified for: 5

Are you verifying for more than 1 site? If yes, please provide the number of sites verified for in each State.

- GEORGIA      5 site(s)

Information relating to the Program Administrator(s) for your Company on policy questions or operational problems:

Name:	Kimberly A Stark	
Telephone Number:	(205) 849 - 4279	Fax Number: (205) 849 - 4565
E-mail Address:	kimberlystark@thompsontractor.com	
Name:	Frank M Wright	
Telephone Number:	(205) 849 - 4267	Fax Number: (205) 849 - 4854
E-mail Address:	frankwright@thompsontractor.com	



Company ID Number: 47130

**USCIS Verification Division**

Name (Please type or print)

Title

*Electronically Signed*

07/11/2007

Signature

Date