

BID SUBMITTAL FORM
Alabama County Joint Bid Program
BID ITEM – 3 CY WHEEL LOADER - OPTION C

Company Name: Gwin Equipment Company Inc.
Address: 4325 Northern Blvd
Montgomery AL 36110
Bid Submitted by: John Edwards
(Name of company representative)
Title: Governmental Sales Manager E-mail address: jedwards@gwin.com
Phone: 850-685-7055 Fax: 334-834-2272

By submitting this bid, we agree:

Initials

The equipment model number identified below meets the bid specs for this bid item

JE

That the bid price will be honored for all counties for the period from Jan. 1, 2022 to Dec. 31, 2022.

JE

The equipment will be delivered at the bid price to all counties participating in the joint bid program

JE

The company representative listed above will be the contact person for purchasing this bid item under the joint bid program

JE

The bid is accompanied by a current catalog or model specification document for the model number identified below

JE

The bid is accompanied by a copy of the manufacturer's standard warranty as required in the bid specifications

JE

The bid includes the e-verify documentation required by Alabama law

JE

If awarded the bid, a performance bond will be provided upon request

JE

The bid documents include the **Manufacturer's Suggested Retail Price Sheet (MSRP) for the Standard Machine**

JE

3 CY WHEEL LOADER - OPTION C

Total Bid Price for Standard Machine: \$ 158,285.⁰⁰
(Total Bid Price for Standard Machine Includes Freight Preparation, Delivery and Standard Warranty Costs)*

Freight Preparation and Delivery: \$ 1,500.⁰⁰
(Included in Standard Machine Bid Price)

Manufacturer's Suggested Retail Price for Standard Machine: \$ 204,404.⁰⁰

Equipment Model #: Volvo L70H

Description: 3 CY Wheel Loader

Signature of company representative submitting bid: John Edwards

Title: Governmental Sales Manager

* **NOTE:** Award will be made based on the total cost of the **Standard Machine**. The total cost of the standard machine is to include the freight preparation, delivery and standard warranty cost. Freight preparation, delivery will be excluded from the total bid price of the standard machine in determining the percentage discount for any available options.

**BID SUBMITTAL FORM: OPTION COST SHEET
3 CY WHEEL LOADER - OPTION C**

By submitting this bid, we agree:

To offer any available options at the percent difference between the Manufacturer's Suggested Retail Price Sheet and the actual bid price on the Standard Machine*

JE

The bid documents include the Manufacturer's Suggested Retail Price Sheet (MSRP) with **any available Options** for the Standard Machine

JE

Equipment Model #: Volvo L70H

Description: 3CY wheel loader

Signature of company representative submitting bid: John Edwards

Title: Governmental Sales Manager

***Note:** The percent difference between the **Manufacturer's Suggested Retail Price Sheet (MSRP)** for the standard machine as specified by these **Bid Specifications** and the actual price bid by the vendor will be calculated to determine the percentage discount to be applied to any available options. The bid price of the freight preparation, delivery cost shall be excluded in determining the percentage discount to be applied to available options. Any individual county may choose to add any available option to the standard machine at the percentage discount at the time of purchase.

BID SPECIFICATIONS FOR 3 CY WHEEL LOADER - OPTION C

GENERAL

These specifications shall be construed as the minimum acceptable standards for a 3-yard wheel loader. Should the manufacturer's current published data or specifications exceed these standards, the manufacturer's standards shall be considered minimum and shall be furnished. All integral parts not specifically mentioned in the scope of these specifications that are necessary to provide a complete working unit shall be furnished. Additionally, the machine offered for bid shall include all standard manufacturer's equipment. The wheel loader must be a new current production model and shall meet all EPA and other applicable standards at the time of manufacturer.

The use of specific names and numbers in the specification is not intended to restrict the bidder or any seller or manufacturer, but is intended solely for the purpose of indicating the type, size and quality of equipment considered best adapted to the uses of counties participating in this joint bid.

BID SUBMITTAL FORM

Each bidder must submit his or her bid on the Bid Submittal Form included in the Invitation to Bid package. All written warranties to be submitted shall be attached to the Bid Submittal Form.

BID PRICE

The bid price shall include all destination charges, delivery charges, title fees, rebates, and all other applicable costs and refunds.

MANUALS

Each unit shall be provided with one (1) copy of the operator's manual, one (1) copy of the repair manual and one (1) copy of the current parts manual. Units will not be accepted for delivery until the manuals as outlined above are received by the purchaser.

REPLACEMENT PARTS AVAILABILITY

Parts must be available for 5 years or 7,500 hours of use for the piece of equipment bid. If replacement parts are not delivered within three (3) working days of an order being placed, the bidder will deliver an equivalent machine for the county to use at no cost to the county until such time as the parts are delivered to the county so it can affect repairs on its machine.

WARRANTY

Bidders shall submit a copy of the manufacturer's standard warranty. Warranty shall include service response time of maximum of 36 hours within notification by county.

Yes ☒ No ☐
Page # or
Attachment ☒

DUMP CLEARANCE

The wheel loader dump clearance shall be no less than 10' 4" at full height and 45 degree dump angle with a double arm Z bar configuration

Yes ☒ No ☐
Page # 19

STEERING

The wheel loader shall have a 40-degree full turn articulation steering angle both right and left of center.

Yes ☒ No ☐
Page # 22

OPERATOR STATION

Cab shall be designed and built by the loader manufacturer.

Yes ☒ No ☐
Page # 25

Cab shall be enclosed and equipped with heater, air conditioner

Yes ☒ No ☐
Page # 26

Loader shall meet ROPS/FOPS regulations standard in North America.

Yes ☒ No ☐
Page # 25

Loader shall have easy to read gauges, gear selection, direction and RPM readings.

Yes ☒ No ☐
Page # 9, 24

Loader shall have a standard hydraulic joystick which controls both lift and tilt functions. A remote transmission control switch on joystick to be standard.

Yes ☒ No ☐
Page # 25

Loader shall have fully adjustable, air suspension seat.
Loader shall be equipped with a Fire Extinguisher

Yes ☒ No ☐
Page # 26

Loader shall have retractable 3" seat belt.

Yes ☒ No ☐
Page # 26

POWERTRAIN

Engine must have a minimum of **six (6)** cylinders and turbocharged and **designed and manufactured by machine manufacturer.**

Yes ☒ No ☐
Page # 16

The loader shall be equipped with crankcase and powertrain guards.

Yes ☒ No ☐
Page # 26

All powertrain components shall be designed and built by loader manufacturer.

Yes ☒ No ☐
Page # 16, 17

The engine shall have a minimum net HP of **170** at 1800 RPM with a minimum displacement of **348** cubic inches and **629** lbs. /ft. torque.

Yes ☒ No ☐
Page # 16

The engine shall meet all Tier 4/final emission requirements

Yes ☒ No ☐
Page # 16

Loader shall have electronic module to control engine timing and monitoring of vital engine systems.

Yes ☒ No ☐
Page # 16

Loader shall have fixed front axle with locking differential and oscillating rear axle ($\pm 13^\circ$) with open differential.

Yes ☒ No ☐
Page # 17

Loader shall have fully enclosed, adjustment free oil-disc brakes.

Yes ☒ No ☐
Page # 17

Unit shall be equipped with 20.5 R25 L3 XHA tires.

Yes ☒ No ☐
Page # 17

Loader shall have powershift transmission designed and built by manufacturer.
The loader shall have at minimum 4-forward/4 reverse with a minimum travel speed forward of 28 mph and reverse of 28 mph.

Yes ☒ No ☐
Page # 17

Loader shall have computer-controlled modulation for smoother shifting.

Yes ☒ No ☐
Page # 17

Loader shall have manual shifting as well as auto shifting options. Auto shift will have full throttle (aggressive operation) and variable shift (economy mode) options.

Yes ☒ No ☐
Page # 17

INSTRUMENTATION

The wheel loader shall include the following gauges: hour meter, fuel, transmission or torque converter oil temperature and engine coolant temperature.

Yes ☒ No ☐
Page # 17

The wheel loader shall also include the following indicator lights: battery charge, engine oil pressure, low coolant level, parking brake warning, and low brake pressure.

Yes ☒ No ☐
Page # 17, 24

HYDRAULIC SYSTEM:

Shall have a minimum flow of 40 gallons/minute.

Yes ☒ No ☐
Page # 18

WORK TOOLS

Bucket shall be designed and built by the loader manufacturer.

Yes ☒ No ☐
Page # 27

Bucket shall be in 3.0 CYD capacity (with bolt-on cutting edges and teeth).

Yes ☒ No ☐
Page # 22

SERVICEABILITY

All daily service points shall be accessible from the ground level and shall have sight gauges for radiator coolant, hydraulic oil and transmission oil.

All filters shall be vertically mounted and spin-on for ease of service and to prevent spilling during service.

Yes ☒ No ☐
Page # 14, 24

GENERAL

Unit shall be equipped with vandalism protection with locking service ports, cushioned steering stops, front fenders, and toolbox in addition to all other Standard equipment

Yes ☒ No ☐
Page # 25

OPERATING WEIGHT AND LIFT CAPACITIES

Unit shall be minimum of **30,800** lbs. operating and proper ballasting for **3.0** cubic yard bucket and 20.5-25 radial (L-3) tires.

Yes ☒ No ☐
Page # 22

Straight static tipping load shall be a minimum of **21,450** lbs.

Yes ☒ No ☐
Page # 22

Full turn (40°) static tipping load shall be a minimum of **18,500** lbs.

Yes ☒ No ☐
Page # 22

Breakout force shall be a minimum of **19,700** lbs.

Yes ☒ No ☐
Page # 22

INVITATION TO BID

HEAVY EQUIPMENT

NOTICE OF BID OPENING

NOTICE IS HEREBY GIVEN that the Association of County Commissions of Alabama, which administers the Alabama County Joint Bid Program on behalf of Alabama's county governing bodies, shall receive and open bids for the purchase of zero (0) or more items of heavy road equipment at its office located at 2 North Jackson Street, Montgomery, Alabama, at **10:00 a.m. on Friday, October 22, 2021**. Bid specifications are available at <http://www.alabamacounties.org/heavy-equipment/> for each of the following items:

Asphalt Milling Attachments	125 HP Heavy Duty Hydrostatic Bulldozer – Option A
Light Duty Backhoe	125 HP Heavy Duty Hydrostatic Bulldozer – Option B
Medium Duty Backhoe	Mulching Dozer
Heavy Duty Backhoe Option A	3 CY Wheel Loader Option A
Heavy Duty Backhoe Option C	3 CY Wheel Loader Option B
85 PTO Tractor Option A	3 CY Wheel Loader Option C
85 PTO Tractor Option B	3.65 CY Wheel Loader Option A
95 PTO Tractor Option A	3.65 CY Wheel Loader Option B
95 PTO Tractor Option B	Heavy Duty Dump Chassis – Option A
Track Mount Excavator Option A-1	Heavy Duty Dump Chassis – Option C
Track Mount Excavator Option A-2	Heavy Duty Dump Chassis – Option D
Track Mount Excavator Option A-3	Heavy Duty Dump Chassis – Option F
Track Mount Excavator Option B-1	Lowboy Tractor Option – A
Track Mount Excavator Option B-2	Lowboy Tractor Option – B
Track Mount Excavator Option B-3	Lowboy Tractor Option – E
Track Mount Excavator Option C-1	Skid Steer Loader w/no attachments
Track Mount Excavator Option C-2	Skid Steer Attachments
Compact Track Mount Excavator Option D-1	Ride-on Industrial Boom Mower
Compact Track Mount Excavator Option D-2	Asphalt Distributor Truck
Compact Track Mount Excavator Option D-3	Chip Spreader
Mini Track Excavator Option E-1	Rubber Tire Roller
19 Ton Wheeled Excavator	7.5 Ton Single Drum Vibratory Roller
21 Ton Wheeled Excavator	One-man Pothole Patcher Option A
2WD Highway Speed Truck Excavator	One-man Pothole Patcher Option B
4WD Highway Speed Truck Excavator	Trailer Mounted Patcher – Diesel
Light Duty Motor Grader – Option A	Trailer Mounted Patcher – Air Compressor/Tools
Light Duty Motor Grader – Option B	Trailer Mount Mastic Patcher/Crack Sealer
Heavy Duty Motor Grader – Option A	Asphalt Storage Tanks
Heavy Duty Motor Grader – Option B	Half Round End Dump Trailer
Medium Duty Motor Grader – Option A	Lowboy Trailers – 35 Ton/55 Ton
Medium Duty Motor Grader – Option B	Tag Trailer – 20 Ton
Medium Duty Motor Grader – AWD	Road Wideners and Attachments
100 HP Heavy Duty Hydrostatic Bulldozer – Option B	16' Steel Dump Bodies Options B, D, E, F (Automatic and Manual)
100 HP Heavy Duty Hydrostatic Bulldozer – Option C	
100 HP Heavy Duty Hydrostatic Bulldozer – Option D	

Time is of the essence in submitting bids and only bids received in the Association office by 10:00 a.m. Central Time on Friday, October 22, 2021 will be opened and considered. Bidders and any other interested individuals are invited to attend the bid opening.

THE INVITATION PACKAGE

The invitation package for each item to be bid includes: this invitation to bid, the written bid specifications for the particular item of heavy road equipment, and a Bid Submittal Form to be used in submitting a bid for that particular item. Bidders should verify that they have received all pages of the invitation package. If there are any omissions, the bidder should contact **Kenya Howard** in the Association office by mail, fax, or e-mail (jointbid@alabamacounties.org) to request missing pages. It is the responsibility of the bidder to make this request in sufficient time to prepare and submit the bid in time for the bid opening. Bidders should carefully read and comply with all parts of the invitation package, including all attachments and/or any addendum.

PREPARING AND SUBMITTING BIDS

All bids must be typed or hand written in ink on the attached Bid Submittal Form. **The completed Bid Submittal Form shall be placed in front of and separated from all other documents included in the bid packet, such that it will be the first document viewed upon opening the bid packet.**

Bids submitted in pencil and bids not submitted on the Bid Submittal Form will **not** be considered. All bids shall include a current catalog or model specification document for the equipment model number being offered for consideration. Bids submitted without such documentation will **not** be considered. Only information contained on the attached Bid Submittal Form and in the model specification document will be considered in evaluating bids.

Each separate requirement in the bid specification includes a block for indicating whether or not the item bid meets the specification. The bidder shall indicate compliance with each requirement by checking "Yes" or "No" in the block to the right of each bid specification. In addition, the bidder shall indicate the page number in the supplied manufacturer's equipment literature on which compliance with the specification can be verified. Failure to complete this portion of the bid form may result in the subject bid not being considered.

Each bid for one of the heavy equipment items included in the bid package must be submitted on the Bid Submittal Form for that item and forwarded in a separate envelope with the bid item and item number clearly identified on the outside of the envelope. Envelopes containing a "no bid" shall also include the words "NO BID" on the outside of the envelope. Facsimiles and e-mails will not be accepted. Bids submitted by "Express/Overnight" services must be in a separate inner envelope or package sealed and identified as stated above. All bids must be received in the Association office prior to the bid opening. Bids received after the deadline will be returned unopened.

The County Joint Bid Program reserves the right to require a performance bond from successful bidders as permitted under Alabama law. However, **no bid bond is required for this bid offering.**

All bids should be mailed or hand-delivered to:

Attn: Joint Bid Program
Association of County Commissions of Alabama
2 North Jackson Street Montgomery, Alabama 36104 (Physical Address)
P.O. Box 5040, Montgomery, Alabama 36103 (Mailing Address)

BID SPECIFICATIONS

Please note that each piece of heavy equipment available for bid may include several different sizes and categories of machines. You should read each set of specifications very carefully as the differences vary depending upon the piece and size of equipment.

The award will be based on the total cost of the **Standard Machine** bid by the lowest responsible bidder. Each Bid shall include a **Manufacturer's Suggested Retail Price Sheet (MSRP)** for each machine bid. The percent difference between the Manufacturer's Suggested Retail Price (MSRP) for the standard machine as specified by these bid specifications and the actual price bid by the vendor will be calculated and that percentage discount shall be applied to any options an individual county may choose to add to the machine.

Once the bids have been awarded, any county participant purchasing under this program may, at its discretion, add any of the vendor's available options at the same discount off the Manufacturer's Suggested Retail Price Sheet as was applied to the Standard Machine Price Bid.

Any use of specific names and/or model numbers in the attached specifications is not intended to restrict the bidder or any seller or manufacturer, but is included solely for the purpose of indicating the type, size, and quality of materials, product services, or equipment considered best adapted to the use of the counties participating in the joint bid program.

ACQUISITION AND FINANCING OPTIONS

The awarded Vendor will provide the equipment, including any options required by the purchaser, at the awarded price as contracted through the Joint Bid Program. The purchaser may secure its own financing to acquire the equipment or execute any financial options available under Alabama law with the awarded Vendor in order to acquire the equipment.

BIDDER QUALIFICATIONS

All bidders and all program participants must be in compliance with any applicable federal, state, county and municipal laws, regulations, resolutions and ordinances, including but not limited to, licensing, permitting, and taxation requirements. All bidders should be prepared to submit evidence or documentation as proof that they are properly licensed and permitted under any applicable laws upon request. Such evidence or documentation may be submitted with the bid. Additionally, all bidders shall provide proof that they are in compliance with the e-verify requirements of Alabama's Immigration Law (Ala. Code § 31-13-1 et seq., as amended by Act No. 2012-491).

BID AWARD

The Houston County Commission will serve as the awarding authority for all bids and will award all contracts at a regular meeting of the Houston County Commission. Any and all bids submitted in compliance with this invitation to bid shall be considered, and award will be made to the lowest responsible bidder meeting bid specifications as determined by the awarding authority in compliance with Alabama law. All bids will be reviewed and evaluated by a committee created for that purpose, which committee will make comments and recommendations to the awarding authority regarding the award. All factors contained in each invitation package will be evaluated in determining the successful bidder, and any omissions of the stated requirements may be cause for rejection of the bid submitted. The awarding authority reserves the right to reject any and all bids, to waive any informality in bids, and to accept in whole or in part such bid or bids solely at its discretion.

The contract period will be one year with an option to renew for a second and third year under identical price, terms, and conditions upon the mutual consent of the vendor and the awarding authority. Any renewal contract shall be approved in writing by the vendor and the awarding authority no later than 90 days prior to the expiration of the existing contract.

CONTACT REGARDING BIDS AND INVITATION

Contact initiated by a potential bidder with any county official, county employee, or member of the Association staff shall only be as specifically set out in this Invitation to Bid. Any questions related to the bid or the County Joint Bid Program shall be directed to Association staff in writing under the procedures set out in this Invitation to Bid. Additionally, a bidder may contact the Association in writing to request an appointment to review bid specifications following the bid opening. **However, there shall be no communication with any county official or county employee regarding this bid between the date of this invitation and the date of bid award.** Any contact other than as set out here shall be deemed as an attempt to unduly influence the bid award, and shall be grounds for rejection of the bid submitted by the bidder initiating such other contact.

Any questions or problems related to downloading or obtaining copies of this Invitation to Bid should be directed to **Kenya Howard** at jointbid@alabamacounties.org or **334-263-7594**.

Any other questions or requests for additional information regarding this invitation or the bid specifications shall be submitted **in writing** no later than five (5) days prior to bid opening to:

ATTN: Patrick McDougald
Association of County Commissions of Alabama
P.O. Box 5040
Montgomery, Alabama 36103

E-mail: barbeng@bellsouth.net

VOLVO

Construction Equipment

Pricing Valid From: 01/01/2022

Model: Volvo L70H, Wheel Loader Build Sheet

Description	Article	MSRP
Volvo L70H, Wheel Loader	L70H	\$159,608.24
20.5R25* Michelin XHA2 L3	WL20081	\$13,628.56
4-Rims (3pc) for 20.5 or 600 tires	WL21004	\$2,955.28
Engine D6J (Tier 4F) US	WL32017	\$0.00
Fuel fill strainer	WL30007	\$0.00
Delayed Engine Shutdown	WL30024	\$133.96
Reversible cooling fan	WL37001	\$890.12
Rimpull	WL39501	\$0.00
Volvo Airsusp, Heated, 2pt, 3" belt	WL41010	\$1,469.48
Air conditioning with ACC (automatic climate control)	WL42001	\$4,721.92
Steering knob	WL45001	\$0.00
Sliding window in door	WL45003	\$0.00
ACC Fahrenheit decal only	WL45004	\$0.00
Universal key	WL45005	\$0.00
Secondary steering, electric	WL45019	\$0.00
Lunch box holder	WL45023	\$0.00
Anchorage manual	WL45027	\$0.00
Co-pilot incl Camera	WL45057	\$0.00
Operator Coaching Basic	WL88201	\$0.00
LOTO, Lock out tag out	WL53009	\$0.00
Back up alarm	WL54001	\$0.00
Single lever ctrl, 2 funct EL	WL47010	\$1,805.40
Max Boom Height	WL65013	\$0.00
Oil sampling ports	WL71002	\$216.24
Footsteps front frame	WL71005	\$211.48
Footstep, right side	WL71009	\$0.00
Front belly guard	WL86009	\$2,585.36
Rear belly guard	WL86010	\$2,959.36
Cover plates, rear frame	WL86013	\$0.00
Frame, life time warranty	WL86041	\$422.28
CareTrack Connectivity 4 yr Subscription	WL88010	\$0.00
CareTrack, GSM/Satellite	WL88018	\$0.00
De-activate SAT	WL88020	\$0.00
104" 3.0 yd pin-on HD GP bucket (available with weld-on teeth only)	WLA86418	\$10,216.32
Bolt-on adapter kit -LA10BN25	WLA82737	\$921.40

WLA82734	WLA82734	\$521.56
Segment kit for 104" STE bolted options	WLA80673	\$958.12
Bracket for Fire Extinguisher	WL86034	\$179.52

TOTAL MSRP as per SPECIFICATIONS	\$204,404.60
---	---------------------

OPTIONS

BASIC

BOOM

Long boom	WL11002	\$3,226.60
-----------	---------	------------

TIRE

TIRES

20.5R25* L-2 Michelin Snoplus (4)	WL20019	\$14,155.56
20.5R25* Michelin XHA2 L3	WL20081	\$13,628.56
C3_20.5X25 Solid tire SMOOTH	WL20106	\$24,158.36
C3_20.5X25 Solid tire TRAC	WL20109	\$22,335.28
20.5R25* Titan MXL L3	WL20116	\$10,512.80
620/72R26 Michelin XBIB AGRI, available from Arvika only	WL20118	\$17,533.80
750/65R26 Michelin XBIB AGRI, available from Arvika only	WL20119	\$21,106.52
620/70R26 Trelleborg TM 3000 AGRI, available from Arvika only	WL20123	\$16,541.68
C3_20.5R25*** Michelin XMINE D2 PRO L5	WL20127	\$23,463.40

RIMS

4 - Rims (3pc) w/wood protection for 20.5 tires (for STD fenders only)	WL21006	\$4,407.08
--	---------	------------

MUDGUARDS

Front & rear STD fenders w/ wideners for wide tires	WL22002	\$147.56
C3_Full coverage fenders, front/rear for wide tires	WL22003	\$631.72
Full coverage fenders rear for standard tires	WL22004	\$631.72
Delete front fenders	WL22006	-\$203.32

MUDFLAPS

C3_Mudflaps for full fenders for wide tires	WL23001	\$501.84
Mudflaps for full fenders for standard tires	WL23003	\$427.04

ENG

ENGINE EQUIPMENT

Max. fan speed, hot climate	WL30002	\$119.00
Fuel heater	WL30008	\$687.48
Hand throttle control	WL30009	\$537.88
C3_Cooling package, radiator, charge air cooler, hydraulic oil cooler corrosion protection	WL30010	\$1,606.16
Engine auto shutdown	WL30011	\$507.96

AIR PRECLEANER

Air precleaner, Turbo II	WL31001	\$945.88
Air precleaner, Sy-klone	WL31002	\$1,588.48

ENGINE BLOCK HEATER

Engine block heater, 120 V	WL33002	\$662.32
----------------------------	---------	----------

BRAKE AND AXLE

Stainless steel, brake lines	WL34001	\$1,413.04
C3_Oil cool and filter, fr/re axl (for machines without reversing fan)	WL34003	\$3,618.28

DIFF LOCK

Limited slip rear axle	WL35001	\$3,320.44
------------------------	---------	------------

REV FAN

Axle cooling including reversible fan	WL37002	\$4,507.72
---------------------------------------	---------	------------

SPEED LIMITER

Speed limiter (12 mph)	WL38001	\$507.96
Speed limiter (19 mph)	WL38002	\$507.28
Speed limiter (25 mph)	WL38003	\$507.28

TRANSMISSION

Lockup converter	WL39007	\$2,372.52
------------------	---------	------------

TRANSMISSION OPTION

AGRI Powershift 1-4 (Must select WL10516)	WL39500	\$446.08
---	---------	----------

CAB**SEAT**

Volvo,Airsusp,Heavy Duty	WL41007	\$1,828.52
Volvo Airsusp, Heated, 3pt, 3" belt	WL41012	\$1,709.52
Premium Comfort ISRI	WL41017	\$2,218.84
Prem Comf ISRI, 3pt seat belt	WL41018	\$3,533.96

AC

Air conditioning w/ corrosion prot. condenser & ACC (auto climate control)	WL42002	\$6,208.40
--	---------	------------

RADIO / CD

Radio BlueTooth/USB/AUX no CD	WL43004	\$714.68
-------------------------------	---------	----------

RADIO KIT

RH Radio mounting kit including 20 amp converter, speakers & 12v outlet	WL44001	\$752.08
LH Radio mounting kit including 20 amp converter, speakers & 12v outlet	WL44002	\$752.08

Radio equipment

C3_Subwoofer	WL44100	\$582.08
--------------	---------	----------

CAB EQUIPMENT

Cab ladder, rubber suspended	WL45006	\$417.52
Sun blinds rear window (front blinds now standard)	WL45007	\$276.08
Sun blinds, side windows	WL45008	\$435.88
C3_Carbon filter for foul smelling environments	WL45010	\$354.96
Timer cab heating	WL45011	\$354.96

Respa cab air filtration system - for very dusty environments	WL45012	\$5,151.68
C3_Left hand armrest for Volvo seats. Incompatible w/CDC (comfort drive control) for HD seat	WL45018	\$151.64
Parking brake not applied alarm, seat activated, air seat	WL45021	\$313.48
C3_Asbestos dust protection filter (HEPA) Compliant with OSHA silica rule	WL45022	\$293.08
Forward view mirror for visibility over large buckets	WL45028	\$0.00
C3_Unive Key US, Remote door open	WL45032	\$430.44
Left hand armrest for Volvo Airsusp. seats. Incompatible w/CDC (comfort drive control)	WL45040	\$149.60
Armrest for ISRI premium seat	WL45046	\$180.88
C3_Comfort Drive Control EL-servo	WL45047	\$6,747.64
Radar Detect in Co-pilot	WL45058	\$2,272.56
Forward Camera	WL45059	\$1,697.28
Volvo Co-Pilot Applications		
Tire Pressure Monitoring System, cannot be combined with WL97001	WL88203	\$2,006.00
Load Assit MAP (Maps Only)	WL88204	\$1,894.48
LEVER		
Single lever ctrl, 2 funct EL	WL47010	\$1,805.40
Single lev ctrl, 2 funct EL LB	WL47011	\$2,121.60
Single lever ctrl, 3 funct EL (hydraulic and detent function included)	WL47012	\$5,127.20
Single lev ctrl, 3 funct EL LB (hydraulic and detent function included)	WL47013	\$5,441.36
C3_Single lever ctrl, 4 funct EL (hydraulic and detent function included)	WL47014	\$7,520.12
C3_Single lev ctrl, 4 funct EL LB (hydraulic and detent function included)	WL47015	\$7,935.60
REARVIEW MIRROR		
Rearview mirrors,el.adj& heat.	WL45201	\$318.24
Rearview mirrors, long arm RH	WL45202	\$229.84
Rearview mirrors, electric/heat long arm RH	WL45203	\$498.44
EL		
LIGHTS		
C3_Attachment lights	WL50005	\$557.60
C3_License plate holder, lighting	WL50006	\$218.28
Automatic activation of rear work lights when reversing	WL50011	\$344.76
Reversing warning light, automatic	WL50012	\$917.32
C3_Working lights, Attachment LED	WL50018	\$830.96
Headlights LED	WL50020	\$1,039.04
LED Economy Package (must select WL50020)	WL50022	\$2,122.96
LED Feature Package (must select WL50020)	WL50023	\$2,819.28

LED Power Package (must select WL50020) [WL50024](#) \$4,407.76

Seat belt indicator, external WL50026 \$315.52

Halogen Economy Package [WL50027](#) \$120.36

Halogen Feature package [WL50028](#) \$236.64

Halogen Power Package [WL50029](#) \$564.40

ROTATING BEACON

Warning Beacon, LED WL51003 \$611.32

Warning Beacon LED, Automatic (Waste application) WL51004 \$611.32

BATTERY

Jump start connector NATO, type WL53008 \$124.44

REV ALARM

C3_Reverse alarm, White noise WL54002 \$204.00

HYD

HYD FLUID

C3_Hydr Fluid MNRL Cold Climate WL60007 \$1,217.88

HYD FUNCTION

EL Hydraulic 2 functions, LB WL61028 \$1,646.96

EL Hydraulic 3 Functions (hydraulic and detent function included) WL61029 \$3,056.60

EL Hydraulic 3 Functions, LB (hydraulic and detent function included) WL61030 \$3,213.68

EL Hydraulic 4 Functions (hydraulic and 3rd funct detent function included) WL61031 \$4,634.20

EL Hydraulic 4 Functions, LB (hydraulic and 3rd funct detent function included) WL61032 \$4,792.64

LIFTING FUNCTION

C3_Single acting lifting function WL63001 \$1,227.40

SEP ATT LOCKING

Separate attachment locking, std. boom WL64001 \$1,739.44

Separate attachment locking, long boom WL64002 \$2,637.72

SERV

LUBE SYST ATTACHMENT BRACKET

Auto lube for attachment bracket, std. or long boom WL70001 \$363.12

LUBE SYSTEM

Auto lube for standard boom WL70003 \$8,595.88

Auto Lube for long boom (Long boom must be ordered separately) WL70005 \$8,595.88

SERVICE

C3_Tool kit WL71007 \$164.56

OTHER

COUNTER WEIGHT

Counterweight, logging (can't be ordered from Arvika w/ solid tires or wooden protect rims) WL81001 \$1,063.52

Tow Hitch WL82005 \$326.40

DECALS

Decals, USA	WL83005	\$0.00
DECALS PLATES		
Slow moving vehicle sign	WL84001	\$220.32
LIGHT GUARDS		
Head light guards	WL85001	\$354.96
HD tail light guards	WL85003	\$731.68
PROTECTION		
Cover plates under cab	WL86005	\$1,093.44
Grease zerk guards (Can't be ordered with Auto Lube)	WL86007	\$979.20
Front belly guard	WL86009	\$2,585.36
Rear belly guard	WL86010	\$2,959.36
HD main valve cover and diff lock guard	WL86011	\$814.64
C3_Corrosion protection machine	WL86014	\$11,891.84
Center hinge & rear frame guard	WL86015	\$1,967.24
Wheel/axle seal guards (for use with Volvo rims only)	WL86017	\$1,024.76
Boom cylinder hose & tube guards	WL86018	\$1,567.40
Boom cylinder hose & tube guards long boom	WL86019	\$1,748.28
Antitheft system	WL86020	\$267.24
Windshield guard	WL86021	\$3,825.68
C3_Window guards, side & rear windows	WL86022	\$5,416.20
Radiator grill guard	WL86023	\$2,986.56
Fire suppression system (requires WL30011)	WL86029	\$8,642.12
Bracket for Fire extinguisher	WL86034	\$179.52
Emergency stop, shutdown	WL86035	\$122.40
C3_Emergency Stop, Exterior	WL86042	\$122.40
No Anti-Rust Agent	WL86045	\$0.00
OTHER		
C3_Can-Bus interface, Basic	WL88021	\$270.64
C3_Can-Bus interface, Advance	WL88022	\$301.24
ARCTIC KIT		
Arctic kit; separate attachment locking hoses	WL89001	\$694.28
Arctic kit; accumulators, brake, & pilot hoses	WL89002	\$693.60
C3_Brake system, Arctic	WL89009	\$705.84
Servo system arctic	WL89010	\$0.00
ATT		
ATTACHMENT BRACKET		
Attachment bracket (Must select Hook-on attachments)	WLA85346	\$4,666.16
BUCKETS		
118" 7.2 yd hook-on refuse bucket	WLA82512	\$19,186.88
108" 6.5 yd hook-on refuse bucket	WLA83187	\$16,398.20
104" 2.6 yd hook-on HD GP bucket	WLA86401	\$9,029.72

98" 2.6 yd hook-on HD GP bucket	WLA86402	\$8,831.84
104" 2.9 yd hook-on HD GP bucket	WLA86404	\$9,268.40
98" 2.9 yd hook-on HD GP bucket	WLA86405	\$9,022.24
104" 3.0 yd hook-on HD GP bucket	WLA86407	\$9,394.20
104" 3.0 yd pin-on HD GP bucket (available with weld-on teeth only)	WLA86418	\$10,216.32
98" 2.9 yd hook-on GP bucket	WLA86425	\$7,165.16
104" 3.0 yd3 SD Hook-on GP bucket	WLA87535	\$5,962.24
BOLT ON EDGES		
98" 3-piece bolt-on edge kit, straight-edge bucket (BOE adds 0.2 yd3)	WLA80134	\$1,026.80
104" 3-piece bolt-on edge kit, straight-edge bucket (BOE adds 0.2 yd3)	WLA80670	\$1,054.68
118" steel bolt-on edge for tamping buckets	WLA82568	\$1,533.40
108" steel bolt-on edge for refuse bucket	WLA82569	\$1,069.64
Pallet fork attachments		
57" offset fork tine - right, 6" X 2.4"	WLA80106	\$1,278.40
57" offset fork tine - left, 6" X 2.4"	WLA80107	\$1,278.40
57" straight fork tine, 6" X 2.4"	WLA80108	\$1,278.40
72" straight fork tine, 6" X 2.4"	WLA83013	\$1,472.88
59" Fork frame - standard	WLA83770	\$2,964.12
87" Fork frame - standard	WLA83771	\$4,202.40
C3_96" straight fork tine, 6" X 2.5"	WLA87641	\$2,225.64

ACCA

Volvo Construction Equipment
Building Tomorrow



L60H, L70H, L90H 2.0

John Edwards
Governmental Sales Manager
850-685-7055
jedwards@cowin.com

Volvo Wheel Loaders 11.0-17.3 t / 24,250-38,140 lb 164-184 hp





WELCOME TO OUR WORLD

Welcome to a world of industry leading machinery. A world where imagination, hard work and technological innovation will lead the way towards developing a future which is cleaner, smarter, and more connected. A world supported by the enduring values of the Volvo Group. A world of stability, sustainability and innovation. A world which we put our customers at the heart of.

Welcome to the world of Volvo Construction Equipment – we think you're going to like it here.

Working harder, working smarter

For over 180 years Volvo has been a pioneer in the design and manufacture of machines which set the standard for efficiency, performance and uptime. Across our range of excavators, wheel loaders and haulers, our reputation for engineering excellence is unrivalled, which means whatever your operation or application, we can provide a total fleet solution to help you succeed.

Building on our proud history, the Volvo Concept Lab continues to create cutting-edge ideas and innovative concepts, to ensure we offer customers machines which work harder and smarter long into the future.



Solutions for you

Our industry leading machines are just the start of your relationship with Volvo. As your partner, we have developed an extensive range of additional solutions to help you improve uptime, boost productivity and reduce costs.

Designed for your business

Structured across nine blocks, our portfolio of products and services are designed to complement your machine's performance and boost your profitability. Simply put, we offer some of the best guarantees, warranties and technological solutions in the industry today.

There when you need us

Whether you're buying new or used, our global network of dealers and technicians offer around-the-clock support, including machine monitoring and world-class parts availability. It's the basis of everything offered by Volvo Services, so you can be confident we've got you covered right from the start.

BUILDING TOMORROW

Multitude of talents

Say hello to the latest additions to the H-Series wheel loaders: the upgraded L60H, L70H and L90H. Built on the established H-Series design, the next-generation machines are the ultimate all-arounders, offering the high quality performance you'd expect from a Volvo wheel loader, plus a host of features that promote greater versatility and stability to handle your workload.

Designed to do more

Knock heavy-duty jobs down to size with the H-Series wheel loaders. These robust workhorses offer unshakable stability thanks to the new, optimized loading unit weight and redesigned counterweight. Designed to do more, the well-balanced machines yield up to 3% higher tipping load, so you can tackle a variety of tasks – no matter how demanding.



Adapt to any application

Get the most out of your machine with a range of purpose-built attachments, including grapples, sweepers, material handling arms, snow plows and more. Because different jobs require different attachments, we can custom build a Volvo attachment to match your specific needs. To unlock the use of multiple attachments, simply engage the third and fourth hydraulic functions.




Fully loaded

Whatever the job, we have the tools to get it done. Volvo offers a full range of Volvo buckets, including general purpose, grading, refuse, light material, and more, to handle everything, from light material to heavy rocks. Built on decades of engineering excellence, Volvo buckets are optimized for Volvo wheel loaders and durably designed for all types of materials and tasks.



Made to match

Lift your machine's versatility to the next level with pallet forks, offering high visibility and the advantage of TP linkage and parallel movement. Ideal for pallet and material handling, Volvo forks are heavy-duty in design, allowing the wheel loader to move effortlessly around different work sites, such as yards, warehouses and harbors.

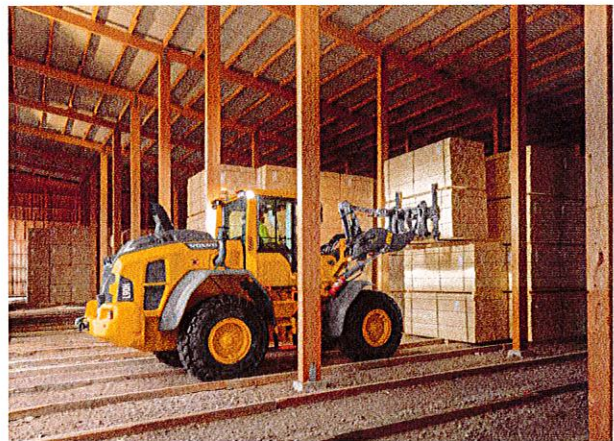

LOADED WITH VERSATILITY

Take on any application with the H-Series wheel loaders, equipped with the Torque Parallel (TP) linkage for ultimate versatility. Not only does the TP linkage offer high breakout, tilt in and lifting forces, it keeps the attachments parallel throughout the lifting range for exceptional load stability and easy bucket filling. Change tools in a matter of seconds with the Volvo attachment bracket.



L90H: tried and trusted

"You need height with your loader bucket to drop material and fluff so it moves smoother through the conveyors. This Volvo loader increases our ability to take in more market share and make our operation sustainable in terms of revenue."

Jason Yorks, Resource Recovery Manager and Recycling Coordinator, Lycoming County Resource Management Services, Pennsylvania (USA)

UP TO 20% MORE EFFICIENT

Achieve up to 20% greater fuel efficiency thanks to advanced features, such as Eco pedal and the new optional lock-up* function. The lock-up feature eliminates losses in the torque converter by creating a direct drive between the engine and transmission, which work in harmony with the axles. To improve cycle times and fuel use, customize the lock-up engagement of your machine. (*with gear selection engagement, ranging from gears 2-4, 3-4, 4)

Lock-up is not available on L60H



Drive down your costs

Get the most out of your investment with a cost-effective solution. At Volvo, we're committed to driving your operating costs down. That's why we've refined the mid-sized H-Series wheel loaders to deliver up to 20% greater fuel efficiency and optimize productivity.

Productivity up, fuel down

Cut operating costs and propel your machine's productivity with rimpull control. With the power to control the rimpull, the operator can reduce tire wear and prevent wheel spin for effective bucket filling. Select the optimum rimpull to match the application and ground conditions, and experience high productivity at low costs.

Work smarter

For the best use of engine power in all applications, rely on Smart Control, designed to optimize fuel efficiency and performance. Standard on the mid-sized H-Series wheel loaders, Smart Control ensures the correct torque in all situations for perfect harmony between the engine and hydraulics.



Do more on and off road

Do more on and off road with an increased top speed of 50km/h (31 mph). Not only is the machine faster, it is also a pleasure to operate thanks to the optional lock-up feature, which improves drive response and incline performance.

Boost your profitability

Ensure a low total cost of ownership with a host of Productivity Services and Fuel Efficiency Services. From reports, training packages and consultancy solutions, Volvo has you covered – just speak to your dealer for more information.




Comfortably in control

It's not just the machine that's ready for any challenge. From the comfort and security of the spacious Volvo cab, the operator is primed for a productive work shift.

Safety as standard

Safe from the inside out, the latest loaders feature anti-slip steps and strategically placed handrails for ease of access, plus an array of seatbelt options, such as the orange three-point seatbelt. The attachment bracket uses a new visual indicator to let you know the attachment is locked and ready to use.

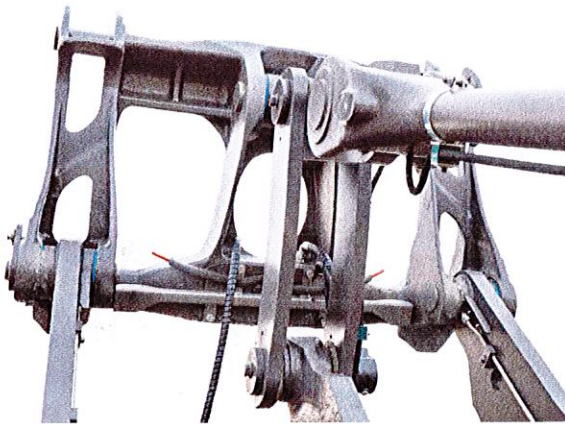

See more, do more

Experience a clear view of the attachment and jobsite thanks to large expanses of glass, redesigned side mirrors, rear-view camera, as well as optional front camera and radar detect system. The machines also feature orange handrails and steps to stand out against the jobsite, and LED lights, available in various packages.



Take command

Customize your Volvo and take command of hydraulic functions with electro servo controls*. From the cab, adjust the detent third function, boom kick-out, return to dig and bucket leveling. Easily change between linear or single lever controls and select from three hydraulic settings to tailor the lever control according to your preferences.

**Not available on L60H*



Bucket leveling function

Take your productivity to the next level with the bucket leveling function. The new function enhances operator performance by automatically returning the bucket from both dump and carry positions.

Not available on L60H



NO COMPROMISE ON COMFORT

Hard work has never felt so easy from the spacious of the Volvo cab, featuring your choice of comfortable operator seat, as well as ergonomic controls. Perform basic configurations using the Contronic key pad panel, and keep an eye on the operation with the information display.




L90H: tried and trusted

"As far as I am concerned Volvo has cornered the market on operator comfort. They do everything they can to make it comfortable for the operator working eight hours day or longer. The heated seats are a real bonus. And with the high tip bucket I can drive on the flat floor and still reach the metering bin."

Ron Snell, loader operator, Lycoming County Resource Management Services, Pennsylvania (USA)

OPERATOR COACHING

As machines become more advanced, and with smarter technology, the Operator Coaching app helps to ensure operators are using their Volvo machine to its full potential. The intuitive app provides real-time guidance to operators, helping them understand how their actions influence machine productivity and efficiency, as well as identify areas for improvement or changes in their technique.

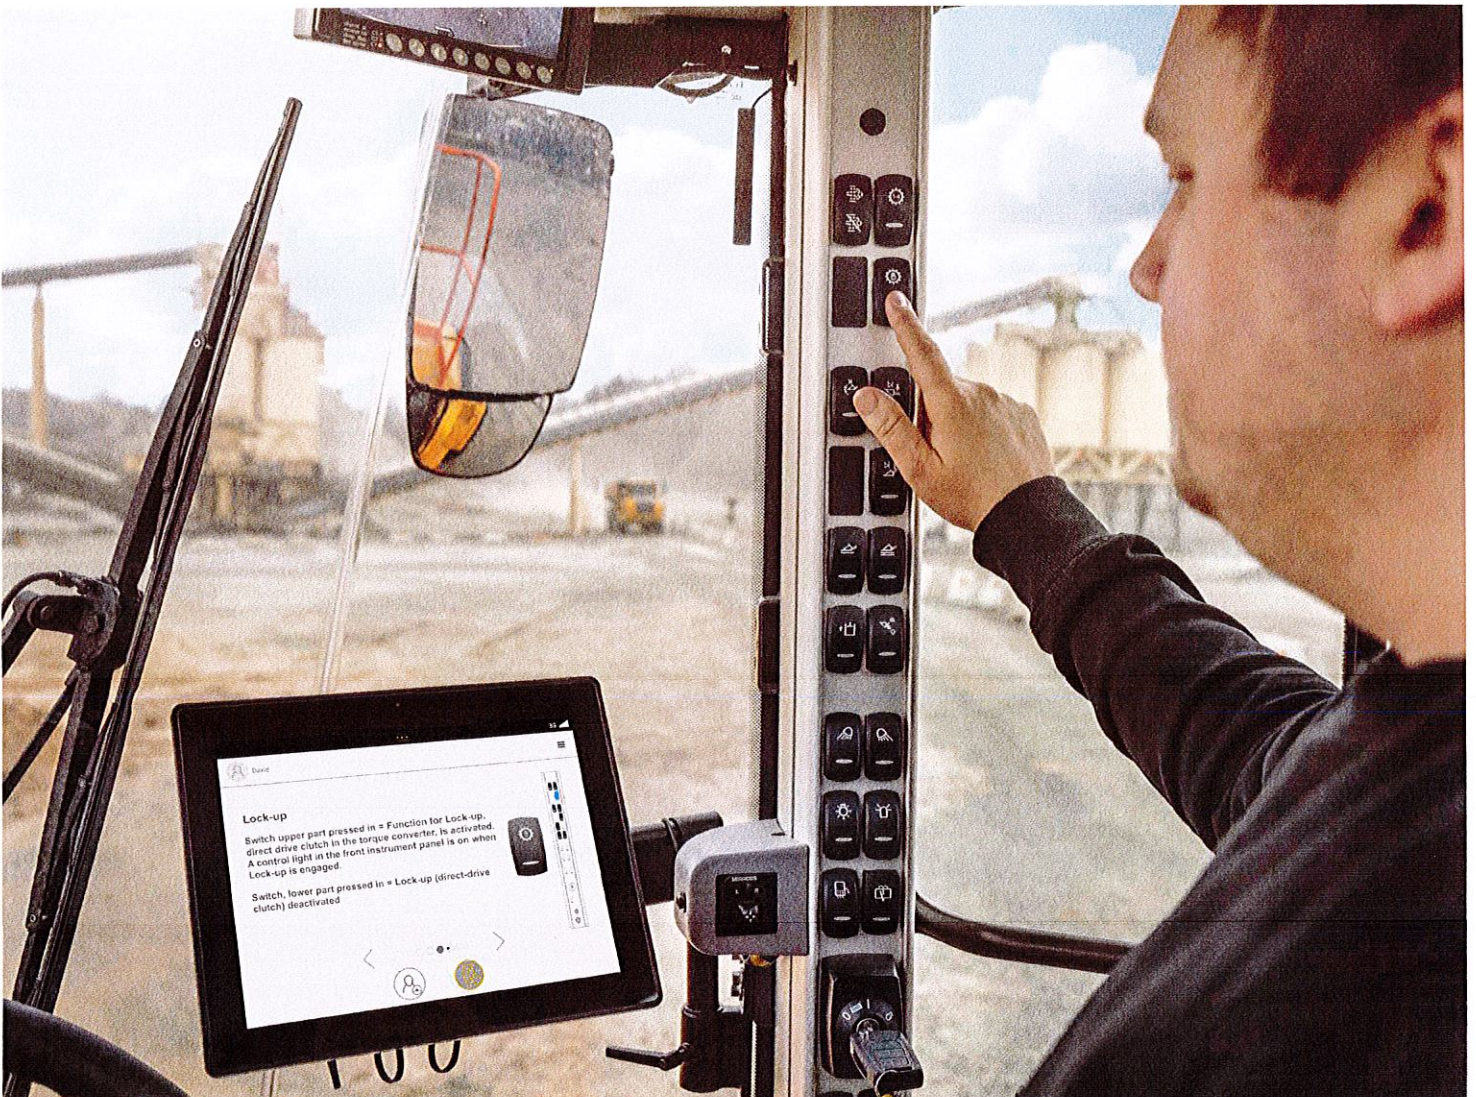

Operator Coaching app: put to the test

"I find it really useful. The system will tell me when to activate the Boom Suspension System, when to activate Lock-Up and flag up any changes I need to make to my operating style, like not riding the brakes and the throttle at the same time."

Operator from USA


Load Assist

Optimize your load cycles with Load Assist, powered by Volvo Co-Pilot – the revolutionary in-cab display. Gain access to a set of smart apps* and boost the efficiency of your operation.

*The On-Board Weighing app is not available on L60H, L70H and L90H.

Map

Get accurate machine positioning with Map, a clever app that allows operators to monitor on-site traffic in real-time. Not only does this give operators an improved orientation of the site they are working on, but it allows them to proactively adjust their driving behavior according to traffic conditions.

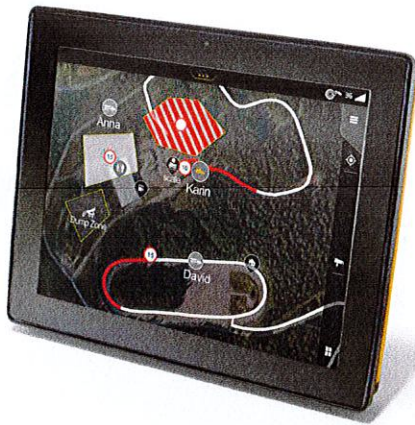

Integrated rear-view

Operators benefit from a full view of their surroundings when reversing, thanks to the rear-view camera and optional radar detect system which are now integrated into the Volvo Co-Pilot display.



Calculator

Complete basic calculation and use the Calculator app to quickly and easily convert six unit types (length, mass, angle, time, temperature and speed).

Notes

There's no need for a pad and pen with the Notes app. The digital notepad can be used to write and save notes while in the cab.

Weather

Stay on top of the weather with the easy-to-view Weather app, helping you stay informed of current and upcoming weather conditions.



Ultimate all-rounder

Designed to do more

- Optimized loading unit weight, heavy-duty counterweight for greater stability
- Higher tipping load: 1.7% for L60H, 1.6% for L70H, 3.4% for L90H
- L90H: increased lifting height by 75 mm (3 in)
- Electro-servo controls (L70H, L90H)
- Bucket leveling function
- Choice of three hydraulic response modes: active, normal, soft.

LOADED WITH VERSATILITY

- Torque Parallel linkage
- Volvo attachment bracket
- Range of purpose-built attachments
- Optional custom-built attachment
- 3rd and 4th hydraulic functions



Volvo Services

- Load Assist, powered by Volvo Co-Pilot
- Operator training
- ActiveCare Direct
- Genuine Volvo Parts

KEEP IT MOVING

- 1000hr engine oil change interval
- Quick hydraulic oil fill thanks to new mounted nipple
- 50% larger hydraulic oil cooler
- Lifetime Frame and Structure Warranty
- Delayed engine shutdown
- Optional external axle cooling (L70H, L90H)



Greater access

- Cooler installation slides out for easier cleaning
- Repositioned fill spouts for transmission and engine oil
- Ground-level access to service points
- Electronically-operated engine hood

Safety as standard

- Anti-slip steps and strategically placed handrails
- Orange three-point seatbelt
- Redesigned side mirrors
- Rear-view camera
- Optional radar detect system
- Optional external seatbelt indicator light

UP TO 20% MORE EFFICIENT

- Optional lock-up converter with gear selection (L70H, L90H)
- Increased top speed of 50km/h (31 mph) with lock-up feature
- Rimpull control
- Smart Control
- Smooth Control
- Eco pedal

Keep your machine moving

The latest generation Volvo L60H, L70H and L90H wheel loaders extends their already legendary status by offering an upgraded portfolio of uptime-enhancing features. From simplified serviceability to proactive dealer support, you have access to everything you need to keep your machine up and moving.

Keep it cool

Count on Volvo to keep up. The improved hydraulic cooling capacity regulates the component temperature, for greater machine utilization when using attachments that are demanding on the hydraulics, and longer hydraulic component life. This, plus the external axle cooling option – ideal for tough applications – doubles the axle oil change intervals for higher uptime and lower maintenance costs.




Greater access

To keep uptime high, the H-Series wheel loaders are equipped with an engine cover that opens electronically, allowing ground-level access to the service points, including the radiator. For swift and easy cleaning, the new cooler installation now slides out. Safely fill the transmission and engine oil thanks to newly repositioned fill spouts, and get back to work without delay.



Delayed engine shutdown

Reduce the wear on your engine with the new delayed engine shutdown feature. The function shuts off the machine when the turbo has cooled down to the ideal temperature. Not only does the feature reduce component wear, it can also be scheduled by the operator to activate automatically for added convenience.

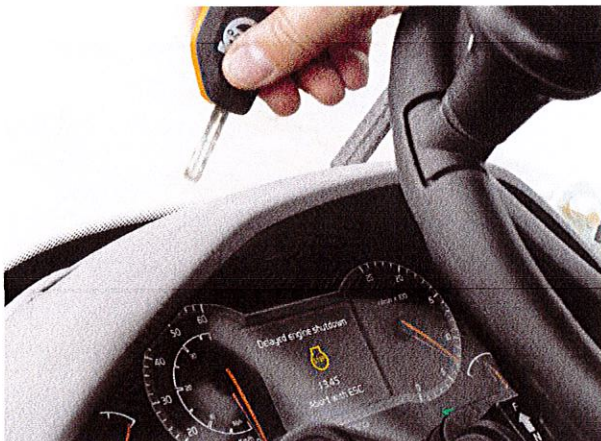

Here to support you

Maintain productivity with our range of Genuine Volvo Parts – all backed by Volvo warranty – with 24-hour parts delivery guaranteed. Maximize machine uptime and reduce repair costs with ActiveCare Direct. The intelligent service from Volvo provides around the clock machine monitoring, as well as customer reports, which suggests ways to optimize efficient machine use and help you take preventative maintenance actions.



DURABLE BY DESIGN

Built by Volvo, for Volvo, you can count on the proven design of the latest wheel loaders to meet the demands of tough job sites. Renowned for their reliability, the next-generation H-Series wheel loaders offer a Lifetime Frame and Structure Warranty, including the front frame, rear frame, articulation joint and loader arms.



Volvo L60H, L70H, L90H in detail

Engine

6-cylinder, 6 liters inline turbocharged diesel engine with an advanced fuel injection system with the common rail. Fuel is distributed under high pressure from a high-pressure accumulator, the rail. One belt driven high pressure pump deliver the fuel to the rail and then further on via high-pressure pipes to the electronically operated fuel injectors. Engine meets Tier 4f / Stage IV emission legislation.

L60H




Engine	Volvo	D6J
Max. power at	r/min (r/s)	1,500 - 1,800 (25 - 30)
SAE J1995 gross	kW (hp)	122 (164)
ISO 9249, SAE J1349 net	kW (hp)	122 (164)
Max. torque at	r/min (r/s)	1,400 (23)
SAE J1995 gross	Nm (ft lbf)	820 (605)
ISO 9249, SAE J1349 net	Nm (ft lbf)	820 (605)
Economic working range	r/min (r/s)	800 - 1,600 (13.3 - 26.7)
Displacement	l (in ³)	5.7 (348)

L70H

Engine	Volvo	D6J
Max. power at	r/min (r/s)	1,500 - 1,800 (23.3 - 28.3)
SAE J1995 gross	kW (hp)	127 (170)
ISO 9249, SAE J1349 net	kW (hp)	127 (170)
Max. torque at	r/min (r/s)	1,400 (23.3)
SAE J1995 gross	Nm (ft lbf)	853 (629)
ISO 9249, SAE J1349 net	Nm (ft lbf)	853 (629)
Economic working range	r/min (r/s)	800 - 1,600 (13.3 - 26.8)
Displacement	l (in ³)	5.7 (348)

L90H

Engine	Volvo	D6J
Max. power at	r/min (r/s)	1,400 - 1,900 (23.3 - 31.7)
SAE J1995 gross	kW (hp)	137 (184)
ISO 9249, SAE J1349 net	kW (hp)	137 (184)
Max. torque at	r/min (r/s)	1,400 (23.3)
SAE J1995 gross	Nm (ft lbf)	934 (689)
ISO 9249, SAE J1349 net	Nm (ft lbf)	934 (689)
Economic working range	r/min (r/s)	800 - 1,600 (13.3 - 26.7)
Displacement	l (in ³)	5.7 (348)

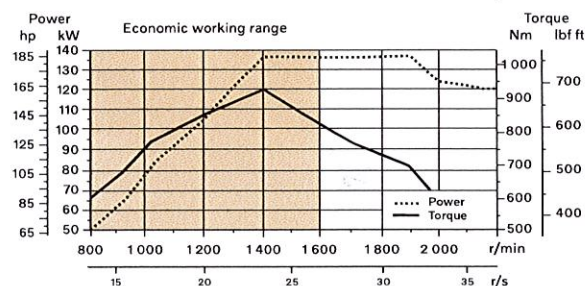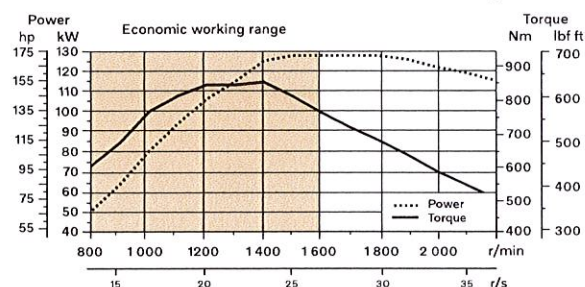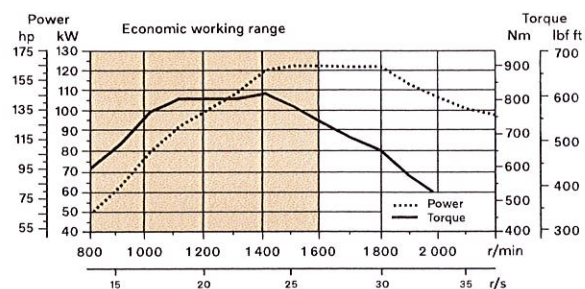

Drivetrain

Torque converter: Single-stage
Transmission: Volvo countershaft transmission with single lever control. Fast and smooth shifting of gears with Pulse Width Modulation (PWM) valve.
Transmission: Volvo Automatic Power Shift (APS) gear shifting system with fully automatic shifting 1-4 and mode selector with 4 different gear shifting programs, including AUTO mode. Also equipped with Rimpull control to avoid wheel spin and optimize bucket filling.
Axles: Volvo fully floating axle shafts with planetary hub reductions and cast steel axle housing. Fixed front axle and oscillating rear axle. 100% differential lock on the front axle.

L60H

Transmission	Volvo	HTE 125C
Torque multiplication, stall ratio		2.5:1
Maximum speed		
1st gear	km/h (mi/h)	Converter 7.5 (Converter 4.6)
2nd gear	km/h (mi/h)	Converter 15 (Converter 9.3)
3rd gear	km/h (mi/h)	Converter 28 (Converter 17.4)
4th gear	km/h (mi/h)	Converter 46 (Converter 28.5)
4th gear: Shown in speedometer and limited by ECU		
Measured with tires		20.5R25
Front axle/rear axle		AWB 15/AWB 15
Rear axle oscillation	± °	13
Ground clearance	mm (in)	470 (18.5)
at oscillation	°	13

L70H

Transmission	Volvo	HTE 125C Non Lock-up / HTE 125 Lock-up
Torque multiplication, stall ratio		2.5:1 Non Lock-up / 2.59:1 Lock-up
Maximum speed		
1st gear	km/h (mi/h)	Converter 7.5 / Lock-up 7.5 (Converter 4.6 / Lock-up 4.6)
2nd gear	km/h (mi/h)	Converter 15 / Lock-up 15 (Converter 9.3 / Lock-up 9.3)
3rd gear	km/h (mi/h)	Converter 29 / Lock-up 30 (Converter 17.4 / Lock-up 18.0)
4th gear	km/h (mi/h)	Converter 46 / Lock-up 50 (Converter 28.5 / Lock-up 31.1)
4th gear: Shown in speedometer and limited by ECU		
Measured with tires		20.5R25
Front axle/rear axle		AWB 25/AWB 20
Rear axle oscillation	± °	13
Ground clearance	mm (in)	470 (18.5)
at oscillation	°	13

L90H

Transmission	Volvo	HTE 125C Non Lock-up / HTE 125 Lock-up
Torque multiplication, stall ratio		2.5:1 Non Lock-up / 2.59:1 Lock-up
Maximum speed		
1st gear	km/h (mi/h)	Converter 6.5 / Lock-up 6.5 (Converter 4.0 / Lock-up 4.0)
2nd gear	km/h (mi/h)	Converter 14 / Lock-up 14 (Converter 8.6 / Lock-up 8.6)
3rd gear	km/h (mi/h)	Converter 26 / Lock-up 27 (Converter 16.2 / Lock-up 16.8)
4th gear	km/h (mi/h)	Converter 46 / Lock-up 50 (Converter 28.5 / Lock-up 31.1)
4th gear: Shown in speedometer and limited by ECU		
Measured with tires		20.5R25
Front axle/rear axle		AWB 25/AWB 20
Rear axle oscillation	± °	13
Ground clearance	mm (in)	470 (18.5)
at oscillation	°	13

Electrical system

Contronic electrical system with central warning light and buzzer for following functions: - Serious engine fault, Low steering system pressure, Over speed warning engine, Interruption in communication (computer fault), Central warning light and buzzer with the gear engaged for the following functions: Low engine oil pressure, High engine oil temperature, High charge air temperature, Low coolant level, High coolant temperature, High crank case pressure, Low transmission oil pressure, High transmission oil temperature, Low brake pressure, Engaged parking brake, Fault on brake charging, Low hydraulic oil level, High hydraulic oil temperature, Overspeeding in engaged gear, High brake cooling oil temperature front and rear axles, etc.

		L60H	L70H	L90H
Batteries	V	2 x 12	2 x 12	2 x 12
Battery capacity	Ah	2 x 110	2 x 110	2 x 110
Cold cranking capacity, approx	A	1,000	1,000	1,000
Alternator rating	W/A	3 135/80	3 135/80	3 135/80
Starter motor output	kW	5.5	5.5	5.5

Brake system

Service brake: Volvo dual-circuit system with outboard mounted, hydraulically operated, fully sealed and circulating oil cooled wet disc brakes. Four operator selectable transmission disengagement settings while braking.

Parking brake: Dry disc brake mounted on the transmission output shaft. Applied by spring force, electro-hydraulically released with a switch on the instrument panel.

Secondary brake: Dual brake circuits with rechargeable accumulators.

Standard: The brake system complies with the requirements of ISO 3450, 71/320/EEC

		L60H	L70H	L90H
Number of brake discs per wheel		1	1	1
Accumulators	l (gal)	3 x 0.5 (3 x 0.13)	2 x 0.5+1 x 1.0 (2 x 0.13 + 1 x 0.26)	2 x 0.5+1 x 1.0 (2 x 0.13 + 1 x 0.26)
Accumulators for parking brake	l (gal)	1 x 0.5 (1 x 0.13)	1 x 1.0 (1 x 0.26)	1 x 1.0 (1 x 0.26)

Volvo L60H, L70H, L90H in detail

Cab

Instrumentation: All important information is centrally located in the operator's field of vision. Display for Contronic monitoring system.
Heater and defroster: Heater coil with filtered fresh air and fan with auto and 11 manual speed settings. Defroster vents for all window areas.
Operator's seat: Operator's seat with adjustable air suspension and retractable seatbelt. The seat is mounted on a bracket on the rear cab wall and floor. The forces from the retractable seatbelt are absorbed by the seat rails.
Standards: The cab is tested and approved according to ROPS (ISO 3471), FOPS (ISO 3449). The cab meets with requirements according to ISO 6055 (Operator overhead protection - Industrial trucks) and SAE J386 (Operator Restraint System).

		L60H	L70H	L90H
Emergency exit: Use emergency hammer to break window				
Ventilation	m ³ /min (yd ³ /min)	9 (11.8)	9 (11.8)	9 (11.8)
Heating capacity	kW	16	16	16

Sound Level

		L60H	L70H	L90H
Sound pressure level in cab according to ISO 6396				
L _{pA}	dB	68	68	68
External sound level according to ISO 6395 and EU Noise Directive 2000/14/EC				
L _{WA}	dB	104	105	105

Lift Arm System

Torque parallel linkage (TP-linkage) with high breakout torque and parallel lift-arm action.

		L60H	L70H	L90H
Lift cylinders		2	2	2
Cylinder bore	mm (in)	110 (4.3)	110 (4.3)	120 (4.7)
Piston rod diameter	mm (in)	70 (2.8)	70 (2.8)	70 (2.8)
Stroke	mm (in)	665 (26.2)	756 (29.8)	744 (28.9)
Tilt cylinder		1	1	1
Cylinder bore	mm (in)	150 (5.9)	160 (6.3)	180 (7.1)
Piston rod diameter	mm (in)	80 (3.1)	90 (3.5)	90 (3.5)
Stroke	mm (in)	444 (17.5)	432 (17)	430 (16.9)

Steering System

System supply: The steering system has priority feed from a load-sensing axial piston pump with variable displacement.
Steering cylinders: Two double-acting cylinders.

		L60H	L70H	L90H
Steering cylinders		2	2	2
Cylinder bore	mm (in)	70 (2.8)	70 (2.8)	80 (3.1)
Rod diameter	mm (in)	45 (1.8)	45 (1.8)	50 (2)
Stroke	mm (in)	386 (15.2)	386 (15.2)	345 (13.6)
Working pressure	MPa (bar)	21 (210)	21 (210)	21 (210)
Maximum flow	l/min (gal/min)	60 (15.9)	60 (15.9)	60 (15.9)
Maximum articulation	± °	40	40	40

Hydraulic system

Closed center load sensing hydraulic system with non pressurised hydraulic tank and pilot operated control valves.

System supply: Variable displacement axial piston pump supply the hydraulic system.

Valves: The central valve distributes pressure and flow out to the cooling fan, steering, brake, pilot and hydraulic system. Steering system gets priority over others.

Lift function: The valve has four positions; raise, hold, lower and float position. Automatic boom kickout position can be set to any position between maximum reach and full lifting height.

Tilt function: The valve has three functions; rollback, hold and dump.

Automatic tilt out/tilt in can be adjusted to the desired bucket angle.

Cylinders: Double-acting cylinders for all functions.

Filter: Full flow filtration through 10 micron (absolute) filter cartridge.



		L60H	L70H	L90H
Working pressure maximum, pump 2 for steering-, brake-, pilot- and working hydraulic system	MPa (bar)	26 (260)	26 (260)	31 (310)
Flow	l/min (gal/min)	145 (38.3)	154 (40.7)	171 (45.2)
at	MPa (bar)	10 (100)	10 (100)	10 (100)
engine speed	r/min (r/s)	1,900 (31.7)	1,900 (31.7)	1,900 (31.7)
Working pressure maximum, pump 3 for brake- and cooling fan system	MPa (bar)	21 (210)	21 (210)	21 (210)
Flow	l/min (gal/min)	33 (8.7)	33 (8.7)	33 (8.7)
at	MPa (bar)	10 (100)	10 (100)	10 (100)
engine speed	r/min (r/s)	1,900 (31.7)	1,900 (31.7)	1,900 (31.7)
Pilot system, working pressure	MPa (bar)	3.5 (35)	3.5 (35)	3.5 (35)
Cycle times				
Lift	s	5.4	5.5	5.7
Tilt	s	1.9	2.1	2.3
Lower, empty	s	2.7	2.9	4
Total cycle time	s	10	10.5	12

Service Refill

Service accessibility: Large, electrically operated easy-to-open hood covering whole engine compartment. Fluid filters and component breather air filters are located from ground level access and promote long service intervals. Machine contronics have possibility to monitor, log and analyze data to facilitate troubleshooting. A quick-fit adapter on the hydraulic tank provides faster hydraulic oil fill.

		L60H	L70H	L90H
Fuel tank	l (gal)	222 (58.6)	222 (58.6)	222 (58.6)
DEF/AdBlue® tank	l (gal)	20 (5.3)	20 (5.3)	20 (5.3)
Engine coolant	l (gal)	30 (7.9)	30 (7.9)	30 (7.9)
Hydraulic oil tank	l (gal)	90 (23.8)	90 (23.8)	90 (23.8)
Transmission oil (non lock-up)	l (gal)	21 (5.5)	21 (5.5)	21 (5.5)
Transmission oil (lock-up)	l (gal)	22 (5.8)	22 (5.8)	22 (5.8)
Engine oil	l (gal)	20 (5.2)	20 (5.2)	20 (5.2)
Axle oil front	l (gal)	25 (6.6)	35 (9.2)	35 (9.2)
Axle oil rear	l (gal)	25 (6.6)	27 (7.1)	27 (7.1)

Specifications

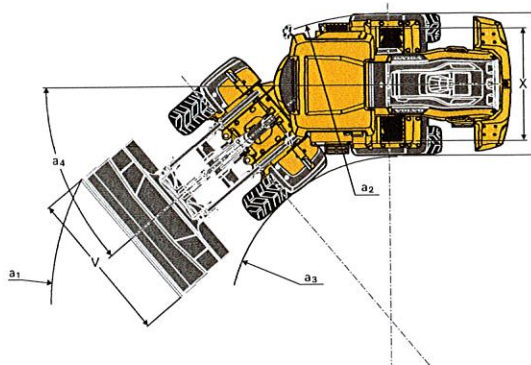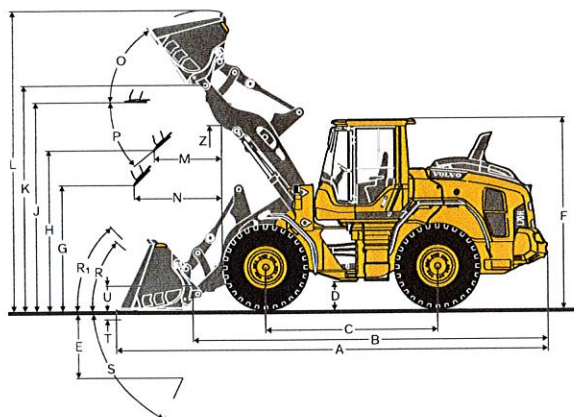

Tires 20.5 R25 L3

			L60H		L70H		L90H		L60H		L70H		L90H	
			Standard boom						Long boom					
B	mm	ft in	6,010	19'9"	6,080	19'11"	6,170	20'3"	6,520	21'5"	6,560	21'6"	6,600	21'8"
C	mm	ft in	3,000	9'10"	3,000	9'10"	3,050	10'0"	3,000	9'10"	3,000	9'10"	3,050	10'0"
D	mm	ft in	440	1'5"	450	1'6"	450	1'6"	430	1'5"	450	1'6"	440	1'5"
F	mm	ft in	3,270	10'9"	3,280	10'9"	3,280	10'9"	3,270	10'9"	3,280	10'9"	3,280	10'9"
G	mm	ft in	2,133	7'0"	2,134	7'0"	2,132	7'0"	2,134	7'0"	2,134	7'0"	2,132	7'0"
J	mm	ft in	3,550	11'8"	3,580	11'9"	3,730	12'3"	4,080	13'5"	4,050	13'3"	4,140	13'7"
K	mm	ft in	3,870	12'8"	3,870	12'8"	4,040	13'3"	4,380	14'4"	4,350	14'3"	4,460	14'8"
O	°		56		56		57		56		52		58	
Pmax	°		45		46		45		42		45		44	
R	°		43		43		44		45		44		47	
R1*	°		46		48		49		50		49		53	
S	°		79		68		67		79		73		65	
T	mm	ft in	123	0'5"	106	0'4"	112	0'4"	150	0'6"	112	0'4"	123	0'5"
U	mm	ft in	410	1'4"	450	1'6"	480	1'7"	590	1'11"	500	1'8"	570	1'10"
X	mm	ft in	1,900	6'3"	1,930	6'4"	1,960	6'5"	1,900	6'3"	1,930	6'4"	1,960	6'5"
Y	mm	ft in	2,430	7'12"	2,460	8'1"	2,490	8'2"	2,430	7'12"	2,460	8'1"	2,490	8'2"
Z	mm	ft in	3,210	10'6"	3,160	10'4"	3,460	11'4"	3,590	11'9"	3,500	11'6"	3,910	12'10"
a2	mm	ft in	5,340	17'6"	5,350	17'7"	5,430	17'10"	5,340	17'6"	5,350	17'7"	5,430	17'10"
a3	mm	ft in	2,900	9'6"	2,890	9'6"	2,940	9'8"	2,900	9'6"	2,890	9'6"	2,940	9'8"
a4	+°		40		40		40		40		40		40	

* Carry position SAE


Calculated with additional protective guarding

Where applicable, specifications and dimensions are according to ISO 7131, SAE J732, ISO 7546, SAE J742, ISO 14397, SAE J818

Tires: 20.5R25 L3

			L60H		L70H		L90H	
SAE-Load	kg	lb	3,450	7,606	3,990	8,796	4,600	10,141
Operating weight without load*	kg	lb	12,883	28,402	14,585	32,154	16,645	36,696
Grapple sales code			WLA82194		WLA80153		WLA80832	
A	m ²	yd ²	1.3	1.6	1.5	1.8	2.4	2.9
B	mm	ft in	3,412	11'2"	3,380	11'1"	3,487	11'5"
C	mm	ft in	1,483	4'10"	1,594	5'3"	1,703	5'7"
D	mm	ft in	2,929	9'7"	2,870	9'5"	2,865	9'5"
E	mm	ft in	1,175	3'10"	1,265	4'2"	1,319	4'4"
F	mm	ft in	1,532	5'0"	1,502	4'11"	1,441	4'9"
G	mm	ft in	2,350	7'9"	2,442	8'0"	2,740	8'12"
H	mm	ft in	4,333	14'3"	4,378	14'4"	4,613	15'2"
I	mm	ft in	5,878	19'3"	6,027	19'9"	6,664	21'10"
J	mm	ft in	1,997	6'7"	2,141	7'0"	2,786	9'2"
K	mm	ft in	2,080	6'10"	2,365	7'9"	2,990	9'10"
L	mm	ft in	1,709	5'7"	1,800	5'11"	2,131	6'12"
M	mm	ft in	7,861	25'9"	7,996	26'3"	8,469	27'9"

* Calculated with additional protective guarding

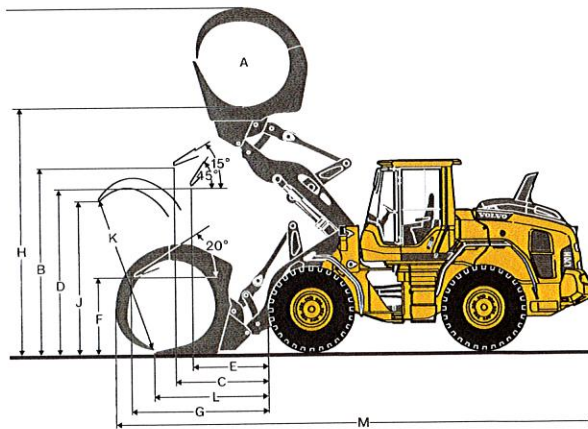

Specifications

Tires: 20.5R25 L3


			L60H	L70H	L90H		
Material handling arm sales code			92007	92007	92008		
A*	kg lb		1,800 3,968	2,150 4,740	2,760 6,085		
B*	kg lb		1,400 3,086	1,710 3,770	2,130 4,696		
C*	kg lb		1,150 2,535	1,400 3,086	1,740 3,836		
Static tipping load, straight	kg lb		3,238 7,139	3,583 7,899	4,289 9,456		
35deg. Turn at full turn	kg lb		2,910 6,415	3,222 7,103	3,834 8,453		
D	mm ft in		2,592 8'6"	2,716 8'11"	2,486 8'2"		
E	mm ft in		2,002 6'7"	2,106 6'11"	1,894 6'3"		
F	mm ft in		1,465 4'10"	1,549 5'1"	1,301 4'3"		
G	mm ft in		3,270 10'9"	3,323 10'11"	3,253 10'8"		
H	mm ft in		4,305 14'1"	4,358 14'4"	4,387 14'5"		
I	mm ft in		5,439 17'10"	5,492 18'0"	5,520 18'1"		
J	mm ft in		905 2'12"	1,269 4'2"	1,339 4'5"		
K	mm ft in		1,227 4'0"	1,744 5'9"	1,889 6'2"		
L	mm ft in		1,580 5'2"	2,266 7'5"	2,439 8'0"		
M	mm ft in		2,258 7'5"	2,176 7'2"	2,051 6'9"		
N	mm ft in		3,241 10'8"	3,095 10'2"	3,043 9'12"		
O	mm ft in		4,319 14'2"	4,102 13'5"	4,034 13'3"		
P	mm ft in		1,512 5'0"	1,523 5'0"	1,520 5'0"		
Q	mm ft in		5,286 17'4"	5,302 17'5"	5,403 17'9"		
R	mm ft in		6,171 20'3"	6,174 20'3"	6,370 20'11"		
S	mm ft in		7,139 23'5"	7,129 23'5"	7,336 24'1"		

Operating weight kg lb 11,885 26,202 13,451 29,654 14,833 32,701 without load

* Op. load at full turn + tipping position

Tipping loads calculated for max. arm length

**Calculated with additional protective guarding

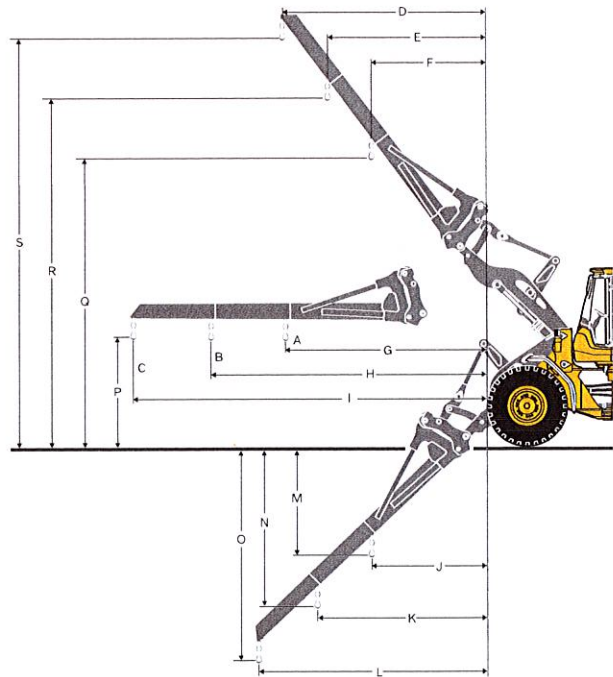


Tires: 20.5R25 L3

			L60H	L70H	L90H		
Fork frame sales code			83768	83768	83770		
Fork tines sales code (R/L)			80042/80043	80042/80044	80106/80107		
Static tipping load, straight	kg lb		6,930 15,278	7,576 16,702	8,904 19,630		
35deg. Turn at full turn	kg lb		6,230 13,735	6,809 15,011	7,947 17,520		
at load center distance*	mm ft in		600 2'0"	600 2'0"	600 2'0"		
A	mm ft in		798 2'7"	841 2'9"	932 3'1"		
B	mm ft in		1,567 5'2"	1,616 5'4"	1,679 5'6"		
C	mm ft in		-38 -1'11"	-52 -1'10"	-4 -1'12"		
D	mm ft in		1,831 6'0"	1,859 6'1"	1,800 5'11"		
E	mm ft in		3,713 12'2"	3,736 12'3"	3,841 12'7"		
F	mm ft in		700 2'4"	767 2'6"	641 2'1"		
Operating weight without load	kg lb		11,965 26,378	13,531 29,831	14,928 32,911		

* Firm and level ground

**Calculated with additional protective guarding

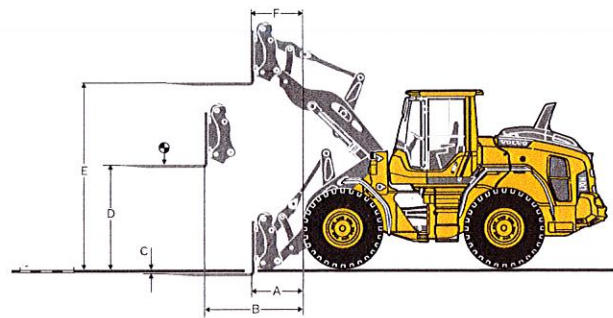

Volvo L60H specifications

		General purpose						Grading	Light material		LongBoom**	
L60H* MICH 20.5R25 XHA2 L3		WLA86398	WLA86423	WLA86401	WLA86405	WLA86410	WLA86411	WLA92476	WLA92564	WLA92565	WLA86410	
		1.9 m³ (2.5 yd³) HD STE H BOE	2.0 m³ (2.6 yd³) STE H T	2.1 m³ (2.7 yd³) HD STE H BOE	2.3 m³ (3.0 yd³) HD STE H BOE	2.1 m³ (2.7 yd³) HD STE P BOE	2.3 m³ (3.0 yd³) HD STE P BOE	1.7 m³ (2.2 yd³) GRB H BOE	3.1 m³ (4.1 yd³) LM H BOE	5 m³ (6.5 yd³) LM H BOE	2.1 m³ (2.7 yd³) HD STE P BOE	
Volume, heaped ISO/SAE	m³ yd³	1.9 2.5	2.0 2.6	2.1 2.7	2.3 3.0	2.1 2.7	2.3 3.0	1.7 2.2	3.1 4.1	5.0 6.5	2.1 2.7	
Volume at 110% fill factor	m³ yd³	2.0 2.7	2.2 2.9	2.3 3.0	2.5 3.3	2.3 3.0	2.5 3.3	1.9 2.4	3.4 4.5	5.5 7.2	2.3 3.0	
Static tipping load, straight	kg lb	8,940 19,710	9,028 19,910	8,831 19,470	8,770 19,330	9,310 20,520	9,230 20,340	7,740 17,060	8,450 18,640	8,450 18,640	-1,640 -3,600	
at 35° turn	kg lb	7,996 17,630	8,079 17,810	7,887 17,390	7,830 17,260	8,340 18,400	8,270 18,230	6,920 15,260	7,540 16,630	7,510 16,570	-1,500 -3,320	
at full turn	kg lb	7,718 17,020	7,800 17,200	7,609 16,780	7,550 16,650	8,060 17,770	7,990 17,610	6,680 14,730	7,280 16,040	7,240 15,960	-1,470 -3,230	
Breakout force	kN lbf	81.8 18,400	82.8 18,610	80.4 18,090	75.0 16,870	84.8 19,060	80.9 18,190	60.1 13,500	61.7 13,870	53.7 12,080	8.8 1,980	
A	mm ft in	7,316 24'	7,520 24' 8"	7,338 24' 1"	7,430 24' 5"	7,270 23' 10"	7,330 24' 1"	7,650 25' 1"	7,680 25' 2"	7,900 25' 11"	520 1' 9"	
E	mm ft in	1,116 3' 8"	1,302 4' 3"	1,136 3' 9"	1,220 4'	1,070 3' 6"	1,130 3' 8"	1,400 4' 7"	1,470 4' 10"	1,700 5' 7"	40 2"	
H	mm ft in	2,836 9' 4"	2,705 8' 10"	2,811 9' 3"	2,760 9' 1"	2,850 9' 4"	2,810 9' 3"	2,520 8' 3"	2,580 8' 6"	2,440 8' 0"	530 1' 9"	
L	mm ft in	5,032 16' 6"	5,084 16' 8"	5,069 16' 8"	5,180 17' 0"	5,060 16' 7"	5,120 16' 10"	4,530 14' 10"	5,290 17' 4"	5,490 18' 0"	510 1' 8"	
M	mm ft in	1,054 3' 5"	1,192 3' 11"	1,056 3' 6"	1,130 3' 9"	1,000 3' 3"	1,040 3' 5"	1,130 3' 8"	1,320 4' 4"	1,500 4' 11"	10 0"	
N	mm ft in	1,578 5' 2"	1,632 5' 4"	1,584 5' 2"	1,610 5' 3"	1,560 5' 2"	1,580 5' 2"	1,490 4' 11"	1,630 5' 4"	1,670 5' 6"	450 1' 5"	
V	mm in	2,500 98"	2,500 98"	2,650 104"	2,500 98"	2,500 98"	2,500 98"	2,500 98"	2,550 100"	2,650 104"	2,500 98"	
a1 clearance circle	mm ft in	11,569 37' 11"	11,665 38' 3"	11,719 38' 5"	11,620 38' 2"	11,580 38'	11,600 38' 1"	11,970 39' 3"	11,840 38' 10"	12,060 39' 7"	430 1' 5"	
Operating weight	kg lb	12,299 27,120	12,270 27,060	12,388 27,320	12,400 27,350	12,070 26,620	12,110 26,700	12,250 27,000	12,440 27,420	12,720 28,060	340 750	

*Calculated with additional protective guarding. (WL86009, WL86010)


**Calculated with logging counterweight.

Note: This only applies to genuine Volvo attachments.

Bucket Selection Chart

The chosen bucket is determined by the density of the material and the expected bucket fill factor. The actual bucket volume is often larger than the rated capacity, due to the features of the TP linkage, including an open bucket design, good rollback angles in all positions and good bucket filling performance. The example represents a standard boom configuration. Example: Sand and gravel. Fill factor ~ 105%. Density 1.5 t/m³ (2,530 lb/yd³). Result: The 2.1 m³ (2.8 yd³) bucket carries 2.2 m³ (2.9 yd³). For optimum stability always consult the bucket selection chart.



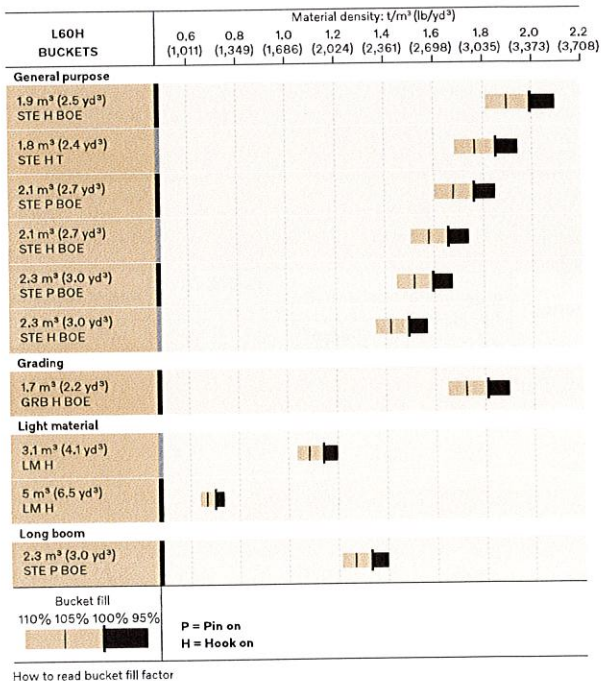






Material	Bucket fill, %	Material density		ISO/SAE bucket volume		Actual volume	
		t/m³	lb/yd³	m³	yd³	m³	yd³
Earth/Clay	~ 110	~ 1.55	~ 2,610	1.9	2.5	2.1	2.8
		~ 1.40	~ 2,360	2.1	2.8	2.3	3.0
		~ 1.30	~ 2,190	2.3	3.0	2.5	3.3
Sand/Gravel	~ 105	~ 1.65	~ 2,780	1.9	2.5	2.0	2.6
		~ 1.50	~ 2,530	2.1	2.8	2.2	2.9
		~ 1.35	~ 2,280	2.3	3.0	2.1	2.8
Aggregate	~ 100	~ 1.75	~ 2,950	1.9	2.5	1.9	2.5
		~ 1.55	~ 2,610	2.1	2.8	2.1	2.8
		~ 1.55	~ 2,610	2.3	3.0	2.3	3.0
Rock	≤ 100	~ 1.70	~ 2,870	1.7	2.2	1.7	2.2



Supplemental Operating Data

		Standard boom				Long boom	
Tires 20.5 R25 L3		17.5 R25 L2		20.5 R25 L2		600/65 R25 L3	
Width over tires	mm in	-130	-5.1	+8	+0.3	+96	+3.8
Ground clearance	mm in	-68	-2.7	-10	-0.4	-30	-1.2
Tipping load, full turn	kg lb	-337	-743	-166	-366	-72	-159
Operating weight	kg lb	-544	-1,199	-112	-247	+8	+18
Calculated with 2.3 m³ (3.0 yd³) STE P BOE, additional protective guarding							

Volvo L70H specifications

L70H* MICH 20.5R25 XHA2 L3			General purpose										Grading		Light material			LongBoom**				
																						
			WLA87535	WLA86405	WLA86401	WLA86404	WLA86407	WLA86413	WLA92477	WLA80562	WLA80634	WLA86413										
			2.3 m³ (3.0 yd³) STE H BOE	2.2 m³ (2.9 yd³) HD STE H T	2.0 m³ (2.7 yd³) HD STE H BOE	2.2 m³ (2.8 yd³) HD STE H BOE	2.3 m³ (3.0 yd³) HD STE H BOE	2.2 m³ (2.8 yd³) HD STE P BOE	2.2 m³ (2.9 yd³) GRB H BOE	3.4 m³ (4.4 yd³) LM H	6.4 m³ (8.4 yd³) LM H	2.2 m³ (2.9 yd³) HD STE P BOE										
Volume, heaped ISO/SAE	m3	yd3	2.4	3.1	2.2	2.9	2.1	2.7	2.3	3.0	2.4	3.1	2.3	3.0	2.2	2.9	3.4	4.4	6.4	8.4	2.3	3.0
Volume at 110% fill factor	m3	yd3	2.6	3.5	2.4	3.2	2.3	3.0	2.5	3.3	2.6	3.5	2.5	3.3	2.4	3.2	3.7	4.9	7.0	9.2	2.5	3.3
Static tipping load, straight	kg	lb	9,740	21,480	9,840	21,710	9,770	21,550	9,710	21,410	9,670	21,320	10,310	22,730	7,920	17,470	9,253	20,400	8,830	19,460	-1,550	-3,400
at 35° turn	kg	lb	8,710	19,200	8,810	19,420	8,740	19,270	8,680	19,130	8,640	19,050	9,240	20,370	7,040	15,530	8,246	18,180	7,790	17,180	-1,430	-3,140
at full turn	kg	lb	8,400	18,530	8,500	18,740	8,430	18,590	8,370	18,460	8,340	18,380	8,920	19,680	6,780	14,950	7,949	17,530	7,490	16,510	-1,390	-3,070
Breakout force	kN	lbf	87.8	19,740	91.3	20,520	92.8	20,860	88.5	20,110	87.6	19,690	98.7	22,200	62.7	14,090	71.7	16,130	53.9	12,110	-1.8	-410
A	mm	ft in	7,510	24' 8"	7,700	25' 3"	7,440	24' 5"	7,490	24' 7"	7,520	24' 8"	7,370	24' 2"	7,950	26' 1"	7,776	25' 6"	8,330	27' 4"	470	1' 7"
E	mm	ft in	1,210	4' 0"	1,360	4' 6"	1,140	3' 9"	1,190	3' 11"	1,210	4' 0"	1,080	3' 6"	1,670	5' 6"	1,466	4' 10"	1,960	6' 5"	20	0' 1"
H	mm	ft in	2,740	9' 0"	2,620	8' 7"	2,790	9' 2"	2,760	9' 0"	2,740	9' 0"	2,830	9' 3"	2,360	7' 9"	2,531	8' 4"	2,160	7' 1"	490	1' 8"
L	mm	ft in	5,170	16' 11"	5,220	17' 1"	5,110	16' 9"	5,170	17' 0"	5,200	17' 1"	5,100	16' 9"	4,720	15' 6"	5,455	17' 11"	5,790	19' 0"	470	1' 6"
M	mm	ft in	1,160	3' 10"	1,270	4' 2"	1,110	3' 8"	1,140	3' 9"	1,160	3' 10"	1,060	3' 6"	1,350	4' 5"	1,339	4' 5"	1,720	5' 8"	20	0' 1"
N	mm	ft in	1,660	5' 5"	1,690	5' 7"	1,640	5' 4"	1,650	5' 5"	1,660	5' 5"	1,610	5' 3"	1,570	5' 2"	1,680	5' 6"	1,720	5' 8"	390	1' 4"
V	mm	in	2,650	104"	2,500	98"	2,650	104"	2,650	104"	2,650	104"	2,650	104"	2,650	104"	2,650	104"	2,750	108"	2,650	104"
a1 clearance circle	mm	ft in	11,800	38' 8"	11,750	38' 7"	11,760	38' 7"	11,790	38' 8"	11,800	38' 9"	11,740	38' 6"	12,320	40' 5"	11,980	39' 4"	12,410	40' 9"	370	1' 3"
Operating weight	kg	lb	13,950	30,760	13,920	30,700	13,950	30,770	13,990	30,840	14,000	30,880	13,720	30,260	14,240	31,400	14,193	31,290	14,730	32,490	510	1120

*Calculated with additional protective guarding. (WLA86009,WLA86010)


**Calculated with logging counterweight.

Note: This only applies to genuine Volvo attachments.

Bucket Selection Chart

The chosen bucket is determined by the density of the material and the expected bucket fill factor. The actual bucket volume is often larger than the rated capacity, due to the features of the TP linkage, including an open bucket design, good rollback angles in all positions and good bucket filling performance. The example represents a standard boom configuration. Example: Sand and gravel. Fill factor ~ 105%. Density 1.55 t/m³ (2,610 lb/yd³). Result: The 2.6 m³ (3.4 yd³) bucket carries 2.7 m³ (3.5 yd³). For optimum stability always consult the bucket selection chart.

Material	Bucket fill, %	Material density		ISO/SAE bucket volume		Actual volume	
		t/m³	lb/yd³	m³	yd³	m³	yd³
Earth/Clay	~ 110	~ 1.55	~ 2,610	2.5	3.3	2.7	3.5
		~ 1.45	~ 2,440	2.6	3.4	2.9	3.8
		~ 1.40	~ 2,360	2.8	3.7	3.1	4.0
Sand/Gravel	~ 105	~ 1.65	~ 2,780	2.5	3.3	2.6	3.4
		~ 1.55	~ 2,610	2.6	3.4	2.7	3.5
		~ 1.50	~ 2,530	2.8	3.7	2.9	3.7
Aggregate	~ 100	~ 1.75	~ 2,950	2.5	3.3	2.5	3.3
		~ 1.65	~ 2,780	2.6	3.4	2.6	3.4
		~ 1.60	~ 2,700	2.8	3.4	2.8	3.7
Rock	≤100	~ 1.80	~ 3,030	2.2	2.9	2.2	2.9

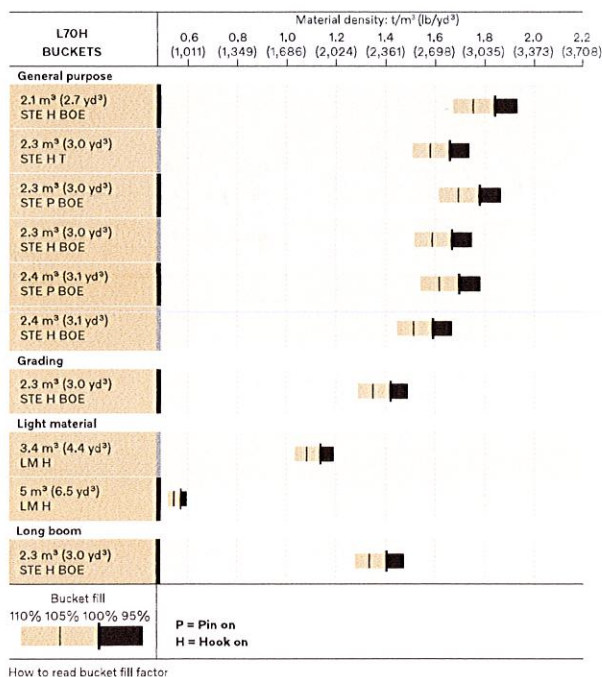

Supplemental Operating Data

			Standard boom				Long boom	
Tires 20.5 R25 L3			20.5 R25 L2		600/65 R25 L3		600/65 R25 L3	
Width over tires	mm ft in		+8	0.3	+96	3.8	+96	3.8
Ground clearance	mm ft in		-8	-0.3	-32	-1.3	-24	-0.9
Tipping load, full turn	kg lb		-62	-137	-39	-86	+9	+20
Operating weight	kg lb		-113	-249	+7	+15	+4	+9
Calculated with 2.3 m³ (3.0 yd³) STE H BOE, additional protective guarding								

Volvo L90H specifications

L90H* MICH 20.5R25 XHA2 L3	General purpose						Grading	Light material		LongBoom**
	WLA86299	WLA86303	WLA86319	WLA86304	WLA86320	WLA86331	WLA85404	WLA92687	WLA92683	WLA86319
	2.3 m³ (3.0 yd³) HD STE H BOE	2.6 m³ (3.4 yd³) HD STE H T	2.7 m³ (3.5 yd³) HD STE P BOE	2.8 m³ (3.7 yd³) HD STE H BOE	2.8 m³ (3.7 yd³) HD STE P BOE	2.8 m³ (3.7 yd³) STE H BOE	2.8 m³ (3.7 yd³) GRB H BOE	4.1 m³ (5.4 yd³) LM H	7.0 m³ (9.2 yd³) LM H	2.7 m³ (3.5 yd³) HD STE P BOE
Volume, heaped ISO/SAE	m³ yd³ 2.3 3.0	2.6 3.4	2.7 3.5	2.8 3.7	2.8 3.7	2.8 3.7	2.8 3.7	4.1 5.4	7.0 9.2	2.7 3.5
Volume at 110% fill factor	m³ yd³ 2.5 3.3	2.9 3.7	3.0 3.9	3.1 4.0	3.1 4.0	3.1 4.0	3.1 4.0	4.5 5.9	7.7 10.1	3.0 3.9
Static tipping load, straight	kg lb 11,520 25,390	11,610 25,610	11,970 26,390	11,320 24,960	11,930 26,310	11,430 25,200	9,250 20,390	10,810 23,840	10,530 23,210	-1,110 -2,440
at 35° turn	kg lb 10,220 22,540	10,310 22,740	10,640 23,450	10,030 22,120	10,600 23,380	10,140 22,360	8,170 18,020	9,550 21,060	9,250 20,390	-1,030 -2,260
at full turn	kg lb 9,840 21,700	9,930 21,890	10,240 22,590	9,650 21,290	10,210 22,510	9,760 21,530	7,860 17,330	9,180 20,230	8,870 19,550	-1,000 -2,220
Breakout force	kN lbf 138.8 31,030	135.9 30,560	140.1 31,510	126.4 28,430	137.6 30,940	126.4 28,430	92.2 20,730	100.6 22,610	87.0 19,560	1.8 410
A	mm ft in 7,560 24' 10"	7,850 25' 9"	7,560 24' 10"	7,690 25' 3"	7,580 24' 11"	7,690 25' 3"	8,170 26' 10"	8,040 26' 5"	8,350 27' 5"	410 1' 4"
E	mm ft in 1,170 3' 10"	1,410 4' 8"	1,160 3' 9"	1,280 4' 2"	1,180 3' 10"	1,280 4' 2"	1,760 5' 9"	1,590 5' 3"	1,860 6' 1"	-10 0"
H	mm ft in 2,910 9' 7"	2,730 8' 11"	2,920 9' 7"	2,830 9' 4"	2,910 9' 7"	2,830 9' 4"	2,400 7' 11"	2,610 8' 7"	2,410 7' 11"	420 1' 4"
L	mm ft in 5,310 17' 5"	5,420 17' 10"	5,360 17' 7"	5,450 17' 11"	5,390 17' 8"	5,420 17' 10"	4,900 16' 1"	5,640 18' 6"	5,840 19' 2"	420 1' 4"
M	mm ft in 970 3' 2"	1,170 3' 10"	970 3' 2"	1,070 3' 6"	990 3' 3"	1,070 3' 6"	1,200 3' 11"	1,350 4' 5"	1,550 5' 1"	-70 -3"
N	mm ft in 1,660 5' 5"	1,730 5' 8"	1,650 5' 5"	1,700 5' 7"	1,660 5' 5"	1,700 5' 7"	1,520 5' 0"	1,710 5' 7"	1,700 5' 7"	360 1' 2"
V	mm in 2,650 108"	2,750 108"	2,750 108"	2,750 108"	2,750 108"	2,750 108"	2,880 113"	2,750 108"	3,000 118"	2,750 108"
a1 clearance circle	mm ft in 12,040 39' 6"	12,180 40'	12,040 39' 6"	12,100 39' 8"	12,050 39' 6"	12,100 39' 8"	12,770 41' 11"	12,300 40' 4"	12,700 41' 8"	300 1' 0"
Operating weight	kg lb 15,470 34,110	15,460 34,080	15,330 33,810	15,580 34,350	15,350 33,850	15,490 34,160	15,680 34,620	15,840 34,920	16,270 35,870	790 1,730

*Calculated with additional protective guarding. (WL86009, WL86010)


**Calculated with logging counterweight.

Note: This only applies to genuine Volvo attachments.

Bucket Selection Chart

The chosen bucket is determined by the density of the material and the expected bucket fill factor. The actual bucket volume is often larger than the rated capacity, due to the features of the TP linkage, including an open bucket design, good rollback angles in all positions and good bucket filling performance. The example represents a standard boom configuration. Example: Sand and gravel. Fill factor ~ 105%. Density 1.55 t/m³ (2,610 lb/yd³). Result: The 2.6m³ (3.4yd³) bucket carries 2.7m³ (3.5 yd³). For optimum stability always consult the bucket selection chart.

Material	Bucket fill, %	Material density		ISO/SAE bucket volume		Actual volume	
		t/m³	lb/yd³	m³	yd³	m³	yd³
Earth/Clay	~ 110	~ 1.55	~ 2,610	2.5	3.3	2.7	3.5
		~ 1.45	~ 2,440	2.6	3.4	2.9	3.8
		~ 1.40	~ 2,360	2.8	3.7	3.1	4.0
Sand/Gravel	~ 105	~ 1.65	~ 2,780	2.5	3.3	2.6	3.4
		~ 1.55	~ 2,610	2.6	3.4	2.7	3.5
		~ 1.50	~ 2,530	2.8	3.7	2.9	3.7
Aggregate	~ 100	~ 1.75	~ 2,950	2.5	3.3	2.5	3.3
		~ 1.65	~ 2,780	2.6	3.4	2.6	3.4
		~ 1.60	~ 2,700	2.8	3.7	2.8	3.7
Rock	≤ 100	~ 1.80	~ 3,030	2.2	2.9	2.2	2.9

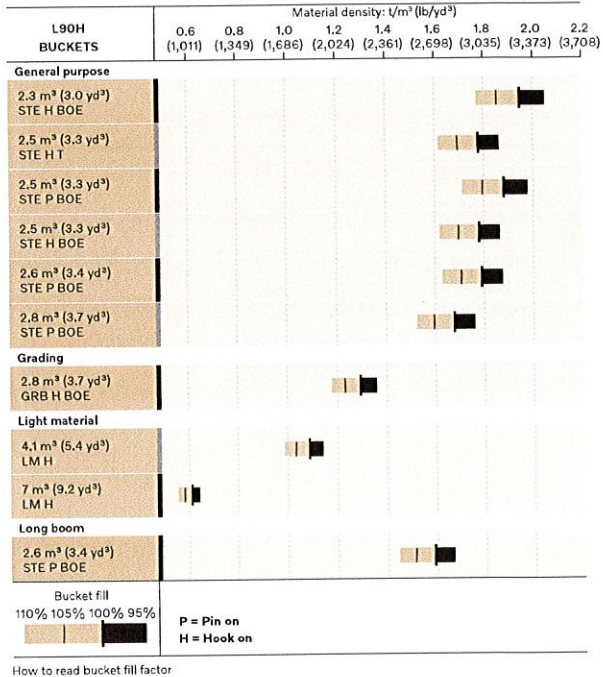

Supplemental Operating Data

			Standard boom				Long boom	
Tires 20.5 R25 L3			20.5 R25 L2		650/65 R25 L3		650/65 R25 L3	
Width over tires	mm	ft in	+4	+0.2	+164	+6.5	+164	+6.5
Ground clearance	mm	ft in	-8	-0.3	-4	-0.2	+12	+0.5
Tipping load, full turn	kg	lb	-70	-154	+315	+694	+287	+633
Operating weight	kg	lb	-111	-245	+545	+1,202	+543	+1,197
Calculated with 2.6 m³ (3.4 yd³) STE P BOE, additional protective guarding								

Equipment

STANDARD EQUIPMENT

	L60H	L70H	L90H
Engine			
Exhaust after-treatment system	•	•	•
3-stage air cleaner, pre-cleaner, primary and secondary filter	•	•	•
Indicator glass for coolant level	•	•	•
Preheating of induction air	•	•	•
Fuel pre-filter with water trap	•	•	•
Fuel filter	•	•	•
Crank case breather oil trap	•	•	•
Exhaust heat ventilation	•	•	•
Delayed engine shutdown	•	•	•
Tires			
20.5R25	•	•	•
Drivetrain			
Automatic Power Shift	•	•	•
Fully automatic gear shifting, 1-4	•	•	•
PWM-controlled gear shifting	•	•	•
Forward and reverse switch by hydraulic lever console	•	•	•
Rimpull control	•	•	•
Indicator glass for transmission oil level	•	•	•
Differentials: Front, 100% hydraulic diff lock. Rear, conventional	•	•	•
Electrical system			
24 V, pre-wired for optional accessories	•	•	•
Alternator 80A/3135W	•	•	•
Battery disconnect switch	•	•	•
Maintenance-free batteries	•	•	•
Battery box, steel	•	•	•
Fuel gauge	•	•	•
Electric horn	•	•	•
Instrument cluster:			
Fuel level	•	•	•
Diesel Exhaust Fluid/AdBlue level	•	•	•
Transmission temperature	•	•	•
Coolant temperature	•	•	•
Instrument lighting	•	•	•
Lighting:			
Twin halogen front headlights with high and low beams	•	•	•
Parking lights	•	•	•
Double brake and tail lights	•	•	•
Turn signals with flashing hazard light function	•	•	•
Halogen work lights (2 front and 2 rear)	•	•	•
CoPilot	•	•	•
Rearview camera in CoPilot	•	•	•
Max Boom Height	•	•	•

STANDARD EQUIPMENT

	L60H	L70H	L90H
Contronic monitoring system			
Contronic display	•	•	•
Fuel consumption	•	•	•
Diesel Exhaust Fluid/AdBlue consumption	•	•	•
Ambient temperature	•	•	•
Clock	•	•	•
Test function for warning and indicator lights	•	•	•
Brake test	•	•	•
Warning and indicator lights:	•	•	•
Battery charging	•	•	•
Parking brake	•	•	•
Warning and display message:	•	•	•
Regeneration	•	•	•
Engine coolant temperature	•	•	•
Charge air temperature	•	•	•
Engine oil temperature	•	•	•
Engine oil pressure	•	•	•
Transmission oil temperature	•	•	•
Transmission oil pressure	•	•	•
Hydraulic oil temperature	•	•	•
Brake pressure	•	•	•
Parking brake applied	•	•	•
Brake charging	•	•	•
Overspeed at direction change	•	•	•
Axle oil temperature	•	•	•
Steering pressure	•	•	•
Crank case pressure	•	•	•
Attachment lock open	•	•	•
Level warnings:			
Fuel level	•	•	•
Diesel Exhaust Fluid/AdBlue level	•	•	•
Engine coolant level	•	•	•
Transmission oil level	•	•	•
Hydraulic oil level	•	•	•
Washer fluid level	•	•	•
Engine torque reduction in case of malfunction indication:			
High engine coolant temperature	•	•	•
High engine oil temperature	•	•	•
Low engine oil pressure	•	•	•
High crank case pressure	•	•	•
High charge air temperature	•	•	•
Engine shutdown to idle in case of malfunction indication:			
High transmission oil temperature	•	•	•
Slip in transmission clutches	•	•	•
Key pad, background lit	•	•	•
Start interlock when gear is engaged	•	•	•
Hydraulic system			
Boom suspension system	•	•	•
Main valve, double acting 2-spool with hydraulic pilots	•	•	•
Variable displacement axial piston pumps (2) for:			
Working hydraulics, pilot hydraulics, steering system, brakes	•	•	•
Cooling fan, brakes	•	•	•
Hydraulic control levers	•	•	•
Hydraulic lever lock	•	•	•
Automatic boom kick-out	•	•	•
Automatic bucket positioner	•	•	•
Double acting hydraulic cylinders	•	•	•
Indicator glass for hydraulic oil level	•	•	•
Hydraulic oil cooler	•	•	•

STANDARD EQUIPMENT

	L60H	L70H	L90H
Brake system			
Dual brake circuits	•	•	•
Dual brake pedals	•	•	•
Secondary brake system	•	•	•
Parking brake, electrical-hydraulic	•	•	•
Brake wear indicators	•	•	•
Outboard mounted circulating oil cooled wet disc brakes on all four wheels	•	•	•
Cab			
ROPS (ISO 3471), FOPS (ISO 3449)	•	•	•
Single key kit door/start	•	•	•
Acoustic inner lining	•	•	•
Cigarette lighter, 24 V power outlet	•	•	•
Lockable door	•	•	•
Cab heating with fresh air inlet and defroster	•	•	•
Fresh air inlet with two filters	•	•	•
Automatic heat control	•	•	•
Floor mat	•	•	•
Dual interior lights	•	•	•
Interior rearview mirrors	•	•	•
Dual exterior rearview mirrors	•	•	•
Sliding window, right side	•	•	•
Tinted safety glass	•	•	•
Retractable seatbelt (SAE J386)	•	•	•
Adjustable steering wheel	•	•	•
Storage compartment	•	•	•
Document pocket	•	•	•
Sun visor	•	•	•
Beverage holder	•	•	•
Windshield washer front and rear	•	•	•
Windshield wipers front and rear	•	•	•
Interval function for front and rear wipers	•	•	•
Foot step, left side (toolbox lockable included)	•	•	•
Service and maintenance			
Engine oil remote drain and fill	•	•	•
Transmission oil remote drain and fill	•	•	•
Sliding hydraulic oil cooler and AC-condenser	•	•	•
Lubrication manifolds, ground accessible	•	•	•
Pressure test ports: transmission and hydraulic, quick connects	•	•	•
Service platforms with anti-slip surfaces	•	•	•
Quick-fit hydraulic oil fill	•	•	•
CareTrack	•	•	•
Telematics, 6 -year subscription	•	•	•
Toolbox, lockable	•	•	•
External equipment			
Basic fenders, front and rear	•	•	•
Viscous cab mounts	•	•	•
Rubber engine and transmission mounts	•	•	•
Engine hood, electronically openable	•	•	•
Frame, joint lock	•	•	•
Vandalism lock for engine compartment	•	•	•
Lifting eyes	•	•	•
Tie down eyes	•	•	•
Tow hitch	•	•	•
Counterweight, pre-drilled for optional guards	•	•	•

OPTIONAL EQUIPMENT

	L60H	L70H	L90H
Engine			
Air pre-cleaner, cyclone type	•	•	•
Air pre-cleaner, oil-bath type	•	•	•
Air pre-cleaner, turbo type	•	•	•
Engine auto shut down	•	•	•
Engine block heater, 120V / 230V	•	•	•
Fuel heater	•	•	•
Fuel fill strainer	•	•	•
Hand throttle control	•	•	•
Max. fan speed, hot climate	•	•	•
Reversible cooling fan	•	•	•
Drivetrain			
Lock-up torque converter	•	•	•
Rear axle with limited slip	•	•	•
Speed limiter, 20 km/h	•	•	•
Speed limiter, 30 km/h	•	•	•
Speed limiter, 40 km/h	•	•	•
Hydraulic system			
Arctic kit: Attachment locking, pilot hoses and hydraulic oil	•	•	•
Attachment bracket, cast, visibility-optimized	•	•	•
Attachment bracket, side-tilting	•	•	•
Separate attachment locking, long boom	•	•	•
Separate attachment locking, standard boom	•	•	•
Single acting lifting function	•	•	•
HD load-sensing hydraulics, pump kit included	—	•	—
Hydraulic fluid, biodegradable, Volvo	•	•	•
Hydraulic fluid, fire resistant	•	•	•
Hydraulic fluid, for hot climate	•	•	•
Hydraulic, 3 functions, standard/long boom	•	•	•
Hydraulic, 4 functions, standard/long boom	•	•	•
Detent for 3rd hydraulic function	•	•	•
Adjustable flow for 3rd hydraulic function	•	•	•
Single lever control, 2 functions	•	•	•
Single lever control, 3 functions	•	•	•
Hydraulic, 2 functions Electro-servo, std/long boom	•	•	•
Hydraulic, 3 functions Electro-servo, std/long boom	•	•	•
Hydraulic, 4 functions Electro-servo, std/long boom	•	•	•
Single lever control, 2 funct Electro-servo, std/long boom	•	•	•
Single lever control, 3 funct Electro-servo, std/long boom	•	•	•
Single lever control, 4 funct Electro-servo, std/long boom	•	•	•
Brake system			
Stainless steel, brake lines	—	•	•
Axle oil cooler	—	•	•
Parking brake alarm, audible	•	•	•

Equipment

OPTIONAL EQUIPMENT

	L60H	L70H	L90H
Cab			
ACC control panel, with Fahrenheit scale	•	•	•
Anchorage for Operator's manual	•	•	•
Asbestos dust protection filter	•	•	•
Automatic Climate Control, ACC	•	•	•
Automatic Climate Control, ACC, corrosion protection condenser	•	•	•
Cab air pre-cleaner, cyclone type	•	•	•
Carbon filter - cab	•	•	•
Remote door opener	•	•	•
Lunch box holder	•	•	•
Operator's seat, Volvo air-suspended, heavy-duty, high back, heated	•	•	•
Operator's seat, Volvo air-susp, 3-point seatbelt	•	•	•
Operator's seat, Premium Comfort ISRI	•	•	•
Operator's seat, Premium Comfort ISRI 3-point seat belt	•	•	•
Armrest, operator's seat, ISRI, left only	•	•	•
Armrest, operator's seat, Volvo, left	•	•	•
Safety belt, 3" (75mm) width	•	•	•
Safety belt warning	•	•	•
Radio installation kit including 12 volt outlet, left-side	•	•	•
Radio installation kit including 12 volt outlet, right-side	•	•	•
Radio installation kit, 12V, for USA	•	•	•
Radio with AUX, Bluetooth and USB connection	•	•	•
DAB Radio	•	•	•
Subwoofer	•	•	•
Forward view mirror	•	•	•
Rear view mirrors, el.adjusted and heated	•	•	•
Rear view mirrors, long arm right	•	•	•
Rear view mirrors, el.adjusted and heated, long arm right	•	•	•
Steering wheel knob	•	•	•
Sun blinds, rear windows	•	•	•
Sun blinds, side windows	•	•	•
Timer cab heating	•	•	•
Universal door/ignition key	•	•	•
Window, sliding, door	•	•	•
Cab, Hot applications. Roof, steel	•	•	•
Fire extinguisher cab	•	•	•
Outside steel protection cab	•	•	•
Rear view mirrors long arm, cab	•	•	•
Reinforced windshield, flat	•	•	•
Service and maintenance			
Automatic lubrication system	•	•	•
Automatic lubrication system for long boom	•	•	•
Oil sampling valve	•	•	•
Refill pump for automatic lubrication system	•	•	•
Tool kit	•	•	•
Wheel nut wrench kit	•	•	•
Electrical			
Battery disconnect switch, additional in cab	•	•	•
Anti-theft device	•	•	•
Headlights, assym. left	•	•	•
Headlights, assym. right LED	•	•	•
Headlights, assym. left LED	•	•	•

OPTIONAL EQUIPMENT

	L60H	L70H	L90H
Emergency stop	•	•	•
License plate holder, lighting	•	•	•
Reduced function working lights when reverse gear activated	•	•	•
Side marker lamps	•	•	•
Forward camera, colour	•	•	•
Rear view camera including monitor, colour	•	•	•
Rear view mirrors, long arm, right side	•	•	•
Rearview mirrors, adjustable, el. heated	•	•	•
Reverse alarm	•	•	•
Reverse lights	•	•	•
Reversing warning light	•	•	•
Reverse warning light, strobe lightning	•	•	•
Warning beacon (flasher), LED automatic	•	•	•
Warning beacon (flasher), LED	•	•	•
Seatbelt indicator, external	•	•	•
Working lights, attachments, 1 LED	•	•	•
Warning beacon LED	•	•	•
Warning beacon LED automatic	•	•	•
LED Head Light	•	•	•
LED tail light	•	•	•
LED working lights, attachments	•	•	•
LED working lights on cab, front and rear	•	•	•
LED working lights on cab, front, 2 alt. 4 LED lamps	•	•	•
LED working lights on cab, rear, 2 alt. 4 LED lamps	•	•	•
LED working lights, rear in grille, 2 LED lamps	•	•	•
LED working lights, front above head lamps, 2 LED lamps	•	•	•
LED work lights, side on cab, 4 LED lamps	•	•	•
LED light packages	•	•	•
Working lights halogen, attachments	•	•	•
Working lights on cab halogen, front and rear	•	•	•
Working lights on cab halogen, rear	•	•	•
Can Bus Interface	•	•	•
Protective Equipment			
Anti-theft device	•	•	•
Bellyguard front	•	•	•
Bellyguard rear	•	•	•
Boom cylinder hose and tube guards	•	•	•
Cab roof, heavy duty	•	•	•
Center hinge and rear frame guard	•	•	•
Corrosion protection, painting of machine	•	•	•
Cover plate front frame, heavy-duty	•	•	•
Cover plate, under cab	•	•	•
Cover plates rear frame	•	•	•
Guards for front headlights	•	•	•
Grease nipple guards	•	•	•
Guards for radiator grill	•	•	•
Guards for tail lights, heavy-duty	•	•	•
Wheel/axle seal guards	•	•	•
Window guards, side and rear	•	•	•
Windshield guard	•	•	•
Other Equipment			
CareTrack, GSM/Satellite	•	•	•
CE-marking	•	•	•
Comfort Drive Control (CDC)	•	•	•
Comfort Drive Control (CDC) Electro-servo	•	•	•
Secondary steering	•	•	•
Counterweight, logging	•	•	•
Counterweight, signal painted, chevrons	•	•	•
Noise reduction kit, EU excluding decal	•	•	•
Sign, 50 km/h	•	•	•
Sign, slow moving vehicle	•	•	•

OPTIONAL EQUIPMENT

	L60H	L70H	L90H
External equipment			
Deleted front mudguards	•	•	•
Bracket for fire extinguisher	•	•	•
Fire suppression system	•	•	•
Mudguards, full cover, rear for 80-series tires	•	•	•
Mudflap kit for mudguards, full cover for 80-series tires	•	•	•
Mudguards, full cover, rear and front/rear for 65-series tires	•	•	•
Mudflap kit for mudguards, full cover for 65-series tires	•	•	•
Footsteps front frame	•	•	•
Footsteps, right-hand side	•	•	•
Flexible rear step	•	•	•
Cab ladder, rubber suspended	•	•	•
Tires and Rims			
20.5R25	•	•	•
600/65R25	•	•	•
650/65R25	—	—	•
620/75R26 Agriculture application only	•	•	•
750/65R26 Agriculture application only	•	•	•

OPTIONAL EQUIPMENT

	L60H	L70H	L90H
Attachments			
Buckets:			
Straight	•	•	•
Spade nose	•	•	•
High tipping	•	•	•
Light material	•	•	•
Grading	•	•	•
Wear parts:			
Bolt-on edge	•	•	•
Bolt-on or weld-on bucket teeth	•	•	•
Segments	•	•	•
Log grapples	•	•	•
Fork equipment	•	•	•
Material handling arm	•	•	•
Snow blade	•	•	•
Broom	•	•	•
Sand spreading bucket	•	•	•
Bale clamp	•	•	•
Drum rotator	•	•	•

SELECTION OF VOLVO OPTIONAL EQUIPMENT

External axle cooling (L70H, L90H)



Reversing camera with radar detect CoPilot



Premium seat



Comfort Drive Control



Light packages



Lock-up converter (L70H, L90H)



Not all products are available in all markets. Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.



Volvo Construction Equipment
volvoce.com



Volvo Construction Equipment North America
Warranty - Disclaimers - Limitations
Limited Warranty for Governmental / Municipalities

Volvo Construction Equipment North America ("Volvo CE") hereby extends to its authorized dealers ("Dealer") and the Dealer's Governmental / Municipalities customers ("Customer", and both Dealer and Customer are referred to herein as a "Buyer"), who purchase a new Volvo construction equipment machine ("Machine") or new Volvo part ("Part", both of which are referred to herein as a "Product") from Volvo, the following limited warranty:

Subject to the exceptions and limitations set forth below, Volvo CE or Dealer will repair or replace any part of a new Machine or new Part which proves to be defective in material or workmanship during the following periods (the "Warranty Period"):

- Volvo wheel loaders: 12 months/2500 hours, whichever first occurs
- Volvo articulated haulers: 12 months/2500 hours, whichever first occurs
- Volvo hydraulic excavators: 12 months/2500 hours, whichever first occurs
- Volvo motor graders: 12 months/2500 hours, whichever first occurs
- Volvo compactors: 12 months/1500 hours, whichever first occurs
 - 24 months unlimited hours on DD90 and larger compactors
- Volvo pavers: 12 months/1500 hours, whichever first occurs
 - 24 months unlimited hours on 6000 / 7000 series pavers
- Volvo milling: 12 months/1500 hours, whichever first occurs
- Volvo compact wheel loaders (up to 100 net hp.): 12 months/unlimited hours
- Volvo skid steer loaders: 12 months/unlimited hours; Lifetime arm for one-sided
- Volvo compact hydraulic excavators (less than 11 metric tons): 12 months/unlimited hours
- Volvo backhoe loaders: 12 months/unlimited hours
- Volvo engines: 12 months/2500 hours, whichever first occurs
- Volvo parts: 6 months/1500 hours, whichever first occurs
- Volvo remanufactured components: 12 months/2500 hours, whichever first occurs
- Volvo Attachments: 12 months

The Warranty Period commences immediately following the delivery of said Product to the Buyer who first puts said Product into use. The foregoing limited warranty shall include the labor cost to accomplish the repair or replacement of the defective part provided that the repair or replacement was performed by a Dealer.

The foregoing warranty does not cover: (i) any Product found to have been damaged by abuse, accident, other casualty or a failure to maintain or use the warranted Product in accordance with the applicable manuals or instructions (Buyer is required to use only original equipment manufacturer filters during the Warranty Period); (ii) the labor costs to repair or replace defective Parts after the expiration of the Warranty Period of the Machine in which such Part is located; (iii) overtime labor premiums; (iv) costs and expenses associated with the transportation of Dealer's service personnel to and from the location of the warranted Product; (v) any parts, components, attachments or accessories for which Buyer receives a separate warranty by the manufacturer or producer thereof (in specified cases said warranty may be administered by Volvo CE); (vi) maintenance items or ground engaging parts that have achieved their normal service life.

DISCLAIMER OF IMPLIED WARRANTIES AND LIMITATION OF REMEDIES

THE FOREGOING WARRANTY TO BUYER IS EXCLUSIVE AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, AND THERE IS NO IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

REMEDIES AVAILABLE TO BUYER ARE LIMITED TO MAKING A CLAIM UNDER THE FOREGOING WARRANTY AND ARE EXCLUSIVE AND EXPRESSLY LIMITED TO OBTAINING THE PARTS AND LABOR IN ACCORDANCE WITH THE TERMS OF SAID WARRANTY.

Warranty – Disclaimers – Limitations

LIMITATIONS OF LIABILITY AND DAMAGES

Regardless of whether a claim against Volvo CE or Dealer is based on the foregoing warranty or is an action in contract, tort (negligence or strict liability) or otherwise, their respective liability for losses, damages or expenses of any kind arising from the design, manufacture, repair or sale of the Products is limited, unless otherwise prohibited by law, to an amount not exceeding the cost performing the obligations contained in the foregoing warranty, and in no event shall their respective or joint liability exceed the value of the Product or part thereof giving rise to such liability.

CONSEQUENTIAL AND SIMILAR DAMAGES NOT RECOVERABLE

Except for performing the obligations of the foregoing warranty in accordance with its terms, Volvo CE and Dealer shall have no liability for loss, damage, or expense, directly or indirectly, attributable to a loss of use of a Product, loss or damage to property other than the Product, loss or damage to the Product or any part thereof or any other economic or commercial loss, including, without limitation, lost profits or special or consequential damages (except liability for any type of consequential damages which by law may not be disclaimed). The parties intend that this prohibition against consequential and similar damages will survive and be effective even if the limitation of remedies in the foregoing sections is found to fail of its essential purpose under section 2-719 of the Uniform Commercial Code.

ALLOCATION OF RISK

The foregoing warranty disclaimers, limitations of liability and limitation of remedies are bargained allocations of risks among (i) the Customer who purchased the Product; (ii) the Dealer who sold the Product, and (iii) Volvo CE, which is a third party beneficiary of the contract of sale between the Customer and the Dealer. The Buyer of the Product accepts the foregoing warranty and the other bargained for allocations of risk as part of the agreed price for the purchase of the Product to which the foregoing warranty applies. Volvo CE is prepared to offer different warranties and other allocations of risk for other prices. However, any such change in the warranty or the allocation of risks must be confirmed in writing by Volvo CE.

STATUTE OF LIMITATIONS

Any action by a Buyer of a Product for breach of contract, for breach of warranty arising under, or for a cause of action arising out of the sale of a Product, whether based on contract, tort (negligence or strict liability) or otherwise, shall be commenced within one (1) year after the cause of action has accrued. Any such cause of action shall be deemed to have accrued at the earlier of (i) the discovery of the defect or breach, or (ii) the expiration of the applicable Warranty Period.

Company ID Number: 475502

**E-VERIFY
CORPORATE COMPANY**

**If you have any questions, contact E-Verify at
888-464-4218.**

**INFORMATION REQUIRED
FOR E-VERIFY**

Information relating to your Company:

Company Name: Cowin Equipment Company Inc

Company Facility Address: 2238 Pinson Valley Parkway
Birmingham, AL 35217

County or Parish: JEFFERSON

Information relating to the Corporate Administrator(s) for your Company on policy questions or operational problems:

Name:	George Tickle	Fax Number:	(205) 841 - 2639
Telephone Number:	(205) 488 - 3950		
E-mail Address:	gtickle@cowin.com		
Name:	Tracy Womack	Fax Number:	(205) 488 - 3164
Telephone Number:	(205) 488 - 3959		
E-mail Address:	twomack@cowin.com		



Company ID Number: 505216

**THE E-VERIFY PROGRAM FOR EMPLOYMENT VERIFICATION
MEMORANDUM OF UNDERSTANDING**

ARTICLE I

PURPOSE AND AUTHORITY

This Memorandum of Understanding (MOU) sets forth the points of agreement between the Department of Homeland Security (DHS) and Cowin Equipment Co Inc (Employer) regarding the Employer's participation in the Employment Eligibility Verification Program (E-Verify). This MOU explains certain features of the E-Verify program and enumerates specific responsibilities of DHS, the Social Security Administration (SSA), and the Employer. E-Verify is a program that electronically confirms an employee's eligibility to work in the United States after completion of the Employment Eligibility Verification Form (Form I-9). For covered government contractors, E-Verify is used to verify the employment eligibility of all newly hired employees and all existing employees assigned to Federal contracts or to verify the entire workforce if the contractor so chooses.

Authority for the E-Verify program is found in Title IV, Subtitle A, of the Illegal Immigration Reform and Immigrant Responsibility Act of 1996 (IIRIRA), Pub. L. 104-208, 110 Stat. 3009, as amended (8 U.S.C. § 1324a note). Authority for use of the E-Verify program by Federal contractors and subcontractors covered by the terms of Subpart 22.18, "Employment Eligibility Verification", of the Federal Acquisition Regulation (FAR) (hereinafter referred to in this MOU as a "Federal contractor with the FAR E-Verify clause") to verify the employment eligibility of certain employees working on Federal contracts is also found in Subpart 22.18 and in Executive Order 12989, as amended.

ARTICLE II

FUNCTIONS TO BE PERFORMED

A. RESPONSIBILITIES OF SSA

1. SSA agrees to provide the Employer with available information that allows the Employer to confirm the accuracy of Social Security Numbers provided by all employees verified under this MOU and the employment authorization of U.S. citizens.
2. SSA agrees to provide to the Employer appropriate assistance with operational problems that may arise during the Employer's participation in the E-Verify program. SSA agrees to provide the Employer with names, titles, addresses, and telephone numbers of SSA representatives to be contacted during the E-Verify process.
3. SSA agrees to safeguard the information provided by the Employer through the E-Verify program procedures, and to limit access to such information, as is appropriate by law, to individuals responsible for the verification of Social Security Numbers and for evaluation of the E-Verify program or such other persons or entities who may be authorized by SSA as governed



Company ID Number: 505216

To be accepted as a participant in E-Verify, you should only sign the Employer's Section of the signature page. If you have any questions, contact E-Verify at 888-464-4218.

Employer Cowin Equipment Co Inc	
Tracy Womack Name (Please Type or Print)	Title
Electronically Signed Signature	02/15/2012 Date

Department of Homeland Security – Verification Division

USCIS Verification Division

Name (Please Type or Print)	Title
Electronically Signed Signature	02/15/2012 Date

Information Required for the E-Verify Program

Information relating to your Company:

Company Name:	Cowin Equipment Co Inc
Company Facility Address:	2238 Pinson Valley Parkway
	Birmingham, AL 35217
Company Alternate Address:	PO Box 10624
	Birmingham, AL 35202
County or Parish:	JEFFERSON
Employer Identification Number:	630141942