

BID SUBMITTAL FORM
Alabama County Joint Bid Program
Heavy Equipment – Bid Item: Track Mount Excavator - Option A-2

Company Name: Cowin Equipment Company Inc.

Address: 4325 Northern Blvd
Montgomery AL 36110

Bid Submitted by: John Edwards
(Name of company representative)

Title: Governmental Sales Manager E-mail address: jedwards@cowin.com

Phone: 850-685-7055 Fax: 334-834-2272

By submitting this bid, we agree:

Initials

The equipment model number identified below meets the bid specs for this bid item

JE

That the bid price will be honored for all counties for the period from Jan. 1, 2022 to Dec. 31, 2022.

JE

The equipment will be delivered at the bid price to all counties participating in the joint bid program.

JE

The company acknowledges the freight preparation and delivery price is to be included in the total bid price for the standard machine.

JE

The company representative listed above will be the contact person for purchasing this bid item under the joint bid program.

JE

The bid is accompanied by a current catalog or model specification document for the model number identified below.

JE

The bid is accompanied by a copy of the manufacturer's standard warranty as required in the bid specifications.

JE

The bid includes the e-verify documentation required by Alabama law.

JE

If awarded the bid, a performance bond will be provided upon request.

JE

The bid documents include the **Manufacturer's Suggested Retail Price Sheet (MSRP) for the Standard Machine.**

JE

Total Bid Price for Standard Machine: \$ 230,125.⁰⁰
(Total Bid Price for Standard Machine Includes Freight Preparation, Delivery and Standard Warranty Costs) *

Freight Preparation and Delivery: \$ 2,000.⁰⁰
(Included in Standard Machine Bid Price)

Manufacturer's Suggested Retail Price for Standard Machine: \$ 270,484.⁰⁰

Equipment Model #: Volvo EC300E

Description: Track mount Excavator

Signature of company representative submitting bid: John Edwards

Title: Governmental Sales Manager

* **NOTE:** Award will be made based on the total cost of the **Standard Machine**. The total cost of the standard machine is to include the freight preparation, delivery and standard warranty cost. Freight preparation, delivery will be excluded from the total bid price of the standard machine in determining the percentage discount for any available options.

BID SUBMITTAL FORM: OPTION COST SHEET

By submitting this bid, we agree:

To offer any available options at the percent difference between the Manufacturer's Suggested Retail Price Sheet and the actual bid price on the Standard Machine*

JE

The bid documents include the **Manufacturer's Suggested Retail Price Sheet (MSRP)** for the Standard Machine

JE

Equipment Model #: Volvo Ec 300E

Description: Track Mount Excavator

Signature of company representative submitting bid: John Edwards

Title: Governmental Sales Manager

***Note:** The percent difference between the **Manufacturer's Suggested Retail Price Sheet (MSRP)** for the standard machine as specified by these **Bid Specifications** and the actual price bid by the vendor will be calculated to determine the percentage discount to be applied to any available options. The bid price of the freight preparation, delivery cost shall be excluded in determining the percentage discount to be applied to available options. Any individual county may choose to add any available option to the standard machine at the percentage discount at the time of purchase.

BID SPECIFICATIONS FOR TRACK-MOUNTED EXCAVATOR - OPTION A-2

GENERAL

These specifications shall be construed as the minimum acceptable standards for a track mounted hydraulic excavator with long undercarriage. Should the manufacturer's current published data or specifications exceed these standards, the manufacturer's standards shall be considered minimum and shall be furnished. All integral parts not specifically mentioned in the scope of these specifications that are necessary to provide a complete working unit shall be furnished. Additionally, the machine offered for bid shall include all standard manufacturers' equipment. The excavator must be a new current production model and shall meet or exceed all EPA and other applicable standards at the time of manufacture.

Use of specific names and numbers in the specifications is not intended to restrict the bidder or any seller or manufacturer, but is intended solely for the purpose of indicating the type, size and quality of equipment considered best adapted to the uses of the counties participating in this joint bid.

BID SUBMITTAL FORM

Each bidder must submit his or her bid on the bid submittal form included in the invitation to bid package. All written warranties to be submitted shall be attached to the bid submittal form.

BID PRICE

The price bid shall include all destination charges, delivery charges, title fees, rebates, and all other applicable costs and refunds.

MANUALS

Each unit shall be provided with one (1) copy of the operator's manual, one [1] repair manual, and one (1) copy of the current parts manual. Units will not be accepted for delivery until the manuals as outlined above are received by the purchaser.

REPLACEMENT PARTS AVAILABILITY

Parts must be available for 5 years or 7,500 hours of use for the piece of equipment. If any replacement parts are not delivered within three (3) working days of an order being placed, the bidder will deliver an equivalent machine for the county to use at no cost to the county until such time as the parts are delivered to the county so it can affect repairs to its machine.

WARRANTY

Bidders shall submit a copy of the manufacturer's standard warranty. Warranty shall include service response time of maximum of 36 hours within notification by county.

Yes ☒ No ☐
Page#
or
Attachment ☒

WEIGHT

Minimum 68,000 lbs. equipped with minimum 31 inch wide track shoes.

Yes ☒ No ☐
Page # 20

ENGINE

Turbocharged, 6 cylinders with a minimum 400 cubic inch displacement diesel engine capable of a minimum 210 net horsepower.

Yes ☒ No ☐
Page # 16

Engine shall be manufactured by the equipment manufacturer.

Yes ☒ No ☐
Page # 16

UNDERCARRIAGE

Track length shall be minimum 15' 3".

Yes ☒ No ☐
Page # 17

Track shoe width shall be minimum 31" (Triple grouser Shoes)

Yes ☒ No ☐
Page # 16

Minimum eight (8) track rollers per side.

Yes ☒ No ☐
Page # 16

Minimum two (2) carrier rollers per side.

Yes ☒ No ☐
Page # 16

STARTING SYSTEM

24 volt system with a minimum 100 amp alternator.

Yes ☒ No ☐
Page # 16

CAPACITIES

Fuel Tank Capacity – 105 gallon minimum

Yes ☒ No ☐
Page # 16

Hydraulic Tank Capacity – 34 gallon minimum

Yes ☒ No ☐
Page # 16

Engine Coolant – 7 gallon minimum

Yes ☒ No ☐
Page # 16

BOOM AND STICK

One piece boom with minimum 19' length

Yes ☒ No ☐
Page # 17

Stick shall be a minimum 9' long

Yes ☒ No ☐
Page # 17

DIMENSIONS

Reach at ground level – 33' minimum

Yes ☒ No ☐
Page # 19

Bucket breakout force (SAE) – minimum 37,000 lbs.

Yes ☒ No ☐
Page # 19

Stick digging force (SAE) – minimum 28,000 lbs.

Yes ☒ No ☐
Page # 19

Bucket:

Standard with no bucket. Buckets will be considered optional attachment's.

HYDRAULICS

Hydraulic pump output shall be a minimum of 120 GPM

Yes ☒ No ☐
Page # 16

CAB

Enclosed ROPS cab:

Yes ☒ No ☐
Page # 26

Heater

Yes ☒ No ☐
Page # 26

Factory installed air conditioning

Yes ☒ No ☐
Page # 26

AM/FM radio

Yes ☒ No ☐
Page # 26

Suspension seat

Yes ☒ No ☐
Page # 26, 27

Defroster

Yes ☒ No ☐
Page # 26

Shall be equipped with a 12-volt converter capable of powering a two-way radio.

Yes ☒ No ☐
Page # option

INVITATION TO BID

HEAVY EQUIPMENT

NOTICE OF BID OPENING

NOTICE IS HEREBY GIVEN that the Association of County Commissions of Alabama, which administers the Alabama County Joint Bid Program on behalf of Alabama's county governing bodies, shall receive and open bids for the purchase of zero (0) or more items of heavy road equipment at its office located at 2 North Jackson Street, Montgomery, Alabama, at **10:00 a.m. on Friday, October 22, 2021**. Bid specifications are available at <http://www.alabamacounties.org/heavy-equipment/> for each of the following items:

Asphalt Milling Attachments
Light Duty Backhoe
Medium Duty Backhoe
Heavy Duty Backhoe Option A
Heavy Duty Backhoe Option C
85 PTO Tractor Option A
85 PTO Tractor Option B
95 PTO Tractor Option A
95 PTO Tractor Option B
Track Mount Excavator Option A-1
Track Mount Excavator Option A-2
Track Mount Excavator Option A-3
Track Mount Excavator Option B-1
Track Mount Excavator Option B-2
Track Mount Excavator Option B-3
Track Mount Excavator Option C-1
Track Mount Excavator Option C-2
Compact Track Mount Excavator Option D-1
Compact Track Mount Excavator Option D-2
Compact Track Mount Excavator Option D-3
Mini Track Excavator Option E-1
19 Ton Wheeled Excavator
21 Ton Wheeled Excavator
2WD Highway Speed Truck Excavator
4WD Highway Speed Truck Excavator
Light Duty Motor Grader – Option A
Light Duty Motor Grader – Option B
Heavy Duty Motor Grader – Option A
Heavy Duty Motor Grader – Option B
Medium Duty Motor Grader – Option A
Medium Duty Motor Grader – Option B
Medium Duty Motor Grader – AWD
100 HP Heavy Duty Hydrostatic Bulldozer – Option B
100 HP Heavy Duty Hydrostatic Bulldozer – Option C
100 HP Heavy Duty Hydrostatic Bulldozer – Option D

125 HP Heavy Duty Hydrostatic Bulldozer – Option A
125 HP Heavy Duty Hydrostatic Bulldozer – Option B
Mulching Dozer
3 CY Wheel Loader Option A
3 CY Wheel Loader Option B
3 CY Wheel Loader Option C
3.65 CY Wheel Loader Option A
3.65 CY Wheel Loader Option B
Heavy Duty Dump Chassis – Option A
Heavy Duty Dump Chassis – Option C
Heavy Duty Dump Chassis – Option D
Heavy Duty Dump Chassis – Option F
Lowboy Tractor Option – A
Lowboy Tractor Option – B
Lowboy Tractor Option – E
Skid Steer Loader w/no attachments
Skid Steer Attachments
Ride-on Industrial Boom Mower
Asphalt Distributor Truck
Chip Spreader
Rubber Tire Roller
7.5 Ton Single Drum Vibratory Roller
One-man Pothole Patcher Option A
One-man Pothole Patcher Option B
Trailer Mounted Patcher – Diesel
Trailer Mounted Patcher – Air Compressor/Tools
Trailer Mount Mastic Patcher/Crack Sealer
Asphalt Storage Tanks
Half Round End Dump Trailer
Lowboy Trailers – 35 Ton/55 Ton
Tag Trailer – 20 Ton
Road Wideners and Attachments
16' Steel Dump Bodies Options B, D, E, F (Automatic and Manual)

Time is of the essence in submitting bids and only bids received in the Association office by 10:00 a.m. Central Time on Friday, October 22, 2021 will be opened and considered. Bidders and any other interested individuals are invited to attend the bid opening.

THE INVITATION PACKAGE

The invitation package for each item to be bid includes: this invitation to bid, the written bid specifications for the particular item of heavy road equipment, and a Bid Submittal Form to be used in submitting a bid for that particular item. Bidders should verify that they have received all pages of the invitation package. If there are any omissions, the bidder should contact **Kenya Howard** in the Association office by mail, fax, or e-mail (jointbid@alabamacounties.org) to request missing pages. It is the responsibility of the bidder to make this request in sufficient time to prepare and submit the bid in time for the bid opening. Bidders should carefully read and comply with all parts of the invitation package, including all attachments and/or any addendum.

PREPARING AND SUBMITTING BIDS

All bids must be typed or hand written in ink on the attached Bid Submittal Form. **The completed Bid Submittal Form shall be placed in front of and separated from all other documents included in the bid packet, such that it will be the first document viewed upon opening the bid packet.**

Bids submitted in pencil and bids not submitted on the Bid Submittal Form will **not** be considered. All bids shall include a current catalog or model specification document for the equipment model number being offered for consideration. Bids submitted without such documentation will **not** be considered. Only information contained on the attached Bid Submittal Form and in the model specification document will be considered in evaluating bids.

Each separate requirement in the bid specification includes a block for indicating whether or not the item bid meets the specification. The bidder shall indicate compliance with each requirement by checking "Yes" or "No" in the block to the right of each bid specification. In addition, the bidder shall indicate the page number in the supplied manufacturer's equipment literature on which compliance with the specification can be verified. Failure to complete this portion of the bid form may result in the subject bid not being considered.

Each bid for one of the heavy equipment items included in the bid package must be submitted on the Bid Submittal Form for that item and forwarded in a separate envelope with the bid item and item number clearly identified on the outside of the envelope. Envelopes containing a "no bid" shall also include the words "NO BID" on the outside of the envelope. Facsimiles and e-mails will not be accepted. Bids submitted by "Express/Overnight" services must be in a separate inner envelope or package sealed and identified as stated above. All bids must be received in the Association office prior to the bid opening. Bids received after the deadline will be returned unopened.

The County Joint Bid Program reserves the right to require a performance bond from successful bidders as permitted under Alabama law. However, **no bid bond is required for this bid offering.**

All bids should be mailed or hand-delivered to:

Attn: Joint Bid Program
Association of County Commissions of Alabama
2 North Jackson Street Montgomery, Alabama 36104 (Physical Address)
P.O. Box 5040, Montgomery, Alabama 36103 (Mailing Address)

BID SPECIFICATIONS

Please note that each piece of heavy equipment available for bid may include several different sizes and categories of machines. You should read each set of specifications very carefully as the differences vary depending upon the piece and size of equipment.

The award will be based on the total cost of the **Standard Machine** bid by the lowest responsible bidder. Each Bid shall include a **Manufacturer's Suggested Retail Price Sheet (MSRP)** for each machine bid. The percent difference between the Manufacturer's Suggested Retail Price (MSRP) for the standard machine as specified by these bid specifications and the actual price bid by the vendor will be calculated and that percentage discount shall be applied to any options an individual county may choose to add to the machine.

Once the bids have been awarded, any county participant purchasing under this program may, at its discretion, add any of the vendor's available options at the same discount off the Manufacturer's Suggested Retail Price Sheet as was applied to the Standard Machine Price Bid.

Any use of specific names and/or model numbers in the attached specifications is not intended to restrict the bidder or any seller or manufacturer, but is included solely for the purpose of indicating the type, size, and quality of materials, product services, or equipment considered best adapted to the use of the counties participating in the joint bid program.

ACQUISITION AND FINANCING OPTIONS

The awarded Vendor will provide the equipment, including any options required by the purchaser, at the awarded price as contracted through the Joint Bid Program. The purchaser may secure its own financing to acquire the equipment or execute any financial options available under Alabama law with the awarded Vendor in order to acquire the equipment.

BIDDER QUALIFICATIONS

All bidders and all program participants must be in compliance with any applicable federal, state, county and municipal laws, regulations, resolutions and ordinances, including but not limited to, licensing, permitting, and taxation requirements. All bidders should be prepared to submit evidence or documentation as proof that they are properly licensed and permitted under any applicable laws upon request. Such evidence or documentation may be submitted with the bid. Additionally, all bidders shall provide proof that they are in compliance with the e-verify requirements of Alabama's Immigration Law (Ala. Code § 31-13-1 et seq., as amended by Act No. 2012-491).

BID AWARD

The Houston County Commission will serve as the awarding authority for all bids and will award all contracts at a regular meeting of the Houston County Commission. Any and all bids submitted in compliance with this invitation to bid shall be considered, and award will be made to the lowest responsible bidder meeting bid specifications as determined by the awarding authority in compliance with Alabama law. All bids will be reviewed and evaluated by a committee created for that purpose, which committee will make comments and recommendations to the awarding authority regarding the award. All factors contained in each invitation package will be evaluated in determining the successful bidder, and any omissions of the stated requirements may be cause for rejection of the bid submitted. The awarding authority reserves the

right to reject any and all bids, to waive any informality in bids, and to accept in whole or in part such bid or bids solely at its discretion.

The contract period will be one year with an option to renew for a second and third year under identical price, terms, and conditions upon the mutual consent of the vendor and the awarding authority. Any renewal contract shall be approved in writing by the vendor and the awarding authority no later than 90 days prior to the expiration of the existing contract.

CONTACT REGARDING BIDS AND INVITATION

Contact initiated by a potential bidder with any county official, county employee, or member of the Association staff shall only be as specifically set out in this Invitation to Bid. Any questions related to the bid or the County Joint Bid Program shall be directed to Association staff in writing under the procedures set out in this Invitation to Bid. Additionally, a bidder may contact the Association in writing to request an appointment to review bid specifications following the bid opening. **However, there shall be no communication with any county official or county employee regarding this bid between the date of this invitation and the date of bid award.** Any contact other than as set out here shall be deemed as an attempt to unduly influence the bid award, and shall be grounds for rejection of the bid submitted by the bidder initiating such other contact.

Any questions or problems related to downloading or obtaining copies of this Invitation to Bid should be directed to **Kenya Howard** at jointbid@alabamacounties.org or **334-263-7594**.

Any other questions or requests for additional information regarding this invitation or the bid specifications shall be submitted **in writing** no later than five (5) days prior to bid opening to:

ATTN: Patrick McDougald
Association of County Commissions of Alabama
P.O. Box 5040
Montgomery, Alabama 36103

E-mail: barbeng@bellsouth.net

VOLVO

Construction Equipment

Pricing Valid From: 01/01/2022

Model: Volvo EC300EL Crawler Excavator Build Sheet

Description	Article	MSRP
Volvo EC300EL Crawler Excavator	EC300EL	\$215,964.60
Boom, 20' 4" (6.2m), GP	XC10107	\$16,378.48
Arm, 10' 0" (3.05m), HD	XC10213	\$9,009.32
Linkage with lifting eye, GP	XC10403	\$466.48
Decal Kit NA	XC10503	\$0.00
Track Pads, 32" Triple Grouser	XC20106	\$12,102.64
Roller guard STD	XC20201	\$402.56
Lower frame - foldable steps	XC20302	\$0.00
Belly Cover HD, 10mm	XC20402	\$280.84
Engine NA MDE8	XC30112	\$0.00
Reversible Fan	XC30802	\$2,231.08
Air precleaner, Cyclone	XC30401	\$100.64
Delayed engine Shutdown	XC30902	\$136.68
Anti-vandal mounting brackets on cab	XC40112	\$0.00
CareCab w/ Opening Hatch	XC40103	\$406.64
Seat, Air suspension w/Heater & X-Isolator	XC40203	\$1,079.84
Seat Belt, 3 inch Retractable	XC41204	\$0.00
Volvo Active Control	XC40301	\$0.00
Air conditioning, ACC (automatic climate control)	XC40502	\$2,271.88
Universal key	XC40602	\$0.00
Radio with MP3, USB port & Bluetooth	XC40708	\$0.00
Guardrail	XC50801	\$0.00
Handrail, Foldable	XC50803	\$0.00
Work lights on deck & boom, Halogen	XC50000	\$0.00
Extra work lights on cab front/rear, CWT, boom & RH side, Halogens	XC50101	\$308.04
Travel alarm	XC50102	\$0.00
Battery switch protector	XC50132	\$0.00
Volvo Smart View on Instrument Cluster only	XC50144	\$0.00
Dig Assist Start	XC50155	\$0.00
CareTrack, GSM/Satellite	XC50402	\$0.00
CareTrack Connectivity 4 yr Subscription	XC50404	\$0.00
De-activate SAT	XC50406	\$0.00
Hydraulic oil ISO VG46	XC60102	\$538.56

Pre-setting for hyd. pressure (piping not installed for long reach boom and arm)	XC61301	\$163.20
Manual, English	XC70302	\$0.00
CWT 6200kg, Fabrication	XC80191	\$8,219.84
Under cover HD, 4.5mm superstructure	XC80202	\$0.00
Frame lifetime guarantee	XC70501	\$422.28
Less Bucket With Pins	XC8283909	\$0.00
TOTAL MSRP as per SPECIFICATIONS		\$270,483.60

Forestry Options

Forestry Modification (Must be combined with option XC10857)	XC10705	\$839.12
Reinforced and Wider Lower Frame with High Walker Undercarriage	XC10716	\$40,706.84
Less cab structure only (Must be combined w/options XC10705 & XC10857 and either Heavy Duty Track Guard (Must be combined with XC10716)	XC10722	\$0.00
20mm Lower Frame Belly Cover (Must be combined with XC10716)	XC20207	\$3,021.24
X1 and Basic Piping, Harvester (Must be combined w/options XC10705, XC10857 & SAS_F Modification Package	XC20403	\$293.76
	XC60206	\$4,280.60
		\$0.00
(SAS) Body Protection Forestry (Must be combined with XC10705)	XC10857	\$49,241.52
(SAS) Forestry Cab w/7.9" (200mm) cab riser (Must be combined w/options XC10722, XC10705	XC10858	\$33,743.64
(SAS) Forestry Cab w/13.8" (325mm) cab riser (Must be combined w/options XC10722, XC10705	XC10859	\$34,643.96
(SAS) Cwt w/ 650L Fuel Tank (Must be combined w/options XC10705 & XC10857, no	XC10860	\$37,207.56
(SAS) Boom riser (Cannot be combined with options XC10864 or XC10865)	XC10861	\$6,619.12
(SAS) Arm cylidr guarding & 4 LED lgts w/guarding on Boom (Must be combined w/options	XC10862	\$3,943.32
(SAS) Harvester Arm (Must be combined w/options XC10705, XC10857 and XC60206, No	XC10863	\$10,600.52
(SAS) Logloader boom & arm w/o live heel (Must be combined w/options XC10705, Not	XC10864	\$54,627.12
(SAS) Logloader boom & arm w/live heel (Must be combined w/options XC10705, Not allowed	XC10865	\$61,911.28
[SAS] HYD. ELEVATING CAB_2.3M	XC10867	\$31,507.12
[SAS] Aux oil cooler	XC10875	\$6,919.68
[SAS] Rear entry cab	XC10877	\$52,389.24
[SAS] Log bm set w/heel_top	XC10878	\$61,911.28

OPTIONS

Basic

BOOM		
Boom, 20' 4" (6.2m), HD	XC10108	\$17,992.80
Boom 6.2m, Adjustable 2-piece	XC10109	\$19,018.92
Boom, 20' 4" (6.2m), XHD	XC10110	\$18,586.44
Arm		
Arm, 10' 0" (3.05m), GP	XC10212	\$8,582.96
Arm, 9' 10" (3.0m), XHD	XC10215	\$9,509.12
Arm, 8' 4" (2.55m), HD	XC10235	\$6,205.68
Arm, 12' 2" (3.7m), GP	XC10236	\$10,729.04

Arm 2.75m XD	XC10245	\$6,915.60
--------------	---------	------------

Arm with Strip

Wear strip for arm	XC10801	\$269.96
--------------------	---------	----------

Linkage

Linkage w/o lifting eye	XC10401	\$0.00
-------------------------	---------	--------

Decal kit

Decal Quebec	XC10510	\$0.00
--------------	---------	--------

HERC decals

HERC Decals	XCH9999	\$0.00
-------------	---------	--------

Demolition Package

Demolition Package, Heavy Duty	XC10601	\$9,124.24
--------------------------------	-------------------------	------------

Demolition Package, Light Duty	XC10602	\$6,496.72
--------------------------------	-------------------------	------------

Protection Demolition

Side protection, bolt-on steel	XC10703	\$3,288.48
--------------------------------	---------	------------

Boom cylinder protection	XC10704	\$1,360.68
--------------------------	---------	------------

HD side doors, w/ screening, demolition	XC10748	\$3,349.68
---	---------	------------

Swing bearing cover, demolition	XC10749	\$1,005.72
---------------------------------	---------	------------

Bucket cyl. protection, demolition	XC10750	\$1,731.28
------------------------------------	---------	------------

Option Parts WH

Emergency stop switch for WH	XC10752	\$998.92
------------------------------	---------	----------

Manual, English for WH	XC10758	\$56.44
------------------------	---------	---------

Decals with spanish for WH	XC10508	\$0.00
----------------------------	---------	--------

24-12Volt converter for WH, 20A	XC10751	\$486.88
---------------------------------	---------	----------

Aircleaner for WH cab	XC10754	\$4,743.68
-----------------------	---------	------------

Oil sampling ports for WH	XC10756	\$325.04
---------------------------	---------	----------

Strobe light, LED for WH	XC10757	\$478.72
--------------------------	---------	----------

HD side doors w/ screening for WH	XC10769	\$3,349.68
-----------------------------------	---------	------------

Swing bearing cover for WH	XC10787	\$986.00
----------------------------	---------	----------

Auto fire suppression for WH	XC10795	\$7,533.72
------------------------------	---------	------------

Strobe light, LED without switch for WH	XC10796	\$478.72
---	---------	----------

UC**Track chain**

Track Pads, 24" Triple Grouser	XC20102	\$10,858.24
--------------------------------	---------	-------------

Track Pads, 24" HD Triple Grouser	XC20103	\$11,238.36
-----------------------------------	---------	-------------

Track Pads, 28" Triple Grouser	XC20104	\$11,499.48
--------------------------------	---------	-------------

Track Pads, 36" Triple Grouser	XC20107	\$13,399.40
--------------------------------	---------	-------------

Track Pads, 28" Double Grouser	XC20110	\$10,281.60
--------------------------------	---------	-------------

Track Pads, 28" Single Grouser	XC20220	\$14,050.16
--------------------------------	---------	-------------

Roller guard

HD Full Track guard	XC20202	\$1,708.84
---------------------	---------	------------

Undercover Lower frame

Belly Cover STD, 4.5mm	XC20401	\$78.88
------------------------	---------	---------

Less Lower Structure

Less lower structure	XC20100	\$0.00
----------------------	---------	--------

Engine

Cooling fan system

Reversible fan drive	XC30802	\$2,231.08
----------------------	---------	------------

Fuel filler pump

Fuel filler pump, 13 gpm, auto stop	XC30302	\$958.80
-------------------------------------	---------	----------

Fuel tank_Fast Fuel Fill prep

Preparation to install fast fuel system on fuel tank	XC30350	\$47.60
--	---------	---------

Air cleaner

Precleaner, Oil bath	XC30402	\$1,251.88
----------------------	---------	------------

Auxiliary Heater

Engine Block heater, 120V	XC30501	\$283.56
---------------------------	---------	----------

Coolant heater by diesel, 10KW	XC30503	\$1,791.12
--------------------------------	---------	------------

Water separator heater

Water separator with heater	XC30601	\$301.24
-----------------------------	---------	----------

Automatic engine shutdown

Automatic engine shutdown	XC30901	\$469.88
---------------------------	---------	----------

Regeneration

Arctic regeneration	XC31101	\$83.64
---------------------	---------	---------

Cab

Cabin type

CareCab w/ Fixed Hatch	XC40104	\$0.00
------------------------	---------	--------

CareCab for WH	XC40109	\$405.96
----------------	---------	----------

CareCab High visibility	XC40127	\$2,613.92
-------------------------	---------	------------

Carecab-1w/s Fix hatch,ROPS	XC40131	\$0.00
-----------------------------	---------	--------

Operator Seat

Seat, Mechanical suspension w/o Heater	XC40201	\$990.08
--	---------	----------

Seat, Mechanical suspension w/ Heater	XC40202	\$990.08
---------------------------------------	---------	----------

Deluxe seat	XC40210	\$1,835.32
-------------	---------	------------

Seat-Fabric,Heat,Air,3P belt	XC40212	\$1,241.68
------------------------------	---------	------------

Control Joystick

Joystick, Semi-long, 1 Switch	XC40401	\$1,036.32
-------------------------------	---------	------------

Joystick, 3 Switches & 1 Proportional	XC40404	\$2,074.68
---------------------------------------	---------	------------

Joystick, 4 Switches	XC40405	\$995.52
----------------------	---------	----------

Tiltrotator Control System

Tiltrotator ControlSys.3rd gen	XC80503	\$5,576.68
--------------------------------	---------	------------

Climate Control System

Air conditioning, automatic climate control with HEPA filter	XC40505	\$2,741.08
--	---------	------------

Cab Interior

Front rain shield, can not have Opening hatch	XC40801	\$267.24
---	---------	----------

Lower wiper	XC40803	\$269.96
-------------	---------	----------

Sun shield, metal, can not have Opening hatch	XC40804	\$120.36
---	---------	----------

Ashtray and Lighter	XC40805	\$0.00
---------------------	---------	--------

Delta gateway ==> Smart connect for Tiltrotator XC40807 \$4,042.60

Fog

FOG, frame mounted	XC41001	\$7,675.16
FOG cabin mounted	XC41002	\$2,435.76
FOG, frame mounted, Hinge type for easy cleaning	XC41004	\$8,115.80
FOG,cabin mounted,Hinge type	XC41005	\$2,809.76

Protection

FOPS, cabin mounted	XC41101	\$1,041.76
Anti-vandal kit	XC41102	\$903.72
Safety net, front window	XC41103	\$869.72
FOPS, cabin mounted for WH	XC41104	\$1,041.76

Electrics

Work light

Work lights on deck & boom, LED	XC50001	\$605.20
---------------------------------	---------	----------

Electrics

Antitheft , code-lock	XC50106	\$0.00
Extra work lights on cab front & boom, Halogens	XC50107	\$174.76
Rear view camera	XC50108	\$0.00
Side view camera	XC50119	\$0.00
Green light beacon	XC50127	\$206.72
Air pressure supply in cabin	XC50128	\$1,938.00
Flashing beacon_LED	XC50130	\$164.56
Dig Assist 2D. Not available separate. Automatically selected with IFD XC50141 or 3D XC50156/XC50157	XC50140	\$0.00
Dig Assist In-Field Design	XC50141	\$10,427.12
Dig Assist, Tilt bucket prep.	XC50143	\$888.08
Volvo Smart View on Instrument Cluster and Co-Pilot	XC50145	\$1,221.96
Extra work lights cab front/rear, CWT, boom & RH side, LED	XC50150	\$374.68
Extra work light on cab front & boom, LED	XC50151	\$187.68
Dig Assist, Smart connect	XC50152	\$1,433.44
Dig Assist Topcon 3D-MC (Automatically selects XC50140)	XC50156	\$18,185.24
Dig Assist Trimble Earthworks (Automatically selects XC50140)	XC50157	\$18,185.24
On-Board Weighing Software	XC50158	\$3,714.84

Hydraulics

Hybrid

Hybrid	XC60010	\$11,969.36
--------	---------	-------------

Hydraulic Oil

Hydraulic oil ISO VG32	XC60101	\$538.56
Hydraulic oil ISO VG68	XC60103	\$538.56
Hydraulic oil Bio ISO VG46	XC60105	\$3,019.20
Hydraulic long life oil ISO VG32	XC60106	\$1,233.52

Hydraulic long life oil ISO VG46	XC60107	\$1,233.52
Hammer & Shear piping(X1)		
X1 2 pump double acting piping (piping not installed for long reach boom and arm)	XC60203	\$3,380.96
X1 additional return filter (piping not installed for long reach boom and arm)	XC60301	\$335.92
X1 Roll switch control, proportional, double acting (piping not installed for long reach boom and ar	XC60602	\$269.96
X1 Pedal control, Proportional (piping not installed for long reach boom and arm)	XC60605	\$133.28
Quick fit piping, UQF (piping not installed for long reach boom and arm)	XC60805	\$1,827.16
Straight travel pedal	XC60904	\$1,149.88
Boom float function, w/o hose rupture valve	XC60907	\$743.24
Pattern change	XC60914	\$1,275.68
X1 1 pump double acting piping (piping not installed for long reach boom and arm)	XC60201	\$3,096.04
X1 1 pump single acting piping (piping not installed for long reach boom and arm)	XC60202	\$2,526.88
Extra piping(X1)		
X1 extra pipe for slope and rotator	XC60401	\$92.48
Switch control(X1)		
1 Switch(ON/OFF,1 Way) (piping not installed for long reach boom and arm)	XC60501	\$238.00
X1 2-switch control, On/Off, double acting (piping not installed for long reach boom and arm)	XC60502	\$269.96
Oil Drain Line		
Oil drain line on base machine (piping not installed for long reach boom and arm)	XC60701	\$89.76
Oil drain line on boom	XC60702	\$80.24
Att.hydraulic hoses		
Hyd main hoses on BmArm_Arctic	XC60830	\$671.84
Attachment Circuits		
Quick fit piping-SQF-Digging boom (piping not installed for long reach boom and arm)	XC60801	\$1,827.16
X3 slope bucket/rotator piping (piping not installed for long reach boom and arm)	XC60803	\$2,936.24
Auxiliary Machine Control		
Boom float, must have hose rupture valve	XC60902	\$875.16
Boom float function,Hybrid	XC60910	\$0.00
Comfort driving control	XC60915	\$2,184.84
Hose Rupture Valve Boom		
Hose rupture valves, boom cylinder	XC61001	\$1,491.92
Hose Rupture Valve Arm		
Hose rupture valves, arm cylinder	XC61101	\$965.60
Hose rupture valves, arm cylinder for ME/2pcs boom	XC61102	\$1,729.24
Service		
Service Maintenance		

Tool Kit, full scale	XC70201	\$344.76
Tool Kit, daily maintenance	XC70202	\$145.52
Manual Catalog		
Manual, French	XC70304	\$0.00
Manual, Spanish	XC70305	\$0.00
Other		
Counterweight		
CWT 5500kg, Fabrication	XC80187	\$6,907.44
Undercover superstructure		
Under cover STD 2.3mm	XC80201	\$0.00
Under cover XD	XC80208	\$1,527.28
Attachment		
Quick coupler		
SQF S2 hydraulic coupler w/safety hook	XC8281027	\$4,409.80
SQF S2 hydraulic coupler w/o safety hook	XC8283487	\$4,279.24
VQC U35 hydraulic pin-grabber coupler	XC8301745	\$11,787.12
Quick coupler pin		
Q/fit pin only	XC8284838	\$0.00
Direct fit bucket		
24" Pin-on GP (V4) bucket, 0.72 yd, 3 40GPE teeth, weld-on side cutters	XC8293863	\$4,964.68
24" Pin-on GP (V4) bucket, 0.72 yd, 3 40GPE teeth, bolt-on side cutters, safety hook	XC8293864	\$5,308.76
30" Pin-on GP (V4) bucket, 0.86 yd, 3 40GPE teeth, weld-on side cutters	XC8293867	\$5,157.80
30" Pin-on GP (V4) bucket, 0.86 yd, 3 40GPE teeth, bolt-on side cutters, safety hook	XC8293868	\$5,516.84
35" Pin-on GP (V4) bucket, 1.01 yd, 4 40GPE teeth, bolt-on side cutters, safety hook	XC8293869	\$5,899.00
41" Pin-on GP (V4) bucket, 1.24 yd, 4 40GPE teeth, weld-on side cutters	XC8293870	\$6,042.48
47" Pin-on GP (V4) bucket, 1.49 yd, 5 40GPE teeth, bolt-on side cutters, safety hook	XC8293871	\$7,013.52
53" Pin-on GP (V4) bucket, 1.73 yd, 5 40GPE teeth, weld-on side cutters	XC8293874	\$8,395.96
53" Pin-on GP (V4) bucket, 1.73 yd, 5 40GPE teeth, bolt-on side cutters, safety hook	XC8293875	\$7,471.84
57" Pin-on GP (V4) bucket, 1.9 yd, 5 40GPE teeth, weld-on side cutters	XC8293878	\$8,587.72
59" Pin-on GP (V4) bucket, 1.98 yd, 5 40GPE teeth, weld-on side cutters	XC8293879	\$7,455.52
59" Pin-on GP (V4) bucket, 1.98 yd, 5 40GPE teeth, bolt-on side cutters, safety hook	XC8293880	\$7,810.48
67" Pin-on GP (V4) bucket, 2.3 yd, 6 40GPE teeth, weld-on side cutters	XC8293886	\$7,728.20
77" Pin-on GP (V4) bucket, 2.69 yd, 6 40GPE teeth, weld-on side cutters	XC8293890	\$7,722.08

24" Pin-on HD (V4) bucket, 0.72 yd, 3 40ARXE teeth, bolt-on side shrouds, safety hook	XC8293892	\$6,007.12
--	-----------	------------

24" Pin-on HD (V4) bucket, 0.72 yd, 3 40ARXE teeth, safety hook	XC8293893	\$5,495.08
--	-----------	------------

30" Pin-on HD (V4) bucket, 0.86 yd, 3 40ARXE teeth, bolt-on side shrouds, segment, safety hook	XC8293898	\$6,343.72
--	-----------	------------

30" Pin-on HD (V4) bucket, 0.86 yd, 3 40ARXE teeth, bolt-on side shrouds, safety hook	XC8293899	\$6,202.28
--	-----------	------------

30" Pin-on HD (V4) bucket, 0.86 yd, 3 40ARXE teeth, safety hook	XC8293901	\$5,514.80
--	-----------	------------

47" Pin-on HD (V4) bucket, 1.49 yd, 5 40ARXE teeth, bolt-on side shrouds, segment, safety hook	XC8293908	\$8,211.68
--	-----------	------------

47" Pin-on HD (V4) bucket, 1.49 yd, 5 40ARXE teeth, bolt-on side shrouds, safety hook	XC8293909	\$7,926.76
--	-----------	------------

47" Pin-on HD (V4) bucket, 1.49 yd, 5 40ARXE teeth, safety hook	XC8293911	\$7,433.76
--	-----------	------------

53" Pin-on HD (V4) bucket, 1.73 yd, 5 40ARXE teeth, bolt-on side shrouds, segment, safety hook	XC8293916	\$8,663.20
--	-----------	------------

53" Pin-on HD (V4) bucket, 1.73 yd, 5 40ARXE teeth, bolt-on side shrouds, safety hook	XC8293917	\$8,379.64
--	-----------	------------

53" Pin-on HD (V4) bucket, 1.73 yd, 5 40ARXE teeth, safety hook	XC8293919	\$7,886.64
--	-----------	------------

59" Pin-on HD (V4) bucket, 1.98 yd, 5 40ARXE teeth, bolt-on side shrouds, segment, safety hook	XC8293924	\$9,322.12
--	-----------	------------

59" Pin-on HD (V4) bucket, 1.98 yd, 5 40ARXE teeth, bolt-on side shrouds, safety hook	XC8293925	\$8,632.60
--	-----------	------------

59" Pin-on HD (V4) bucket, 1.98 yd, 5 40ARXE teeth, safety hook	XC8293927	\$8,140.28
--	-----------	------------

59" Pin-on smooth-edge ditching bucket (V4) 1.25 yd	XC8300153	\$4,095.64
--	-----------	------------

63" Pin-on smooth-edge ditching bucket (V4) 1.35 yd	XC8300154	\$4,188.80
--	-----------	------------

Quick fit bucket		\$0.00
-------------------------	--	--------

30" S2 GP (V4) bucket, 0.81 yd, 3 40GPE teeth, weld-on side cutters	XC8293789	\$5,047.64
--	-----------	------------

30" S2 GP (V4) bucket, 0.81 yd, 3 40GPE teeth, bolt-on side cutters	XC8293791	\$5,047.64
--	-----------	------------

35" S2 GP (V4) bucket, 1.01 yard, 4 40GPE teeth, bolt-on side cutters	XC8293792	\$5,240.08
--	-----------	------------

41" S2 GP (V4) bucket, 1.24 yd, 4 40GPE teeth, weld-on side cutters	XC8293793	\$4,607.00
--	-----------	------------

47" S2 GP (V4) bucket, 1.49 yd, 5 40GPE teeth, bolt-on side cutters	XC8293796	\$6,820.40
--	-----------	------------

53" S2 GP (V4) bucket, 1.73 yd, 5 40GPE teeth, weld-on side cutters	XC8293798	\$6,674.88
--	-----------	------------

53" S2 GP (V4) bucket, 1.73 yd, 5 40GPE teeth, bolt-on side cutters	XC8293800	\$6,883.64
--	-----------	------------

57" S2 GP (V4) bucket, 1.9 yd, 5 40GPE teeth, weld-on side cutters	XC8293802	\$7,220.92
---	-----------	------------

59" S2 GP (V4) bucket, 1.98 yd, 5 40GPE teeth, weld-on side cutters	XC8293804	\$7,455.52
--	-----------	------------

59" S2 GP (V4) bucket, 1.98 yd, 5 40GPE teeth, bolt-on side cutters	XC8293806	\$8,440.16
67" S2 GP (V4) bucket, 2.3 yd, 6 40GPE teeth, weld-on side cutters	XC8293811	\$7,709.84
30" S2 HD (V4) bucket, 0.81 yd, 3 40ARXE teeth, bolt-on side shrouds, segments	XC8293815	\$5,159.84
30" S2 HD (V4) bucket, 0.81 yd, 3 40ARXE teeth, bolt-on side shrouds, segments	XC8293816	\$5,159.84
30" S2 HD (V4) bucket, 0.81 yd, 3 40ARXE teeth	XC8293818	\$5,159.84
47" S2 HD (V4) bucket, 1.49 yd, 5 40ARXE teeth, bolt-on side shrouds, segments	XC8293825	\$8,206.92
47" S2 HD (V4) bucket, 1.49 yd, 5 40ARXE teeth, bolt-on side shrouds	XC8293826	\$7,890.72
47" S2 HD (V4) bucket, 1.49 yd, 5 40ARXE teeth	XC8293828	\$7,378.68
53" S2 HD (V4) bucket, 1.73 yd, 5 40ARXE teeth, bolt-on side shrouds, segments	XC8293833	\$8,079.08
53" S2 HD (V4) bucket, 1.73 yd, 5 40ARXE teeth, bolt-on side shrouds	XC8293834	\$7,763.56
53" S2 HD (V4) bucket, 1.73 yd, 5 40ARXE teeth	XC8293836	\$7,251.52
59" S2 HD (V4) bucket, 1.98 yd, 5 40ARXE teeth, bolt-on side shrouds, segments	XC8293841	\$8,780.16
59" S2 HD (V4) bucket, 1.98 yd, 5 40ARXE teeth, bolt-on side shrouds	XC8293842	\$8,310.28
59" S2 HD (V4) bucket, 1.98 yd, 5 40ARXE teeth	XC8293844	\$7,798.92
77" S2 GP (V4) bucket, 2.69 yd, 6 40GPE teeth, weld-on side cutters	XC8293891	\$7,351.48

ACCA

Volvo Construction Equipment
Building Tomorrow



John Edwards
Governmental Sales Manager
850-685-7055
jedwards@cowin.com

EC300E

Volvo Excavators 31.3-36.8 t / 68,950-81,230 lb 253 hp





WELCOME TO OUR WORLD

Welcome to a world of industry leading machinery. A world where imagination, hard work and technological innovation will lead the way towards developing a future which is cleaner, smarter, and more connected. A world supported by the enduring values of the Volvo Group. A world of stability, sustainability and innovation. A world which we put our customers at the heart of.

Welcome to the world of Volvo Construction Equipment – we think you're going to like it here.

Working harder, working smarter

For over 180 years Volvo has been a pioneer in the design and manufacture of machines which set the standard for efficiency, performance and uptime. Across our range of excavators, wheel loaders and haulers, our reputation for engineering excellence is unrivalled, which means whatever your operation or application, we can provide a total fleet solution to help you succeed.

Building on our proud history, the Volvo Concept Lab continues to create cutting-edge ideas and innovative concepts, to ensure we offer customers machines which work harder and smarter long into the future.



Solutions for you

Our industry leading machines are just the start of your relationship with Volvo. As your partner, we have developed an extensive range of additional solutions to help you improve uptime, boost productivity and reduce costs.

Designed for your business

Structured across nine blocks, our portfolio of products and services are designed to complement your machine's performance and boost your profitability. Simply put, we offer some of the best guarantees, warranties and technological solutions in the industry today.

There when you need us

Whether you're buying new or used, our global network of dealers and technicians offer around-the-clock support, including machine monitoring and world-class parts availability. It's the basis of everything offered by Volvo Services, so you can be confident we've got you covered right from the start.


BUILDING TOMORROW

Giving you more

The new and enhanced EC300E is packed with the latest technology to help you move more, for less. Features including the new Volvo engine, improved hydraulics, flow priority functions and optional Dig Assist apps deliver optimum productivity, efficiency and performance for a lower cost per ton.

More productivity

Get more done in the EC300E. An increase in engine power and improved hydraulic performance contributes to faster cycle times, while a 700 kg (1,542 lb) heavier counterweight provides superb stability and a 5% increase in across lifting capacity. Machine productivity is further enhanced by new motion priority functions, boom down speed control and improved jack up speed.

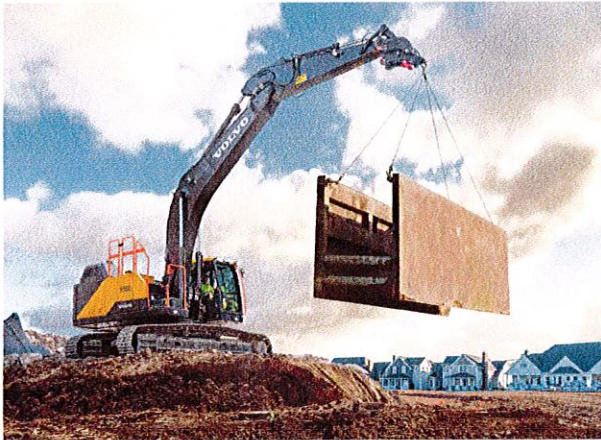

More precision

Unlock the full potential of your machine's productivity with Dig Assist, powered by the 10" Volvo Co-Pilot display. Gain access to a set of smart apps, including Start, In-Field Design, 3D software packages, On-Board Weighing and Volvo Active Control, designed to optimize the digging process.




More control

Double your productivity with Volvo Active Control functions. The working day just got easier with automated boom and bucket movements, making the digging process more accurate and twice as fast. Simply set the grade from the Volvo Co-Pilot display, push the button and get to work – all controlled using a single lever.



More responsiveness

With electric control joystick and full electric travel pedals, operators benefit from an improved response time. Machine controllability is enhanced further by Boom/Swing and Boom/Travel priority functions which enable operators to prioritize one function over another. Operators can also easily adjust the boom down speed, ideal for precision tasks which require optimum control.

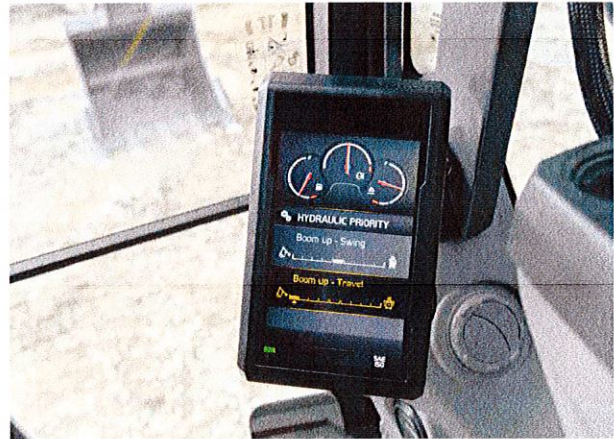



MORE FUEL EFFICIENCY

A range of features combine in the EC300E to deliver up to 10% improvement in fuel efficiency. The new D8M Volvo engine reduces rated rpm from 1800 down to 1600, while also delivering a 5% increase in power, and the intelligent new generation electro-hydraulic system provides on-demand flow and reduces internal losses in the hydraulic circuit. Classic Volvo features such as ECO mode and selectable work modes further contribute to outstanding fuel efficiency.



SAFETY, INSIDE AND OUT


Operators can access the upper structure with safety and confidence thanks to the new 3-point right-hand side access. Industry renowned features such as bolted anti-slip steps, high visibility handrails and spacious, ergonomic and low-noise Volvo Care Cab ensure the highest levels of operator comfort and safety.

For your comfort and safety

With a host of new and proven features including enhanced machine access, superior visibility, bouncing reduction technology and customizable settings, the upgraded EC300E delivers all the safety and comfort you would expect from your Volvo machine.

Know your limits

With Volvo Active Control, operators can easily set swing fence, height limit and depth limit from the Volvo Co-Pilot. This helps to avoid contact with side obstacles, overhead obstacles such as power lines and underground hazards such as pipes and cables.

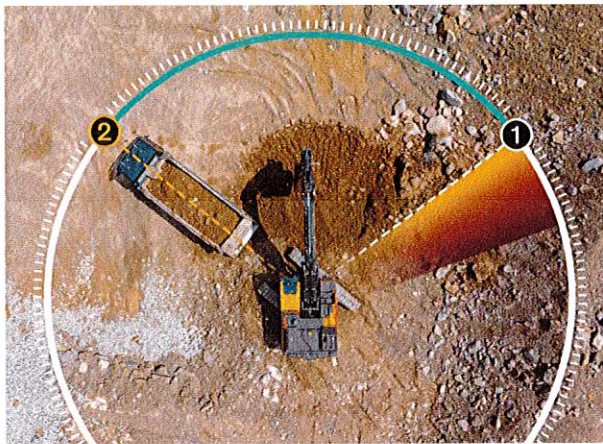


See it all

Operators can work in complete confidence thanks to Volvo Smart View. The system uses front, rear and side cameras to provide a real-time, overhead view of the machine during operation on the colour monitor. The result is safer machine rotation while working, especially in confined spaces.




A smoother shift

New boom and arm bouncing reduction technology reduces machine shock, resulting in a more comfortable and productive operator performance. Comfort Drive Control further helps to reduce fatigue by enabling operators to steer the machine using the joystick rollers instead of the pedals.

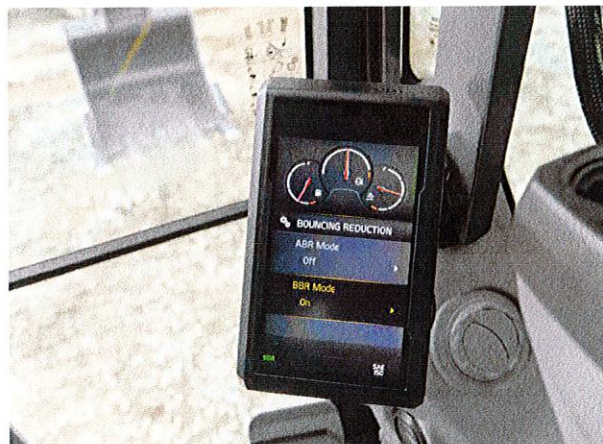

How you like it

Get ready for the working day in no time with customizable settings, including preferred control patterns easily selected from the monitor. New 'long push' functionality on the joystick allows operators to set an additional shortcut function, and with the L8 joystick operators can create a shortcut to hydraulic priority functions.

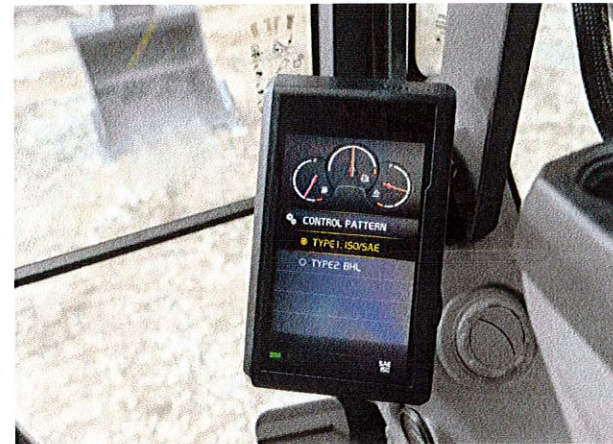


Boost versatility

Get the most out of your excavator with our range of purpose-built attachments, designed to work in perfect harmony with your machine. Customize your EC300E with quality Volvo attachments, matched to your needs, to form one solid and reliable unit that delivers improved cycle times and increased fuel efficiency.

Buckets of productivity

Volvo buckets are the perfect tool to achieve maximum productivity when digging and re-handling in all conditions. Whether you are working with soft, medium or hard materials, our buckets deliver long life and feature original Volvo wear parts. Heavy-Duty variants provide optimum performance when digging in compact materials.

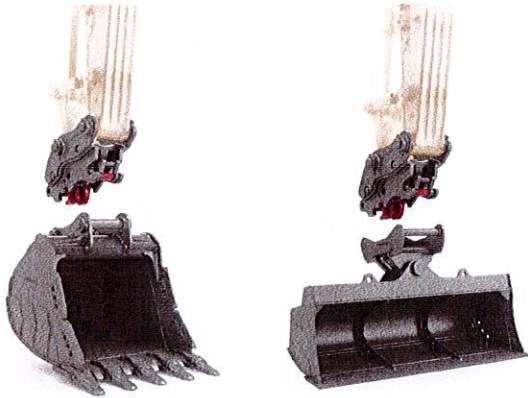

Take a break

Available with a full range of tools, the hydraulic breakers are designed to be a perfect match for your Volvo. Powered by the machine's constant auxiliary hydraulic flow, the breakers are configured to the specific weights of Volvo machines and are fully compatible with Volvo quick couplers for swift, safe and simple attachment changes.



Dig at any angle

Boost productivity and dig at any angle. Compatibility with Steelwrist®, Engcon® and Rototilt® tiltrotators provides the flexibility needed for precise construction jobs. The factory-fitted preparation system gives you the power to control both the excavator and tiltrotator using the original joysticks, with the information presented on the main display.



Stay cool

A new cooling layout increases hydraulic attachment cooling capacity by 10%, resulting in an improved attachment performance.



Steelwrist® : Steelwrist is a registered trademark of Steelwrist AB / Engcon® : Engcon is a registered trademark of Engcon Holding AB / Rototilt® : Rototilt is a registered trademark of Rototilt Group AB



EASY TO ATTACH

Discover our range of Volvo quick couplers, including the new Steelwrist® Auto Connect Quick Coupler – enabling the quick and easy connection of hydraulic attachments from the comfort and safety of the cab. The quick coupler delivers 300 liters (79 gallons) per minute of hydraulic flow directly to the attachment.



POWERED BY EXCELLENCE

With impressively high torque at low rpm, the new D8M Volvo engine builds on generations of proven Volvo engine technology to deliver superior reliability and performance. The engine features auto-regeneration technology, while auto-engine idle and auto-engine shutdown reduce unnecessary fuel consumption and wear.

Lower maintenance costs

Durable by design, the new EC300E is ready to take on the toughest applications. The machine delivers outstanding levels of reliability and with features including engine auto-regeneration, reinforced components and reduced maintenance requirements, you can count on the EC300E to maximize uptime while keeping maintenance costs to a minimum.


Less service requirements

The new electro-hydraulic system requires less hoses, therefore reducing the need for couplings, minimizing maintenance requirements and increasing reliability. Engine oil and engine oil filter change intervals have been doubled to 1000 hours, further ensuring the time and cost spent on maintenance is kept to a minimum.




Easier DEF filling

The new splash guard on the DEF tank makes filling quicker and easier, while also reducing the risk of spillage and subsequent corrosion.

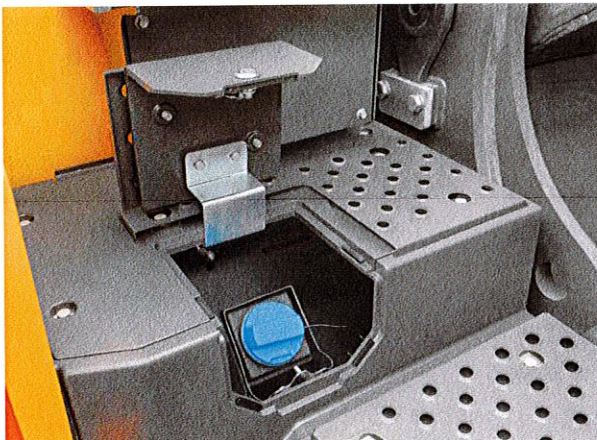

Up to the challenge

Built to deliver outstanding strength and durability, this heavy-duty production machine features a robust undercarriage with reinforced idle frame, track links and bottom rollers. Reinforced bucket linkage with steel strip, optional heavy-duty superstructure undercover and easily replaced bolt-on wear plates at the arm end ensure the excavator succeeds even on the toughest of jobsites.

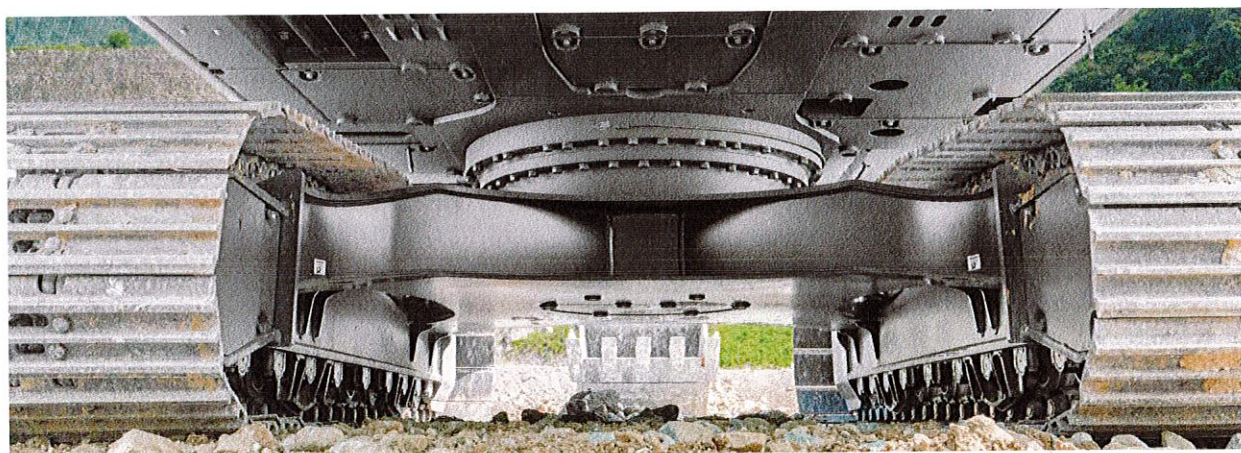

Boost your profits

A world-class machine is just the start of how Volvo strives to add value you to your operation. Our portfolio of services is designed to complement your machine's performance and boost your profitability.

Every part counts

Maintain productivity and machine uptime with our range of readily available, tested and approved parts – all backed by Volvo warranty. Only by using Genuine Volvo Parts, can you protect your investment, extend machine life and guarantee long-lasting performance.



Maintain performance

Stay on track with planned servicing and keep your asset covered with our range of flexible maintenance and repair options.



Powerful reporting

Keep track of your fleet with a comprehensive portfolio of reports, designed to help you take action and boost the profitability of your business. Powered by the CareTrack telematics system, Productivity Report, Fuel Efficiency Report & Summary Report each provide an easy-to-digest overview of your machine's condition and performance.



Machine monitoring made easy

Maximize machine uptime and reduce repair costs with the CareTrack telematic system. Choose to keep track of your machine yourself or let us take care of it with ActiveCare Direct. Our Volvo Uptime Center will provide 24/7 machine monitoring, supplying weekly reports and notifying you should preventive maintenance action be required.





GET THE MOST FROM YOUR MACHINE

While reliable and efficient machines of course play a vital role in reducing costs, enhancing safety and maximizing productivity, it is ultimately the performance of the operator that really makes the difference. We offer a wide range of training initiatives to help operators unlock the full capability of their Volvo excavator.

Move more for less

Boost versatility

- Steelwrist® Auto Connect Quick Coupler **NEW**
- Factory-fitted preparation for Steelwrist®, Engcon®, Rototilt® tiltrotator control systems **NEW**
- 10% more hydraulic attachment cooling capacity **NEW**
- Range of matched Volvo buckets and breakers
- Attachment Management System: 32 attachments stored

BOOST YOUR PRODUCTIVITY

- 700kg (1,542 lb) heavier counterweight: 5% increase in across lifting capacity **NEW**
- Improved response time **NEW**
- Boom/Swing and Boom/Travel priority **NEW**
- Adjustable boom down speed **NEW**
- Dig Assist apps, powered by Volvo Co-Pilot
- Volvo Active Control: double your productivity



UP TO 10% BETTER FUEL EFFICIENCY

- Volvo D8M engine **NEW**
- New generation electro-hydraulic system **NEW**
- ECO mode
- Selectable work modes
- Boom float function
- Auto-engine idle and shutdown

For a dramatic improvement in fuel efficiency, look no further than the EC300E Hybrid.



LOWER MAINTENANCE COSTS

- Less hydraulic hoses: reduced need for couplings/oil **NEW**
- Splash guard on the DEF tank **NEW**
- 1000hr engine oil and engine oil filter change intervals **NEW**
- Engine auto-regeneration **NEW**
- Grouped filters, accessed from ground-level
- Reinforced idle frame, track links, bottom rollers

SAFETY, INSIDE AND OUT

- 3-point right-hand side access to the upper structure **NEW**
- Bolted anti-slip steps, high visibility handrails
- ROPS cab, low-noise/vibration
- Rear and side cameras, Volvo Smart View
- Swing fence, height/depth limits functions (Volvo Active Control)

COMFORTABLE OPERATION

- Boom and arm bouncing reduction **NEW**
- Comfort Drive Control: joysticks steering **NEW**
- Additional 'long push' shortcut button **NEW**
- Selectable control pattern
- Volvo Care Cab: highest levels of comfort

Volvo Services: boost your profits

- Operator training program
- Productivity Report, Fuel Efficiency Report, Summary Report
- ActiveCare Direct: 24/7 machine monitoring
- Genuine Volvo Parts, with 24-hour delivery guarantee
- Maintenance and repair agreements

Volvo EC300E in detail

Engine

The next-generation Volvo diesel engine uses Volvo Advanced Combustion Technology (V-ACT) to deliver lower emissions, superior performance and fuel efficiency. The engine uses precise, highpressure fuel injectors, turbo charger and intercooler, and electronic engine controls to optimize machine performance.

Engine	Volvo	D8M
Max power at	r/min (r/s)	1,600 (26.7)
Net, ISO 9249/SAE J1349	kW (hp)	188 (252)
Gross, ISO 14396/SAE J1995	kW (hp)	189 (253)
Max torque	Nm (ft lbf)	1,290 (951)
at engine speed	r/min (r/s)	1,400 (23.3)
No. of cylinders		6
Displacement	l (in ³)	7.7 (470)
Bore	mm (in)	110 (4.33)
Stroke	mm (in)	135 (5.3)

Electrical system

High-capacity electrical system that is well protected. Waterproof double-lock harness plugs are used to secure corrosion-free connections. The main relays and solenoid valves are shielded to prevent damage. The master switch is standard.

Voltage	V	24
Batteries	V	2 x 12
Battery capacity	Ah	170
Alternator	V/A	28 / 80
Start motor	V - kW	24 - 5.5

Undercarriage

The undercarriage has a robust X-shaped frame. Greased and sealed track chains are standard.

Track shoes		2 x 50
Link pitch	mm (in)	203.2 (7.9)
Shoe width	mm (in)	600 / 700 / 800 / 900 (23.6 / 27.6 / 31.5 / 35.4)
Shoe width, triple grouser	mm (in)	600 / 700 / 800 / 900 (23.6 / 27.6 / 31.5 / 35.4)
Shoe width, triple grouser (HD)	mm (in)	600 (23.6)
Shoe width, double grouser	mm (in)	700 (27.6)
Bottom rollers		2 x 9
Top rollers		2 x 2

Swing system

The swing system uses an axial piston motors, driving a planetary gearbox for maximum torque. An automatic holding brake and anti-rebound valve are standard.

Max. slew speed	r/min	11
Max. slew torque	kNm (ft lbf)	114.8 (84,655)

Travel System

Each track is powered by an automatic two-speed shift travel motor. The track brakes are multi-disc, spring-applied and hydraulic released. The travel motor, brake and planetary gears are well protected within the track frame.

Max. drawbar pull	kN (lbf)	248 (55,663)
Max. travel speed (low)	km/h (mi/h)	3.6 (2.2)
Max. travel speed (high)	km/h (mi/h)	5.4 (3.4)
Gradeability	°	35

Cab

The operator's cab has easy access via a wide door opening. The cab is supported on hydraulic dampening mounts to reduce shock and vibration levels. These along with sound absorbing lining provide low noise levels. The cab has excellent all-round visibility. The front windshield can easily slide up into the ceiling, and the lower front glass can be removed and stored in the side door.

Refrigerant of the type R134a is used when this machine is equipped with air conditioning. Contains fluorinated greenhouse gas R134a, Global Warming Potential 1,430 t CO₂-eq.

Hydraulic system

The hydraulic system, also known as the "Automatic Sensing Work Mode," is designed for high-productivity, high-digging capacity, high-maneuvering precision and excellent fuel economy. The summation system, boom, arm and swing priority along with boom, arm and bucket regeneration provides optimum performance.

Main pump, Type 2 x Variable displacement axial piston pumps

Maximum flow	l/min (gal/min)	2 x 276 (2 x 72.9)
--------------	-----------------	--------------------

Pilot pump, Type Gear Pump

Maximum flow	l/min (gal/min)	20.3 (5.4)
--------------	-----------------	------------

Relief valve setting pressure

Implement	MPa (psi)	33.3 / 36.3 (4,830 / 5,265)
Travel circuit	MPa (psi)	36.3 (5,265)
Slew circuit	MPa (psi)	28.9 (4,192)
Pilot circuit	MPa (psi)	3.9 (566)

Hydraulic Motors

Travel: Variable displacement axial piston motor with mechanical brake

Swing: Fixed displacement piston motor with mechanical brake

Hydraulic Cylinders

Mono boom		2
Bore x Stroke	ø x mm (ø x in)	140 x 1 480 (5.5 x 58.3)
2 piece boom		2
Bore x Stroke	ø x mm (ø x in)	140 x 1 480 (5.5 x 58.3)
Arm		1
Bore x Stroke	ø x mm (ø x in)	150 x 1 745 (5.9 x 68.7)
Bucket		1
Bore x Stroke	ø x mm (ø x in)	140 x 1 140 (5.5 x 44.9)
Bucket for LR boom		1
Bore x Stroke	ø x mm (ø x in)	100 x 865 (3.9 x 34.1)

Service Refill

Fuel tank	l (gal)	472 (124.7)
DEF/AdBlue® tank	l (gal)	50 (13)
Hydraulic system, total	l (gal)	385 (101.7)
Hydraulic tank	l (gal)	215 (56.8)
Engine oil	l (gal)	30 (7.9)
Engine coolant	l (gal)	44 (12)
Slew reduction unit	l (gal)	6.1 (1.6)
Travel reduction unit	l (gal)	2 x 6 (2 x 1.6)

Sound Level


Sound pressure level in cab according to ISO 6396

L _{pA}	dB	70
-----------------	----	----

External sound level according to ISO 6395 and EU Noise Directive 2000/14/EC

L _{WA}	dB	104
-----------------	----	-----

Specifications

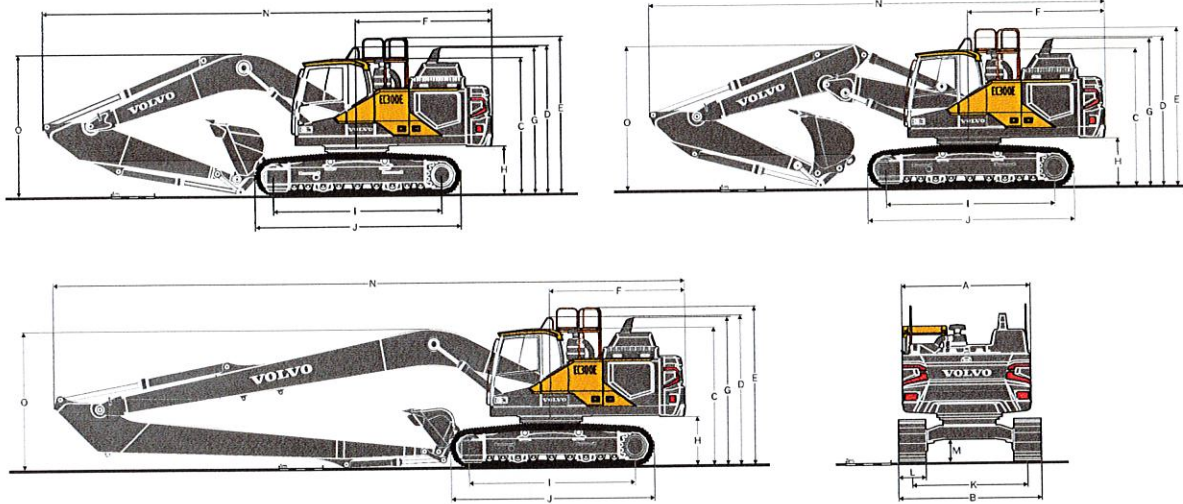

Description	Unit	EC300EL												EC300ELR	
		6.2, 20'4"						6.2, 20'4" 2-piece						10.2, 33'6"	
Boom	m, ft in	2.55	8'4"	3.05	10'0"	3.7	12'2"	2.55	8'4"	3.05	10'0"	3.7	12'2"	7.9	25'11"
Arm	m, ft in	2.55	8'4"	3.05	10'0"	3.7	12'2"	2.55	8'4"	3.05	10'0"	3.7	12'2"	7.9	25'11"
A. Overall width of upper structure	mm ft in	2,890	9'6"	2,890	9'6"	2,890	9'6"	2,890	9'6"	2,890	9'6"	2,890	9'6"	2,890	9'6"
B. Overall width	mm ft in	3,190	10'6"	3,190	10'6"	3,190	10'6"	3,190	10'6"	3,190	10'6"	3,190	10'6"	3,190	10'6"
C. Overall height of cab	mm ft in	3,110	10'2"	3,110	10'2"	3,110	10'2"	3,110	10'2"	3,110	10'2"	3,110	10'2"	3,110	10'2"
D. Overall height of handrail	mm ft in	3,360	11'0"	3,360	11'0"	3,360	11'0"	3,360	11'0"	3,360	11'0"	3,360	11'0"	3,360	11'0"
E. Overall height of guardrail (Unfolded)	mm ft in	3,570	11'9"	3,570	11'9"	3,570	11'9"	3,570	11'9"	3,570	11'9"	3,570	11'9"	3,570	11'9"
E'. Overall height of handrail/guardrail (Folded)	mm ft in	3,090	10'2"	3,090	10'2"	3,090	10'2"	3,090	10'2"	3,090	10'2"	3,090	10'2"	3,090	10'2"
F. Tail swing radius	mm ft in	3,120	10'3"	3,120	10'3"	3,120	10'3"	3,120	10'3"	3,120	10'3"	3,120	10'3"	3,155	10'4"
G. Overall height of diffuser	mm ft in	3,200	10'6"	3,200	10'6"	3,200	10'6"	3,200	10'6"	3,200	10'6"	3,200	10'6"	3,200	10'6"
H. Counterweight clearance *	mm ft in	1,105	3'8"	1,105	3'8"	1,105	3'8"	1,105	3'8"	1,105	3'8"	1,105	3'8"	1,105	3'8"
I. Tumbler length	mm ft in	4,015	13'2"	4,015	13'2"	4,015	13'2"	4,015	13'2"	4,015	13'2"	4,015	13'2"	4,015	13'2"
J. Track length	mm ft in	4,865	16'0"	4,865	16'0"	4,865	16'0"	4,865	16'0"	4,865	16'0"	4,865	16'0"	4,865	16'0"
K. Track gauge	mm ft in	2,590	8'6"	2,590	8'6"	2,590	8'6"	2,590	8'6"	2,590	8'6"	2,590	8'6"	2,590	8'6"
L. Shoe width	mm ft in	600	24"	600	24"	600	24"	600	24"	600	24"	600	24"	600	24"
M. Min. ground clearance *	mm ft in	475	1'7"	475	1'7"	475	1'7"	475	1'7"	475	1'7"	475	1'7"	475	1'7"
N. Overall length	mm ft in	10,605	34'10"	10,500	34'5"	10,540	34'7"	10,605	34'10"	10,535	34'7"	10,535	34'7"	14,565	47'9"
O. Overall height of boom	mm ft in	3,470	11'5"	3,345	11'0"	3,580	11'9"	3,385	11'1"	3,325	10'11"	3,605	11'10"	-	-

* Without shoe grouser

† 2-piece boom

DIMENSIONS

Boom		mono				2-piece		Long-Reach	
Description	Unit	6.2, 20'4" GP				6.2, 20'4"		10.2, 33'6"	
Boom	m, ft in								
Length	mm ft in	6,425	21'1"	6,425	21'1"	6,425	21'1"	10,425	34'2"
Height - Hose	mm ft in	1,780	5'10"	1,780	5'10"	1,595	5'3"	-	-
Height - Pipe	mm ft in	1,665	5'6"	1,665	5'6"	1,550	5'1"	1,580	5'2"
Width	mm ft in	765	2'6"	765	2'6"	770	2'6"	765	2'6"
Weight	kg lb	2,505	5,520	2,735	6,030	3,375	7,440	3,380	7,450



* Includes cylinder, piping and pin, excludes boom cylinder pin


Arm

Description	Unit	2.55, 8'4" HD		3.05, 10'0" GP		3.05, 10'0" HP		3.7, 12'2" GP		7.9, 25'11" LR	
Arm	m										
Length	mm ft in	3,720	12'2"	4,145	13'7"	4,145	13'7"	4,800	15'9"	9,055	29'8"
Height	mm ft in	1,005	3'4"	1,010	3'4"	1,010	3'4"	1,005	3'4"	1,095	3'7"
Width	mm ft in	560	1'10"	560	1'10"	560	1'10"	560	1'10"	435	1'5"
Weight	kg lb	1,450	3,200	1,510	3,330	1,570	3,460	1,630	3,590	1,770	3,900

* Includes cylinder, linkage and pin

Specifications

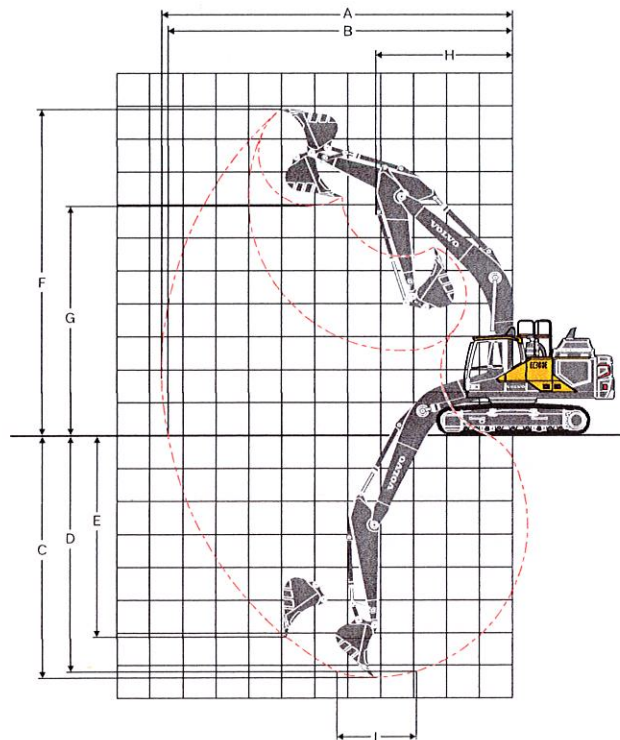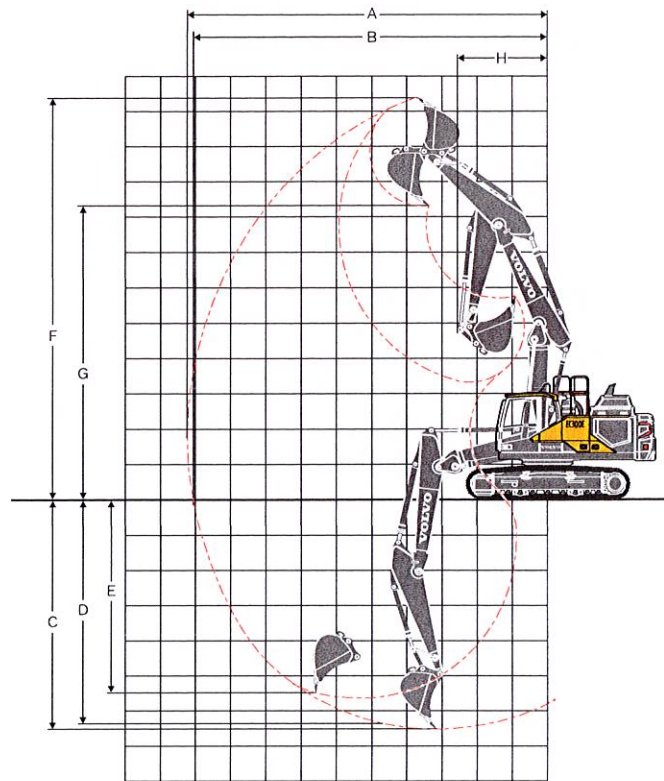

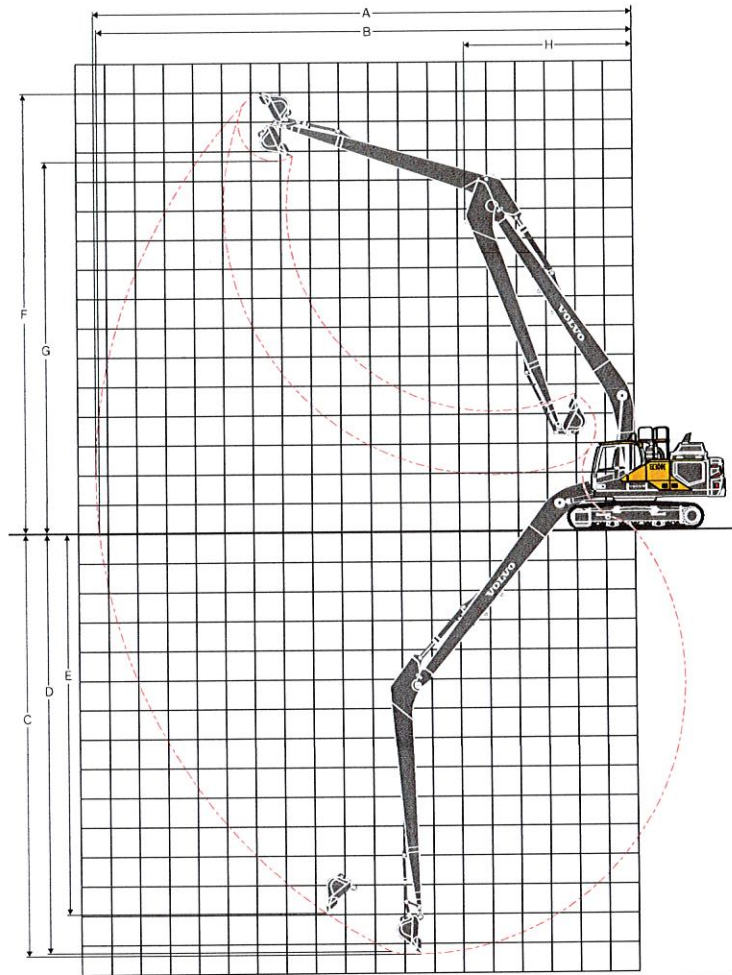

WORKING RANGES

Description	Unit	EC300EL												EC300ELR
Boom	m, ft in	6.2, 20'4" mono						6.2, 20'4" 2-piece						10.2, 33'6"
Arm	m ft in	2.55	8'4"	3.05	10'0"	3.7	12'2"	2.55	8'4"	3.05	10'0"	3.7	12'2"	7.9 25'11"
A. Max. digging reach	mm ft in	10,180	33'5"	10,710	35'2"	11,310	37'1"	10,250	33'8"	10,780	35'4"	11,390	37'4"	18,590 60'12"
B. Max. digging reach on ground	mm ft in	9,970	32'9"	10,520	34'6"	11,130	36'6"	10,040	32'11"	10,580	34'9"	11,210	36'9"	18,480 60'8"
C. Max. digging depth	mm ft in	6,840	22'5"	7,340	24'1"	7,990	26'3"	6,210	20'4"	6,730	22'1"	7,370	24'2"	14,750 48'5"
D. Max. digging depth (l = 2.44 m / 8'0" level)	mm ft in	6,600	21'8"	7,150	23'5"	7,830	25'8"	6,100	20'0"	6,630	21'9"	7,280	23'11"	14,650 48'1"
E. Max. vertical wall digging depth	mm ft in	5,320	17'5"	6,080	19'11"	6,680	21'11"	5,040	16'6"	5,630	18'6"	6,240	20'6"	13,630 44'9"
F. Max. cutting height	mm ft in	9,560	31'4"	9,980	32'9"	10,260	33'8"	11,550	37'11"	12,070	39'7"	12,570	41'3"	14,940 49'0"
G. Max. dumping height	mm ft in	6,680	21'11"	7,040	23'1"	7,330	24'1"	8,360	27'5"	8,850	29'0"	9,360	30'9"	12,600 41'4"
H. Min. front swing radius	mm ft in	4,220	13'10"	4,180	13'9"	4,240	13'11"	2,750	9'0"	2,580	8'6"	2,770	9'1"	6,190 20'4"

DIGGING FORCES WITH DIRECT FIT BUCKET

Bucket radius			mm	in	1,624	64"	1,624	64"	1,624	64"	1,624	64"	1,624	64"	1,624	64"	1,248	49"
Breakout force	Normal	SAE J1179	kN	lb	165	37,050	165	37,050	165	37,040	165	37,050	165	37,050	165	37,040	69	15,580
	Power boost		kN	lb	179	40,320	179	40,320	179	40,310	179	40,320	179	40,320	179	40,310	69	15,580
	Normal	ISO 6015	kN	lb	190	42,680	190	42,680	190	42,670	190	42,680	190	42,680	190	42,670	78	17,600
	Power boost		kN	lb	207	46,450	207	46,450	207	46,440	207	46,450	207	46,450	207	46,440	78	17,600
Tearout force	Normal	SAE J1179	kN	lb	158	35,500	133	29,790	116	26,090	158	35,500	133	29,790	116	26,090	51	11,550
	Power boost		kN	lb	172	38,630	144	32,420	126	28,400	172	38,630	144	32,420	126	28,400	51	11,550
	Normal	ISO 6015	kN	lb	163	36,580	136	30,550	118	26,630	163	36,580	136	30,550	118	26,630	52	11,660
	Power boost		kN	lb	177	39,810	148	33,250	129	28,980	177	39,810	148	33,250	129	28,980	52	11,660
Rotation angle, bucket				°	179		179		179		179		179		179		178	

Specifications

MACHINE WEIGHTS AND GROUND PRESSURE

Description	Shoe width		Operating weight		Ground pressure		Overall width		Operating weight		Ground pressure		Overall width	
	mm	in	kg	lb	kPa	psi	mm	in	kg	lb	kPa	psi	mm	in
EC300EL														
			6.2 m (20'4") boom (GP), 3.05 m (10'0") arm (GP), 1,209 kg (2,670 lb) / 1.32 m³ (349 gal) bucket, 6,200 kg (13,670 lb) counterweight						6.2 m (20'4") boom (HD), 3.05 m (10'0") arm (HD), 1,209 kg (2,670 lb) / 1.32 m³ (349 gal) bucket, 6,200 kg (13,670 lb) counterweight					
Triple grouser	600	24	30,640	67,560	59.1	8.6	3,190	10'6"	30,940	68,220	59.7	8.7	3,190	10'6"
	600 (HD)	24	30,860	68,050	59.5	8.6	3,190	10'6"	31,150	68,690	60.1	8.7	3,190	10'6"
	700	28	31,230	68,860	51.6	7.5	3,290	10'10"	31,520	69,500	52.1	7.6	3,290	10'10"
	800	31	31,590	69,660	45.7	6.6	3,390	11'1"	31,880	70,300	46.1	6.7	3,390	11'1"
Double grouser	900	35	31,950	70,450	41.1	6.0	3,490	11'5"	32,240	71,090	41.5	6.0	3,490	11'5"
	700	28	31,420	69,280	52.0	7.5	3,290	10'10"	31,710	69,920	52.4	7.6	3,290	10'10"
			6.2 m (20'4") boom (2-piece), 3.05 m (10'0") arm (GP), 1,209 kg (2,670 lb) / 1.32 m³ (349 gal) bucket, 6,200 kg (13,670 lb) counterweight						6.2 m (20'4") boom (2-piece), 3.05 m (10'0") arm (HD), 1,209 kg (2,670 lb) / 1.32 m³ (349 gal) bucket, 6,200 kg (13,670 lb) counterweight					
Triple grouser	600	24	31,230	68,860	60.3	8.7	3,190	10'6"	31,610	69,700	61.0	8.8	3,190	10'6"
	600 (HD)	24	31,450	69,350	60.7	8.8	3,190	10'6"	31,820	70,160	61.4	8.9	3,190	10'6"
	700	28	31,820	70,160	52.6	7.6	3,290	10'10"	32,190	70,980	53.2	7.7	3,290	10'10"
	800	31	32,180	70,960	46.6	6.7	3,390	11'1"	32,550	71,770	47.1	6.8	3,390	11'1"
Double grouser	900	35	32,540	71,750	41.9	6.1	3,490	11'5"	32,910	72,570	42.3	6.1	3,490	11'5"
	700	28	32,010	70,580	52.9	7.7	3,290	10'10"	32,380	71,400	53.5	7.8	3,290	10'10"
EC300ELR														
			10.2 m (33'6") boom (LR), 7.9 m (25'11") arm (LR), 478 kg (1,050 lb) / 0.57 m³ (150 gal) bucket, 6,900 kg (15,210 lb) counterweight											
Triple grouser	600	24	31,770	70,050	61.3	8.9	3,190	10'6"						
	600 (HD)	24	31,980	70,520	61.7	8.9	3,290	10'10"						
	800	31	32,710	72,130	47.3	6.9	3,390	11'1"						
	900	35	33,080	72,940	42.5	6.2	3,490	11'5"						

BUCKET SELECTION GUIDE

Bucket type		Capacity		Cutting width		Weight		Teeth	EC300EL					
									600 mm (24") shoe, 6,200 kg (13,670 lb) counterweight					
									6.2 m (20'4") GP Boom			5.95 m (19'6") 2-piece Boom		
									2.55 m (8'4")	3.05 m (10'0")	3.7 m (12'2")	2.55 m (8'4")	3.05 m (10'0")	3.7 m (12'2")
Direct fit bucket	General purpose	550	0.72	600	23.6	883	1,946	3	C	C	C	C	C	C
		660	0.86	750	29.5	867	1,912	3	C	C	C	C	C	C
		770	1.01	900	35.4	996	2,197	4	C	C	C	C	C	C
		950	1.24	1,090	42.9	1,025	2,260	4	C	C	C	C	C	C
		1,140	1.49	1,240	48.8	1,192	2,629	5	C	C	C	C	C	C
		1,320	1.73	1,390	54.7	1,209	2,666	5	C	C	C	C	C	C
		1,450	1.90	1,490	58.7	1,270	2,799	5	C	C	C	C	C	C
		1,510	1.98	1,540	60.6	1,314	2,897	5	C	C	C	C	C	C
		1,760	2.30	1,740	68.5	1,448	3,193	6	C	C	B	C	C	B
		1,930	2.52	1,840	72.4	1,529	3,370	6	C	C	B	C	B	A
		2,060	2.69	1,950	76.8	1,590	3,506	6	C	B	A	C	B	A
	Heavy duty	550	0.72	600	23.6	881	1,942	3	D	D	D	D	D	D
		660	0.86	750	29.5	920	2,029	3	D	D	D	D	D	D
		1,140	1.49	1,240	48.8	1,214	2,677	5	D	D	D	D	D	D
		1,270	1.66	1,405	55.3	1,336	2,945	5	D	D	D	D	D	D
		1,320	1.73	1,390	54.7	1,301	2,868	5	D	D	D	D	D	D
		1,510	1.98	1,540	60.6	1,387	3,058	5	D	D	D	D	D	C
		1,690	2.21	1,690	66.5	1,485	3,274	5	D	D	B	D	D	B
		1,930	2.52	1,840	72.4	1,623	3,578	6	C	B	A	C	B	A
Direct fit bucket (UQC interface)	General purpose	550	0.72	600	23.6	883	1,946	3	C	C	C	C	C	C
		660	0.86	750	29.5	867	1,912	3	C	C	C	C	C	C
		770	1.01	900	35.4	996	2,197	4	C	C	C	C	C	C
		950	1.24	1,090	42.9	1,025	2,260	4	C	C	C	C	C	C
		1,140	1.49	1,240	48.8	1,192	2,629	5	C	C	C	C	C	C
		1,320	1.73	1,390	54.7	1,209	2,666	5	C	C	C	C	C	C
		1,450	1.90	1,490	58.7	1,270	2,799	5	C	C	C	C	C	B
		1,510	1.98	1,540	60.6	1,314	2,897	5	C	C	B	C	C	B
		1,760	2.30	1,740	68.5	1,448	3,193	6	C	B	A	C	B	A
		1,930	2.52	1,840	72.4	1,529	3,370	6	B	B	A	B	A	x
		2,060	2.69	1,950	76.8	1,590	3,506	6	B	A	x	B	A	x
	Heavy duty	550	0.72	600	23.6	881	1,942	3	D	D	D	D	D	D
		660	0.86	750	29.5	920	2,029	3	D	D	D	D	D	D
		1,140	1.49	1,240	48.8	1,214	2,677	5	D	D	D	D	D	D
		1,320	1.73	1,390	54.7	1,301	2,868	5	D	D	C	D	D	C
		1,510	1.98	1,540	60.6	1,387	3,058	5	D	D	B	D	C	B
		1,690	2.21	1,690	66.5	1,485	3,274	5	D	B	A	C	B	A
		1,930	2.52	1,840	72.4	1,623	3,578	6	B	A	x	B	A	x

For long reach boom and arm configuration, Volvo recommends to use 0.57 m³ (0.75 yd³) bucket.
Please consult with your Volvo dealer for the proper match of buckets and attachments to suit the application.
The recommendations are given as a guide only, based on typical operation conditions.
Bucket capacity based on ISO 7451, heaped material with a 1:1 angle of repose.

Maximum material density

	kg/m ³	lb/yd ³	
A	1,200~1,300	2,000~2,200	Coal, Caliche, Shale
B	1,400~1,600	2,300~2,700	Wet earth and clay, Limestone, Sandstone
C	1,700~1,800	2,800~3,100	Granite, Wet sand, Well blasted rock
D	> 1,900	> 3,200	Wet mud, Iron ore
X	Not recommended		

Specifications

LIFTING CAPACITY EC300EL

Lifting capacity at the arm end without bucket.

For lifting capacity including bucket, simply subtract actual weight of the direct fit bucket or the bucket with quick coupler from the following values.

	Lifting Point	1.5 m, 5 ft		3.0 m, 10 ft		4.5 m, 15 ft		6.0 m, 20 ft		7.5 m, 25 ft		9.0 m, 30 ft		Max. Reach		
		Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Max.
Boom : 6.2 m , 20'34" Arm : 2.55 m, 8'4" Shoe : 600 mm, 24" CWT : 6,200 kg, 13,670 lb	7.5 m kg							*7,740	*7,740					*7,900	7,640	6.52 m
	25 ft lb							*17,180	*17,180					*17,450	17,300	21.04 ft
	6.0 m kg							*8,080	*8,080	*7,890	6,040			*7,900	5,970	7.55 m
	20 ft lb							*17,660	*17,660					*17,420	13,320	24.60 ft
	4.5 m kg					*11,410	*11,410	*9,190	8,330	*8,220	5,930			*7,940	5,160	8.18 m
	15 ft lb					*24,500	*24,500	*19,940	17,970	*17,970	12,770			*17,600	11,440	26.76 ft
	3.0 m kg					*14,580	11,950	*10,630	7,930	*8,890	5,740			*7,370	4,760	8.50 m
	10 ft lb					*31,310	25,820	*23,000	17,120	19,250	12,390			*16,280	10,520	27.86 ft
	1.5 m kg					*16,750	11,340	*11,900	7,590	8,740	5,570			*7,220	4,630	8.54 m
	5 ft lb					*36,130	24,460	*25,760	16,380	18,830	12,020			*15,910	10,220	28.01 ft
	0 m kg					*17,340	11,140	12,030	7,390	8,610	5,450			*7,440	4,750	8.31 m
	0 ft lb					*37,580	23,990	25,890	15,940	18,560	11,770			*16,410	10,480	27.25 ft
	-1.5 m kg			*12,880	*12,880	*16,910	11,150	11,970	7,340	8,590	5,430			*8,170	5,190	7.78 m
	-5 ft lb			*29,370	*29,370	*36,700	24,000	25,760	15,830	18,530	11,740			*18,050	11,470	25.48 ft
	-3.0 m kg			*21,080	*21,080	*15,540	11,310	*11,740	7,430					*9,850	6,200	6.88 m
	-10 ft lb			*45,790	*45,790	*33,640	24,350	*25,310	16,040					*21,770	13,770	22.46 ft
	-4.5 m kg			*16,820	*16,820	*12,520	11,670							*10,110	8,870	5.44 m
	-15 ft lb			*36,120	*36,120	*26,730	25,170							*22,290	20,070	17.54 ft
Boom : 6.2 m , 20'34" Arm : 3.05 m, 10'0" Shoe : 600 mm, 24" CWT : 6,200 kg, 13,670 lb	7.5 m kg													*6,380	*6,380	7.20 m
	25 ft lb													*14,340	*14,340	23.32 ft
	6.0 m kg									*7,240	6,130			*6,120	5,320	8.15 m
	20 ft lb									*15,950	13,210			*13,690	11,880	26.57 ft
	4.5 m kg					*10,280	*10,280	*8,540	8,440	*7,710	5,990			*6,120	4,680	8.73 m
	15 ft lb							*18,510	18,210	*16,850	12,910			*13,640	10,370	28.58 ft
	3.0 m kg					*13,480	12,210	*10,050	8,020	*8,470	5,780	*6,600	4,370	*6,330	4,350	9.03 m
	10 ft lb					*28,820	26,210	*21,680	17,250	*18,410	12,450			*14,080	9,600	29.61 ft
	1.5 m kg					*16,040	11,470	*11,460	7,640	8,760	5,580	6,670	4,290	*6,600	4,240	9.07 m
	5 ft lb					*34,380	24,510	*24,710	16,380	18,840	12,000			*14,540	9,340	29.76 ft
	0 m kg					*17,170	11,140	12,040	7,390	8,600	5,430			*6,770	4,330	8.85 m
	0 ft lb					*36,920	23,730	25,780	15,820	18,470	11,670			*14,920	9,530	29.04 ft
	-1.5 m kg	*7,610	*7,610	*11,750	*11,750	*17,140	11,070	11,920	7,290	8,530	5,370			*7,330	4,660	8.36 m
	-5 ft lb	*17,240	*17,240	*26,870	*26,870	*36,930	23,580	25,520	15,600	18,340	11,550			*16,170	10,280	27.38 ft
	-3.0 m kg	*13,880	*13,880	*19,440	*19,440	*16,140	11,170	11,970	7,330	8,610	5,440			*8,560	5,420	7.53 m
	-10 ft lb	*31,360	*31,360	*44,400	*44,400	*34,750	23,830	25,650	15,710					*18,970	11,990	24.61 ft
	-4.5 m kg			*18,990	*18,990	*13,800	11,450	*10,080	7,560					*9,460	7,180	6.24 m
	-15 ft lb			*40,570	*40,570	*29,460	24,520	*21,200	16,310					*20,800	16,080	20.23 ft
Boom : 6.2 m, 20'34" Arm : 3.7 m, 12'2" Shoe : 600 mm, 24" CWT : 6,200 kg, 13,670 lb	7.5 m kg									*6,290	6,220			*4,930	*4,930	7.96 m
	25 ft lb									*12,940	*12,940			*10,930	*10,930	25.82 ft
	6.0 m kg									*6,390	6,170			*4,750	4,660	8.82 m
	20 ft lb									*14,060	13,270			*10,490	10,370	28.78 ft
	4.5 m kg							*7,580	*7,580	*6,980	6,010	*6,390	4,450	*4,750	4,150	9.36 m
	15 ft lb							*16,450	*16,450	*15,260	12,940	*12,690	9,550	*10,460	9,190	30.64 ft
	3.0 m kg					*11,960	*11,960	*9,180	8,110	*7,840	5,790	6,740	4,350	*4,900	3,880	9.64 m
	10 ft lb					*25,720	*25,720	*19,870	17,490	*17,060	12,470	14,510	9,350	*10,780	8,560	31.60 ft
	1.5 m kg					*14,940	11,680	*10,770	7,690	*8,730	5,560	6,620	4,230	*5,200	3,780	9.67 m
	5 ft lb					*32,220	25,180	*23,320	16,580	18,840	11,990	14,250	9,110	*11,460	8,340	31.74 ft
	0 m kg			*6,730	*6,730	*16,680	11,190	*11,960	7,380	8,550	5,380	6,520	4,140	*5,730	3,840	9.47 m
	0 ft lb			*15,390	*15,390	*36,090	24,100	*25,910	15,920	18,410	11,600	14,040	8,920	*12,630	8,480	31.07 ft
	-1.5 m kg	*6,940	*6,940	*10,930	*10,930	*17,190	11,010	11,870	7,220	8,440	5,280	6,480	4,100	*6,470	4,100	9.01 m
	-5 ft lb	*15,520	*15,520	*24,780	*24,780	*37,250	23,700	25,510	15,570	18,170	11,390			*14,290	9,050	29.53 ft
	-3.0 m kg	*11,570	*11,570	*16,550	*16,550	*16,670	11,030	11,840	7,200	8,440	5,280			*7,370	4,650	8.25 m
	-10 ft lb	*25,970	*25,970	*37,550	*37,550	*36,120	23,750	25,460	15,530	18,190	11,400			*16,340	10,320	26.98 ft
	-4.5 m kg	*17,310	*17,310	*21,340	*21,340	*15,000	11,220	*11,150	7,330					*8,820	5,830	7.10 m
	-15 ft lb	*39,050	*39,050	*46,020	*46,020	*32,320	24,180	*23,900	15,820					*19,480	13,060	23.07 ft
	-6.0 m kg			*15,770	*15,770	*11,150	11,150							*9,030	*9,030	5.29 m
	-20 ft lb			*33,270	*33,270	*23,290	23,290							*19,890	*19,890	16.85 ft

Notes: 1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities. 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards. 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.

LIFTING CAPACITY EC300EL

Lifting capacity at the arm end without bucket.

For lifting capacity including bucket, simply subtract actual weight of the direct fit bucket or the bucket with quick coupler from the following values.

	Lifting Point	1.5 m, 5 ft		3.0 m, 10 ft		4.5 m, 15 ft		6.0 m, 20 ft		7.5 m, 25 ft		9.0 m, 30 ft		Max. Reach		
		Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Max.
Boom : 6.2 m, 20'34" Arm : 2.55 m, 8'4" Shoe : 800 mm, 32" CWT : 6,200 kg, 13,670 lb	7.5 m kg							*7,700	*7,700					*7,860	*7,860	6.52 m
	25 ft lb							*17,100	*17,100					*17,360	*17,360	21.04 ft
	6.0 m kg							*8,040	*8,040	*7,840	6,240			*7,850	6,170	7.55 m
	20 ft lb							*17,570	*17,570					*17,300	13,780	24.60 ft
	4.5 m kg					*11,350	*11,350	*9,140	8,620	*8,160	6,130			*7,990	5,340	8.18 m
	15 ft lb					*24,370	*24,370	*19,820	18,590	*17,850	13,210			*17,610	11,830	26.76 ft
	3.0 m kg					*14,480	12,350	*10,560	8,190	*8,820	5,940			7,660	4,920	8.50 m
	10 ft lb					*31,090	26,680	*22,840	17,690	*19,200	12,810			16,910	10,870	27.86 ft
	1.5 m kg					*16,620	11,700	*11,810	7,840	9,080	5,750			7,490	4,790	8.54 m
	5 ft lb					*35,850	25,240	*25,560	16,920	19,560	12,420			16,530	10,560	28.01 ft
	0 m kg					*17,200	11,490	12,490	7,630	8,940				17,040	10,830	27.25 ft
	0 ft lb					*37,270	24,740	26,870	16,460	19,270	12,150			17,040	10,830	27.25 ft
	-1.5 m kg			*12,880	*12,880	*16,770	11,490	12,420	7,570	8,920	5,610			8,480	5,360	7.78 m
	-5 ft lb			*29,370	*29,370	*36,390	24,740	26,720	16,330	19,230	12,120			18,740	11,840	25.48 ft
	-3.0 m kg			*20,880	*20,880	*15,400	11,660	*11,630	7,660					*9,770	6,400	6.88 m
	-10 ft lb			*45,350	*45,350	*33,340	25,100	*25,080	16,550					*21,570	14,210	22.46 ft
	-4.5 m kg			*16,640	*16,640	*12,400	12,030							*10,010	9,150	5.44 m
	-15 ft lb			*35,730	*35,730	*26,450	25,950							*22,050	20,710	17.54 ft
Boom : 6.2 m, 20'34" Arm : 3.05 m, 10'0" Shoe : 800 mm, 32" CWT : 6,200 kg, 13,670 lb	7.5 m kg													*6,470	*6,470	7.20 m
	25 ft lb													*14,340	*14,340	23.32 ft
	6.0 m kg									*7,190	6,360			*6,200	5,510	8.15 m
	20 ft lb									*15,850	13,670			*13,690	12,290	26.57 ft
	4.5 m kg					*10,200	*10,200	*8,480	*8,480	*7,660	6,200			*6,200	4,840	8.73 m
	15 ft lb							*18,400	*18,400	*16,730	13,360			*13,640	10,730	28.58 ft
	3.0 m kg					*13,320	12,550	*9,950	8,270	*8,390	5,970	*6,680	4,520	*6,400	4,500	9.03 m
	10 ft lb					*28,630	27,100	*21,540	17,850	*18,270	12,880			*14,080	9,930	29.61 ft
	1.5 m kg					*15,820	11,730	*11,320	7,840	9,080	5,750	6,930	4,420	*6,830	4,380	9.07 m
	5 ft lb					*34,120	25,310	*24,520	16,940	19,570	12,400			*15,030	9,650	29.76 ft
	0 m kg					*16,910	11,370	*12,230	7,570	8,900	5,590			7,030	4,460	8.85 m
	0 ft lb					*36,630	24,490	*26,510	16,340	19,190	12,060			15,490	9,850	29.04 ft
	-1.5 m kg	*7,690	*7,690	*11,840	*11,840	*16,890	11,300	12,310	7,460	8,830	5,520			7,600	4,810	8.36 m
	-5 ft lb	*17,240	*17,240	*26,870	*26,870	*36,620	24,320	26,490	16,100	19,040	11,930			16,790	10,620	27.38 ft
	-3.0 m kg	*13,970	*13,970	*19,530	*19,530	*15,900	11,420	*11,950	7,510	8,920	5,600			8,870	5,580	7.53 m
	-10 ft lb	*31,360	*31,360	*44,400	*44,400	*34,440	24,580	*25,840	16,210					19,690	12,380	24.61 ft
	-4.5 m kg			*18,650	*18,650	*13,580	11,730	*9,940	7,770					*9,330	7,380	6.24 m
	-15 ft lb			*40,150	*40,150	*29,170	25,300	*20,990	16,840					*20,590	16,600	20.23 ft
Boom : 6.2 m, 20'34" Arm : 3.7 m, 12'2" Shoe : 800 mm, 32" CWT : 6,200 kg, 13,670 lb	7.5 m kg									*6,260	*6,260			*4,930	*4,930	7.96 m
	25 ft lb									*12,940	*12,940			*10,930	*10,930	25.82 ft
	6.0 m kg									*6,350	*6,350			*4,750	*4,750	8.82 m
	20 ft lb									*13,980	13,760			*10,490	*10,490	28.78 ft
	4.5 m kg							*7,540	*7,540	*6,940	6,230	*6,390	4,610	*4,750	4,300	9.36 m
	15 ft lb							*16,370	*16,370	*15,160	13,410	*12,690	9,890	*10,460	9,520	30.64 ft
	3.0 m kg					*11,890	*11,890	*9,120	8,390	*7,780	5,990	7,020	4,500	*4,900	4,010	9.64 m
	10 ft lb					*25,580	*25,580	*19,750	18,100	*16,940	12,920	15,100	9,680	*10,780	8,870	31.60 ft
	1.5 m kg					*14,830	12,070	*10,690	7,950	*8,670	5,760	6,880	4,380	*5,200	3,910	9.67 m
	5 ft lb					*31,990	26,010	*23,150	17,150	*18,830	12,410	14,820	9,430	*11,460	8,630	31.74 ft
	0 m kg			*6,730	*6,730	*16,550	11,550	*11,860	7,630	8,890	5,570	6,780	4,280	*5,730	3,980	9.47 m
	0 ft lb			*15,390	*15,390	*35,800	24,880	*25,700	16,450	19,140	12,000	14,600	9,230	*12,630	8,770	31.07 ft
	-1.5 m kg	*6,940	*6,940	*10,930	*10,930	*17,040	11,360	12,320	7,460	8,770	5,460	*6,710	4,240	*6,590	4,240	9.01 m
	-5 ft lb	*15,520	*15,520	*24,780	*24,780	*36,940	24,450	26,480	16,080	18,880	11,770			*14,580	9,360	29.53 ft
	-3.0 m kg	*11,570	*11,570	*16,550	*16,550	*16,530	11,380	*12,260	7,430	8,760	5,450			7,660	4,810	8.25 m
	-10 ft lb	*25,970	*25,970	*37,550	*37,550	*35,800	24,490	26,430	16,030	18,890	11,780			16,970	10,660	26.98 ft
	-4.5 m kg	*17,310	*17,310	*21,140	*21,140	*14,860	11,580	*11,040	7,560					*19,290	13,490	23.07 ft
	-15 ft lb	*39,050	*39,050	*45,580	*45,580	*32,020	24,940	*23,680	16,340					*8,930	*8,930	5.29 m
	-6.0 m kg			*15,590	*15,590	*11,030	11,030									
	-20 ft lb			*32,890	*32,890	*23,030	23,030							*19,660	*19,660	16.85 ft

Notes: 1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities. 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards. 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.

Specifications

LIFTING CAPACITY EC300EL

Lifting capacity at the arm end without bucket.

For lifting capacity including bucket, simply subtract actual weight of the direct fit bucket or the bucket with quick coupler from the following values.

	Lifting Point	1.5 m, 5 ft		3.0 m, 10 ft		4.5 m, 15 ft		6.0 m, 20 ft		7.5 m, 25 ft		9.0 m, 30 ft		Max. Reach		
		Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Max.
Boom : 6.2 m, 20'34" 2-piece Arm : 2.55 m, 8'4" Shoe : 600 mm, 24" CWT : 6,200 kg, 13,670 lb	9.0 m kg					*11,710	*11,710							*10,640	*10,640	4.94 m
	30 ft lb					*25,816	*25,816							*23,457	*23,457	16.21 ft
	7.5 m kg					*11,290	*11,290	*10,050	8,810					*9,320	*7,450	6.61 m
	25 ft lb					*24,890	*24,890	*22,156	19,423					*20,547	*16,424	21.69 ft
	6.0 m kg			*12,170	*12,170	*12,290	*12,290	*10,310	8,660	*9,210	6,000			*8,900	*5,820	7.63 m
	20 ft lb			*26,830	*26,830	*27,095	*27,095	*22,730	19,092	*20,305	13,228			*19,621	*12,831	25.03 ft
	4.5 m kg					*14,310	12,900	*11,120	8,300	9,170	5,880			*7,840	*5,030	8.25 m
	15 ft lb					*31,548	28,440	*24,515	18,298	20,216	12,963			*17,284	*11,089	27.07 ft
	3.0 m kg					*16,440	11,850	*12,040	7,860	8,940	5,680			*7,280	*4,640	8.56 m
	10 ft lb					*36,244	26,125	*26,544	17,328	19,709	12,522			*16,050	*10,229	28.08 ft
	1.5 m kg							12,260	7,490	8,730	5,490			*7,120	*4,510	8.60 m
	5 ft lb							27,029	16,513	19,246	12,103			*15,697	*9,943	28.22 ft
	0 m kg					*16,280	10,980	12,010	7,280	8,600	5,370			*7,350	*4,630	8.37 m
	0 ft lb					*35,891	24,207	26,477	16,050	18,960	11,839			*16,204	*10,207	27.46 ft
	-1.5 m kg					*14,390	11,010	*11,290	7,230	*8,570	5,360			*7,840	*5,060	7.85 m
	-5 ft lb					*31,724	24,273	*24,890	15,939	*18,894	11,817			*17,284	*11,155	25.75 ft
	-3.0 m kg					*11,380	11,200	*8,970	7,350					*6,980	*6,050	6.96 m
	-10 ft lb					*25,089	24,692	*19,775	16,204					*15,388	*13,338	22.83 ft
Boom : 6.2 m, 20'34" 2-piece Arm : 3.05 m, 10'0" Shoe : 600 mm, 24" CWT : 6,200 kg, 13,670 lb	9.0 m kg					*9,760	*9,760							*7,380	*7,380	5.83 m
	30 ft lb					*21,517	*21,517							*16,270	*16,270	19.13 ft
	7.5 m kg					*9,190	*9,190	*9,400	9,010					*6,550	*6,420	7.29 m
	25 ft lb					*20,260	*20,260	*20,723	19,864					*14,440	*14,154	23.92 ft
	6.0 m kg					*9,740	*9,740	*9,760	8,830	*8,750	6,120			*6,230	*5,200	8.22 m
	20 ft lb					*21,473	*21,473	*21,517	19,467	*19,290	13,492			*13,735	*11,464	26.97 ft
	4.5 m kg					*13,400	13,190	*10,620	8,430	*9,060	5,950			*6,180	*4,560	8.80 m
	15 ft lb					*29,542	29,079	*23,413	18,585	*19,974	13,117			*13,625	*10,053	28.87 ft
	3.0 m kg					*15,680	12,070	*11,640	7,940	8,990	5,720	6,760	4,310	*6,340	*4,240	9.10 m
	10 ft lb					*34,568	26,610	*25,662	17,505	19,820	12,610	14,903	9,502	*13,977	*9,348	29.86 ft
	1.5 m kg					*16,940	11,220	12,280	7,500	8,740	5,490	6,660	4,210	*6,510	*4,120	9.13 m
	5 ft lb					*37,346	24,736	27,073	16,535	19,268	12,103	14,683	9,281	*14,352	*9,083	29.95 ft
	0 m kg					*16,640	10,860	11,960	7,220	8,560	5,330			*6,680	*4,210	8.92 m
	0 ft lb					*36,685	23,942	26,367	15,917	18,872	11,751			*14,727	*9,281	29.27 ft
	-1.5 m kg			*11,010	*11,010	*15,150	10,800	*11,650	7,120	8,490	5,270			*7,230	*4,540	8.43 m
	-5 ft lb			*24,273	*24,273	*33,400	23,810	*25,684	15,697	18,717	11,618			*15,939	*10,009	27.66 ft
	-3.0 m kg					*12,550	10,950	*9,820	7,190	*6,990	5,370			*6,700	*5,280	7.61 m
	-10 ft lb					*27,668	24,141	*21,649	15,851	*15,410	11,839			*14,771	*11,640	24.97 ft
Boom : 6.2 m, 20'34" 2-piece Arm : 3.7 m, 12'2" Shoe : 600 mm, 24" CWT : 6,200 kg, 13,670 lb	10.5 m kg					*7,390	*7,390							*6,910	*6,910	4.67 m
	35 ft lb					*16,292	*16,292							*15,234	*15,234	15.32 ft
	9 m kg							*7,200	*7,200					*5,520	*5,520	6.76 m
	30 ft lb							*15,873	*15,873					*12,170	*12,170	22.18 ft
	7.5 m kg							*7,460	*7,460	*6,650	6,220			*4,990	*4,990	8.05 m
	25 ft lb							*16,446	*16,446	*14,661	13,713			*11,001	*11,001	26.41 ft
	6.0 m kg					*7,060	*7,060	*7,820	*7,820	*7,700	6,170			*4,770	*4,540	8.90 m
	20 ft lb					*15,565	*15,565	*17,240	*17,240	*16,976	13,603			*10,516	*10,009	29.20 ft
	4.5 m kg			*10,040	*10,040	*9,870	*9,870	*9,580	8,550	*8,520	5,990	*6,700	4,400	*4,730	*4,030	9.44 m
	15 ft lb			*22,134	*22,134	*21,760	*21,760	*21,120	18,850	*18,783	13,206	*14,771	9,700	*10,428	*8,885	30.97 ft
	3.0 m kg					*14,670	12,500	*11,050	8,070	9,030	5,740	6,750	4,290	*4,850	*3,770	9.71 m
	10 ft lb					*32,342	27,558	*24,361	17,791	19,908	12,655	14,881	9,458	*10,692	*8,311	31.86 ft
	1.5 m kg					*16,560	11,560	*12,030	7,610	8,760	5,500	6,610	4,170	*5,110	*3,670	9.75 m
	5 ft lb					*36,509	25,485	*26,522	16,777	19,312	12,125	14,573	9,193	*11,266	*8,091	31.99 ft
	0 m kg			*5,950	*5,950	*16,980	11,040	12,040	7,280	8,540	5,300	6,510	4,070	*5,570	*3,740	9.55 m
	0 ft lb			*13,117	*13,117	*37,434	24,339	26,544	16,050	18,827	11,684	14,352	8,973	*12,280	*8,245	31.33 ft
	-1.5 m kg			*10,200	*10,200	*16,080	10,860	11,840	7,110	8,420	5,200	6,470	4,040	*6,330	*3,990	9.09 m
	-5 ft lb			*22,487	*22,487	*35,450	23,942	26,103	15,675	18,563	11,464	14,264	8,907	*13,955	*8,796	29.82 ft
	-3.0 m kg			*15,880	*15,880	*14,010	10,900	*10,720	7,100	*8,110	5,210			*6,470	*4,530	8.34 m
	-10 ft lb			*35,009	*35,009	*30,887	24,030	*23,634	15,653	*17,879	11,486			*14,264	*9,987	27.36 ft
	-4.5 m kg					*10,510	*10,510	*7,980	7,260							7.20 m
	-15 ft lb					*23,171	*23,171	*17,593	16,006							23.62 ft

Notes: 1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities. 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards. 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.

LIFTING CAPACITY EC300ELR

Lifting capacity at the arm end without bucket.

For lifting capacity including bucket, simply subtract actual weight of the direct fit bucket or the bucket with quick coupler from the following values.

		0 m, 0 ft		1.5 m, 5 ft		3.0 m, 10 ft		4.5 m, 15 ft		6.0 m, 20 ft		7.5 m, 25 ft					
		Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC				
Boom : 10.2 m LR, 33'6" Arm : 7.9 m LR, 25'9" Shoe : 800 mm, 32" CWT : 6,900 kg, 15,210 lb	3.0 m	kg					*4,200	*4,200					*5,290	*5,290			
	10 ft	lb					*10,510	*10,510					*11,440	*11,440			
	1.5 m	kg							*5,640	*5,640	*7,990	7,430	*6,160	5,510			
	5 ft	lb							*13,270	*13,270	*17,240	16,080	*13,330	11,910			
	0 m	kg					*1,810	*1,810	*3,990	*3,990	*9,090	6,640	*6,920	4,990			
	0 ft	lb					*4,110	*4,110	*9,140	*9,140	*19,650	14,350	*14,980	10,780			
	-1.5 m	kg			*1,780	*1,780	*2,370	*2,370	*3,940	*3,940	*7,280	6,140	*7,500	4,610			
	-5 ft	lb			*3,960	*3,960	*5,320	*5,320	*8,930	*8,930	*16,750	13,250	*16,240	9,950			
	-3 m	kg	*2,440	*2,440	*2,460	*2,460	*3,030	*3,030	*4,360	*4,360	*7,040	5,870	*7,680	4,360			
	-10 ft	lb	*5,430	*5,430	*5,480	*5,480	*6,800	*6,800	*9,850	*9,850	*16,070	12,650	*16,540	9,410			
	-4.5 m	kg	*2,990	*2,990	*3,150	*3,150	*3,760	*3,760	*5,010	*5,010	*7,440	5,750	*7,530	4,230			
	-15 ft	lb	*6,660	*6,660	*7,040	*7,040	*8,430	*8,430	*11,320	*11,320	*16,950	12,400	*16,220	9,130			
	-6 m	kg	*3,600	*3,600	*3,880	*3,880	*4,550	*4,550	*5,840	*5,840	*8,240	5,750	*7,480	4,190			
	-20 ft	lb	*8,040	*8,040	*8,690	*8,690	*10,230	*10,230	*13,190	*13,190	*18,800	12,400	*16,120	9,040			
	-7.5 m	kg	*4,270	*4,270	*4,660	*4,660	*5,440	*5,440	*6,840	*6,840	*9,410	5,840	*7,520	4,220			
	-25 ft	lb	*9,540	*9,540	*10,450	*10,450	*12,230	*12,230	*15,470	*15,470	*21,310	12,590	*16,210	9,120			
	-9 m	kg	*4,990	*4,990	*5,510	*5,510	*6,440	*6,440	*8,050	*8,050	*9,240	6,000	*7,450	4,330			
	-30 ft	lb	*11,160	*11,160	*12,370	*12,370	*14,510	*14,510	*18,270	*18,270	*19,930	12,970	*16,050	9,360			
	-10.5 m	kg			*6,450	*6,450	*7,600	*7,600	*9,580	*9,580	*8,310	6,250	*6,750	4,510			
	-35 ft	lb			*14,500	*14,500	*17,180	*17,180	*21,860	21,130	*17,780	13,540	*14,430	9,780			
	-12 m	kg					*8,980	*8,980	*8,680	*8,680	*6,900	6,620	*5,620	4,790			
	-40 ft	lb					*20,380	*20,380	*18,250	*18,250	*14,520	14,370	*11,780	10,430			
	-13.5 m	kg									*4,690	*4,690					
	-45 ft	lb									*10,340	*10,340					
		9.0 m, 30 ft		10.5 m, 35 ft		12.0 m, 40 ft		13.5 m, 45 ft		15.0 m, 50 ft		16.5 m, 55 ft		Max. reach			
		Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Along UC	Across UC	Max	
Boom : 10.2 m LR, 33'6" Arm : 7.9 m LR, 25'9" Shoe : 800 mm, 32" CWT : 6,900 kg, 15,210 lb	13.5 m	kg												*1,330	*1,330	12.94 m	
	45 ft	lb												*2,970	*2,970	41.79 ft	
	12.0 m	kg							*1,870	*1,870				*1,260	*1,260	14.14 m	
	40 ft	lb							*3,470	*3,470				*2,790	*2,790	45.93 ft	
	10.5 m	kg							*2,460	*2,460	*1,330	*1,330		*1,210	*1,210	15.10 m	
	35 ft	lb							*5,080	*5,080				*2,680	*2,680	49.21 ft	
	9.0 m	kg							*2,700	*2,700	*2,060	*2,060		*1,190	*1,190	15.85 m	
	30 ft	lb							*5,940	*5,940	*3,990	*3,990		*2,630	*2,630	51.80 ft	
	7.5 m	kg							*2,800	2,740	*2,530	2,170		*1,180	*1,180	16.44 m	
	25 ft	lb							*6,140	5,860	*5,160	4,630		*2,610	*2,610	53.80 ft	
	6.0 m	kg					*3,060	*3,060	*2,950	2,630	*2,870	2,110	*1,690	1,680	*1,190	*1,190	16.87 m
	20 ft	lb					*6,680	*6,680	*6,450	5,640	*6,050	4,500	*2,900	*2,900	*2,630	*2,630	55.27 ft
	4.5 m	kg			*3,570	*3,570	*3,320	3,120	*3,130	2,510	*2,990	2,020	*2,080	1,630	*1,220	*1,220	17.16 m
	15 ft	lb			*7,770	*7,770	*7,240	6,720	*6,840	5,380	*6,550	4,330	*3,880	3,460	*2,680	*2,680	56.25 ft
	3.0 m	kg	*4,500	*4,500	*3,980	3,660	*3,610	2,930	*3,340	2,370	*3,140	1,930	*2,360	1,570	*1,260	*1,260	17.31 m
	10 ft	lb	*9,760	*9,760	*8,640	7,900	*7,850	6,310	*7,280	5,090	*6,860	4,130	*4,500	3,340	*2,770	*2,770	56.77 ft
	1.5 m	kg	*5,090	4,260	*4,390	3,390	*3,900	2,740	*3,550	2,240	*3,120	1,830	*2,530	1,510	*1,320	*1,320	17.33 m
	5 ft	lb	*11,020	9,210	*9,520	7,300	*8,490	5,890	*7,740	4,800	*6,700	3,930	*4,830	3,220	*2,900	*2,900	56.85 ft
	0 m	kg	*5,620	3,910	*4,770	3,140	*4,180	2,560	*3,570	2,110	*3,020	1,750	*2,560	1,450	*1,390	1,330	17.21 m
	0 ft	lb	*12,180	8,440	*10,350	6,770	*9,090	5,510	*7,690	4,530	*6,500	3,740	*4,790	3,100	*3,080	2,930	56.48 ft
	-1.5 m	kg	*6,060	3,630	*4,970	2,930	*4,110	2,410	*3,450	2,000	*2,940	1,670	*2,370	1,400	*1,500	1,330	16.97 m
	-5 ft	lb	*13,130	7,830	*10,720	6,320	*8,850	5,180	*7,440	4,290	*6,330	3,580	*4,180	3,010	*3,310	2,940	55.66 ft
	-3 m	kg	*5,950	3,430	*4,800	2,780	*3,980	2,290	*3,370	1,910	*2,880	1,610	*1,810	1,380	*1,630	1,370	16.58 m
	-10 ft	lb	*12,820	7,390	*10,360	5,980	*8,590	4,930	*7,250	4,110	*6,210	3,470			*3,620	3,020	54.36 ft
	-4.5 m	kg	*5,820	3,310	*4,700	2,680	*3,900	2,210	*3,310	1,860	*2,850	1,580			*1,820	1,430	16.05 m
	-15 ft	lb	*12,540	7,130	*10,130	5,770	*8,410	4,770	*7,140	4,000	*6,160	3,410			*4,030	3,170	52.55 ft
	-6 m	kg	*5,760	3,250	*4,650	2,630	*3,870	2,180	*3,290	1,840	*2,860	1,590			*2,070	1,540	15.34 m
	-20 ft	lb	*12,420	7,020	*10,020	5,670	*8,340	4,700	*7,110	3,980	*4,920	3,450			*4,610	3,430	50.17 ft
	-7.5 m	kg	*5,770	3,270	*4,650	2,640	*3,880	2,190	*3,320	1,870					*2,440	1,720	14.45 m
	-25 ft	lb	*12,460	7,060	*10,050	5,700	*8,380	4,740	*7,190	4,050					*5,470	3,830	47.14 ft
	-9 m	kg	*5,850	3,340	*4,720	2,700	*3,950	2,260							*3,020	1,990	13.33 m
	-30 ft	lb	*12,650	7,240	*10,220	5,850	*8,560	4,910							*6,820	4,470	43.32 ft
	-10.5 m	kg	*5,580	3,490	*4,640	2,840									*3,800	2,430	11.91 m
	-35 ft	lb	*11,910	7,580	*9,820	6,180									*8,400	5,520	38.47 ft
	-12 m	kg	*4,560	3,740											*3,840	3,250	10.07 m
	-40 ft	lb	*9,450	8,170											*8,460	7,510	32.12 ft
	-13.5 m	kg													*3,650	*3,650	7.50 m
	-45 ft	lb													*8,047	*8,047	24.61 ft

Notes: 1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities. 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards. 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.

Equipment

STANDARD EQUIPMENT

Engine

Turbocharged, 4 stroke diesel engine with water cooling, direct injection and charged air cooler that meets EU Stage V requirements
Air filter with indicator
Air intake heater
Cyclone precleaner
Electric engine shutoff
Fuel filter and water separator
Delayed engine shutdown
Alternator, 80 A

Electric / Electronic control system

Advanced mode control system
Selfdiagnostic system
Machine status indication
Engine speed sensing power control
Automatic idling system
Onetouch power boost
Safety stop/start function
Adjustable LCD color monitor
Master electrical disconnect switch
Engine restart prevention circuit
Highcapacity halogen lights:
- Frame-mounted 2
- Boom-mounted 1
Extra work lights(Halogen) :
Cab-mounted 3
Boom-mounted 1
Batteries, 2 x 12 V / 170 A
Start motor, 24 V / 5.5 kW
Travel alarm

Frame

Access way with handrail
Tool storage area
Punched metal antislip plates
Counterweight:
13,670 lb
15,210 lb Long Reach

Undercarriage

Undercover (heavyduty)
Hydraulic track adjusters
Greased and sealed track link
Track Guard

Hydraulic system

Boom up swing priority function
Boom travel priority function (Creep)
Boom down speed control
Attachment management system (up to 32 programmable memories)
- Variable flow and pressure pre-setting
Hammer & shear, 2 pump flow
Additional return filter (Hammer & shear piping)
Boom float function without HRV
Straight travel pedal
Automatic sensing hydraulic system
Summation system
Boom priority
Arm priority
Swing priority
ECO mode fuel saving technology
Boom, arm and bucket regeneration valves
Swing antirebound valves
Boom and arm holding valves
Multistage filtering system
Cylinder cushioning
Cylinder contamination seals
Auxiliary hydraulic valve
Automatic twospeed travel motors
Hydraulic oil, ISO VG 46
Quick coupler piping

STANDARD EQUIPMENT

Cab and interior

ROPS (ISO121172) certified cab
Opening top hatch
Silicon oil and rubber mounts with spring
Travel pedals and hand levers
Adjustable operator seat and joystick control console
Heater & airconditioner, automatic
Flexible antenna
Radio with MP3 & USB Jack with bluetooth
Hydraulic safety lock lever
Cab, allweather sound suppressed, includes:
Cup holders
Door locks
Tinted glass
Floor mat
Horn
Large storage area
Pullup type front window
Removable lower windshield
Seat belt
Safety glass
Sun screens, front, roof, rear
Rain shield
Windshield wiper with intermittent feature
Volvo smart view
Master key

Track shoes

32" with triple grousers

Digging equipment

Linkage with lifting eye
Boom: 20'4" monoblock
Arm: 10'0"
Boom: 33'6" monoblock, Long Reach
Arm: 25'11", Long Reach
Manual centralized lubrication

Machine controls

Dig Assist
Volvo Active Control (Semi-autonomous)

OPTIONAL EQUIPMENT

Engine

Block heater: 120 V, 240 V
Oil bath pre-cleaner
Diesel coolant heater, 10 kW
Water separator with heater
Auto engine shutdown
Reversible fan
Fuel filler pump: 13.2 gpm, with automatic shutoff

Electric

Extra work lights(LED):
Cab-mounted 3
Boom-mounted 1
Counterweight-mounted 1
Green light beacon
Anti-theft system
Rotating warning beacon
Smart connect for tilt rotator
Tilt rotator 3rd gen
Dig assist, smart connect
On Board Weighing (OBW)

Undercarriage

Full track guard
Track shoes
24/28/36" with triple grousers
24" HD with triple grousers
24/28" with double grousers

OPTIONAL EQUIPMENT

High walker undercarriage

Hydraulic system

CDC, Comfort Driving Control

Hose rupture valve: boom & arm

Overload warning device

Boom float function with HRV

Hydraulic piping:

- Slope & rotator

- Grapple

- Oil leak (drain) line

Volvo hydraulic quick coupler S2

Volvo hydraulic quick coupler U30 / U35

Volvo hydraulic quick coupler SQ70 55

Volvo hydraulic quick coupler SQ70

Hydraulic oil, biodegradable 46

Hydraulic oil, longlife oil 32

Hydraulic oil, longlife oil 46

Fuel tank-fast fuel fill prep

Hammer & shear, 1 pump flow

Cab and interior

High visibility cabin

Fabric seat with heater

Fabric seat with heater and air suspension

Deluxe seat

High-strength one piece front windshield (P5A)

Falling object guard, FOG (fixed type or hinge type)

Frame-mounted

Cab-mounted

Cab-mounted falling object protective structure (FOPS)

Side view camera

Smoker kit (ashtray and lighter)

Safety net for front window

Lower wiper with intermittent control

Anti-vandalism kit

Air pressure supply in cabin

Rear view camera

Control joysticks with 4 switches

OPTIONAL EQUIPMENT

Proportional joysticks with 3 switches

Digging equipment

Arm: 8'4" HD, 10'0", HD, 12'2"

Arm: 25'11", long reach

Service

Tool kit, daily maintenance

Tool kit, full scale

Other

Hybrid: Please refer to separate Brochure for more details

SELECTION OF VOLVO OPTIONAL EQUIPMENT

Deluxe seat



Hybrid



Reversible cooling fan



TiltRotator



Oil drain line



High-visibility cab



Not all products are available in all markets. Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.



VOLVO

Volvo Construction Equipment
volvoce.com

VOLVO

Volvo Construction Equipment North America Warranty – Disclaimers – Limitations Limited Warranty for Governmental / Municipalities

Volvo Construction Equipment North America ("Volvo CE") hereby extends to its authorized dealers ("Dealer") and the Dealer's Governmental / Municipalities customers ("Customer", and both Dealer and Customer are referred to herein as a "Buyer"), who purchase a new Volvo construction equipment machine ("Machine") or new Volvo part ("Part", both of which are referred to herein as a "Product") from Volvo, the following limited warranty:

Subject to the exceptions and limitations set forth below, Volvo CE or Dealer will repair or replace any part of a new Machine or new Part which proves to be defective in material or workmanship during the following periods (the "Warranty Period"):

- Volvo wheel loaders: 12 months/2500 hours, whichever first occurs
- Volvo articulated haulers: 12 months/2500 hours, whichever first occurs
- Volvo hydraulic excavators: 12 months/2500 hours, whichever first occurs
- Volvo motor graders: 12 months/2500 hours, whichever first occurs
- Volvo compactors: 12 months/1500 hours, whichever first occurs
 - 24 months unlimited hours on DD90 and larger compactors
- Volvo pavers: 12 months/1500 hours, whichever first occurs
 - 24 months unlimited hours on 6000 / 7000 series pavers
- Volvo milling: 12 months/1500 hours, whichever first occurs
- Volvo compact wheel loaders (up to 100 net hp.): 12 months/unlimited hours
- Volvo skid steer loaders: 12 months/unlimited hours; Lifetime arm for one-sided
- Volvo compact hydraulic excavators (less than 11 metric tons): 12 months/unlimited hours
- Volvo backhoe loaders: 12 months/unlimited hours
- Volvo engines: 12 months/2500 hours, whichever first occurs
- Volvo parts: 6 months/1500 hours, whichever first occurs
- Volvo remanufactured components: 12 months/2500 hours, whichever first occurs
- Volvo Attachments: 12 months

The Warranty Period commences immediately following the delivery of said Product to the Buyer who first puts said Product into use. The foregoing limited warranty shall include the labor cost to accomplish the repair or replacement of the defective part provided that the repair or replacement was performed by a Dealer.

The foregoing warranty does not cover: (i) any Product found to have been damaged by abuse, accident, other casualty or a failure to maintain or use the warranted Product in accordance with the applicable manuals or instructions (Buyer is required to use only original equipment manufacturer filters during the Warranty Period); (ii) the labor costs to repair or replace defective Parts after the expiration of the Warranty Period of the Machine in which such Part is located; (iii) overtime labor premiums; (iv) costs and expenses associated with the transportation of Dealer's service personnel to and from the location of the warranted Product; (v) any parts, components, attachments or accessories for which Buyer receives a separate warranty by the manufacturer or producer thereof (in specified cases said warranty may be administered by Volvo CE); (vi) maintenance items or ground engaging parts that have achieved their normal service life.

DISCLAIMER OF IMPLIED WARRANTIES AND LIMITATION OF REMEDIES

THE FOREGOING WARRANTY TO BUYER IS EXCLUSIVE AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, AND THERE IS NO IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

REMEDIES AVAILABLE TO BUYER ARE LIMITED TO MAKING A CLAIM UNDER THE FOREGOING WARRANTY AND ARE EXCLUSIVE AND EXPRESSLY LIMITED TO OBTAINING THE PARTS AND LABOR IN ACCORDANCE WITH THE TERMS OF SAID WARRANTY.

Warranty – Disclaimers – Limitations

LIMITATIONS OF LIABILITY AND DAMAGES

Regardless of whether a claim against Volvo CE or Dealer is based on the foregoing warranty or is an action in contract, tort (negligence or strict liability) or otherwise, their respective liability for losses, damages or expenses of any kind arising from the design, manufacture, repair or sale of the Products is limited, unless otherwise prohibited by law, to an amount not exceeding the cost performing the obligations contained in the foregoing warranty, and in no event shall their respective or joint liability exceed the value of the Product or part thereof giving rise to such liability.

CONSEQUENTIAL AND SIMILAR DAMAGES NOT RECOVERABLE

Except for performing the obligations of the foregoing warranty in accordance with its terms, Volvo CE and Dealer shall have no liability for loss, damage, or expense, directly or indirectly, attributable to a loss of use of a Product, loss or damage to property other than the Product, loss or damage to the Product or any part thereof or any other economic or commercial loss, including, without limitation, lost profits or special or consequential damages (except liability for any type of consequential damages which by law may not be disclaimed). The parties intend that this prohibition against consequential and similar damages will survive and be effective even if the limitation of remedies in the foregoing sections is found to fail of its essential purpose under section 2-719 of the Uniform Commercial Code.

ALLOCATION OF RISK

The foregoing warranty disclaimers, limitations of liability and limitation of remedies are bargained allocations of risks among (i) the Customer who purchased the Product; (ii) the Dealer who sold the Product, and (iii) Volvo CE, which is a third party beneficiary of the contract of sale between the Customer and the Dealer. The Buyer of the Product accepts the foregoing warranty and the other bargained for allocations of risk as part of the agreed price for the purchase of the Product to which the foregoing warranty applies. Volvo CE is prepared to offer different warranties and other allocations of risk for other prices. However, any such change in the warranty or the allocation of risks must be confirmed in writing by Volvo CE.

STATUTE OF LIMITATIONS

Any action by a Buyer of a Product for breach of contract, for breach of warranty arising under, or for a cause of action arising out of the sale of a Product, whether based on contract, tort (negligence or strict liability) or otherwise, shall be commenced within one (1) year after the cause of action has accrued. Any such cause of action shall be deemed to have accrued at the earlier of (i) the discovery of the defect or breach, or (ii) the expiration of the applicable Warranty Period.

Company ID Number: 475502

**E-VERIFY
CORPORATE COMPANY**

**If you have any questions, contact E-Verify at
888-464-4218.**

**INFORMATION REQUIRED
FOR E-VERIFY**

Information relating to your Company:

Company Name: Cowin Equipment Company Inc

Company Facility Address: 2238 Pinson Valley Parkway
Birmingham, AL 35217

County or Parish: JEFFERSON

Information relating to the Corporate Administrator(s) for your Company on policy questions or operational problems:

Name:	George Tickle	Fax Number:	(205) 841 - 2639
Telephone Number:	(205) 488 - 3950		
E-mail Address:	gtickle@cowin.com		
Name:	Tracy Womack	Fax Number:	(205) 488 - 3164
Telephone Number:	(205) 488 - 3959		
E-mail Address:	twomack@cowin.com		

Company ID Number: 505216

THE E-VERIFY PROGRAM FOR EMPLOYMENT VERIFICATION MEMORANDUM OF UNDERSTANDING

ARTICLE I

PURPOSE AND AUTHORITY

This Memorandum of Understanding (MOU) sets forth the points of agreement between the Department of Homeland Security (DHS) and Cowin Equipment Co Inc (Employer) regarding the Employer's participation in the Employment Eligibility Verification Program (E-Verify). This MOU explains certain features of the E-Verify program and enumerates specific responsibilities of DHS, the Social Security Administration (SSA), and the Employer. E-Verify is a program that electronically confirms an employee's eligibility to work in the United States after completion of the Employment Eligibility Verification Form (Form I-9). For covered government contractors, E-Verify is used to verify the employment eligibility of all newly hired employees and all existing employees assigned to Federal contracts or to verify the entire workforce if the contractor so chooses.

Authority for the E-Verify program is found in Title IV, Subtitle A, of the Illegal Immigration Reform and Immigrant Responsibility Act of 1996 (IIRIRA), Pub. L. 104-208, 110 Stat. 3009, as amended (8 U.S.C. § 1324a note). Authority for use of the E-Verify program by Federal contractors and subcontractors covered by the terms of Subpart 22.18, "Employment Eligibility Verification", of the Federal Acquisition Regulation (FAR) (hereinafter referred to in this MOU as a "Federal contractor with the FAR E-Verify clause") to verify the employment eligibility of certain employees working on Federal contracts is also found in Subpart 22.18 and in Executive Order 12989, as amended.

ARTICLE II

FUNCTIONS TO BE PERFORMED

A. RESPONSIBILITIES OF SSA

1. SSA agrees to provide the Employer with available information that allows the Employer to confirm the accuracy of Social Security Numbers provided by all employees verified under this MOU and the employment authorization of U.S. citizens.
2. SSA agrees to provide to the Employer appropriate assistance with operational problems that may arise during the Employer's participation in the E-Verify program. SSA agrees to provide the Employer with names, titles, addresses, and telephone numbers of SSA representatives to be contacted during the E-Verify process.
3. SSA agrees to safeguard the information provided by the Employer through the E-Verify program procedures, and to limit access to such information, as is appropriate by law, to individuals responsible for the verification of Social Security Numbers and for evaluation of the E-Verify program or such other persons or entities who may be authorized by SSA as governed



Company ID Number: 505216

To be accepted as a participant in E-Verify, you should only sign the Employer's Section of the signature page. If you have any questions, contact E-Verify at 888-464-4218.

Employer Cowin Equipment Co Inc	
Tracy Womack	
Name (Please Type or Print)	Title
Electronically Signed	02/15/2012
Signature	Date

Department of Homeland Security – Verification Division

USCIS Verification Division

Name (Please Type or Print)		Title
Electronically Signed		02/15/2012
Signature		Date

Information Required for the E-Verify Program

Information relating to your Company:

Company Name:	Cowin Equipment Co Inc
Company Facility Address:	2238 Pinson Valley Parkway
	Birmingham, AL 35217
Company Alternate Address:	PO Box 10624
	Birmingham, AL 35202
County or Parish:	JEFFERSON
Employer Identification Number:	630141942