

BID SUBMITTAL FORM
Alabama County Joint Bidding Program
BID ITEM – LOWBOY TRACTOR OPTION B

Company Name: KENWORTH OF BIRMINGHAM(TRUCKWORX)

Address: 2220 FINLEY BLVD; BIRMINGHAM, AL 35234

Bid Submitted by: JAY CALLAWAY
 (Name of company representative)

Title: VP OF GOVERNMENT AFFAIRS E-mail address: JONATHANC@TRUCKWORX
601.702.1923 (CELL) 601.420.4476 OFFICE CC: MARTHAC@TRUCKWORX.COM
 Phone: _____ Fax: 205.909.4173

By submitting this bid, we agree:

- | | Initials |
|--|-----------|
| That the equipment model number identified below meets the bid specs for this bid item | <u>JC</u> |
| That the bid price will be honored for all counties for the period from Jan. 1, 2023 to Dec. 31, 2023; however, the deadline to submit orders for calendar year 2023 will be March 15, 2023. | <u>JC</u> |
| That the equipment will be delivered at the bid price to all counties participating in the joint bid program <u>SEE ATTACHED ADDENDUM A; AT THE BOTTOM OF PAGE 1.</u> | <u>JC</u> |
| That the company representative listed above will be the contact person for purchasing this bid item under the joint bid program | <u>JC</u> |
| That the bid is accompanied by a current catalog or model specification document for the model number identified below | <u>JC</u> |
| That the bid is accompanied by a copy of the manufacturer's standard warranty as required in the bid specifications | <u>JC</u> |
| That the bid includes the e-verify documentation required by Alabama law | <u>JC</u> |
| That, if awarded the bid, a performance bond will be provided upon request | <u>JC</u> |
| That an option sheet with individual pricing is attached | <u>JC</u> |

Total Bid Price including options: \$ 208,500.00

Equipment Model #: T880; T880S KENWORTH

Description: LOWBOY TRACTOR

Signature of company representative submitting bid: _____

Title: VP OF GOVERNMENT AFFAIRS

Addendum A:

Due to OEM production constraints ACCA members will be limited to 71 slots on this year's contract. Order(s) will be recieved on a first come, first serve basis until all production slots are fulfilled.


**OPTION COST SHEET FOR LOW BOY TRACTOR
OPTION B**

<u>Options</u>	<u>Option Price</u>
Dual purpose wet line kit	\$ <u>5600.00</u>
Aluminum cab guard	\$ <u>1700</u>
60" Long Light bar	\$ <u>1700</u>
6-inch extended cab in place of standard cab	\$ <u>N/A</u>
MX 13L engine in place of w/ X15 15L engine	\$ <u>4500</u>
(18) Speed Manual Transmission with torque input capacity of 1850 Ft LBs in place of standard 18 Speed Automated Manual Transmission.	\$ <u>6,651</u>

NOTE: Award will be made on the basis of the total cost of the Low Boy Tractor with the option included. However, a county may, at its discretion, deduct the above-referenced option from the Low Boy Tractor, and in such event, the cost of the option as stated on the bid shall be deducted from the total cost of the Low Boy Tractor. There shall be no other deductions and no additions made to the Low Boy Tractor by the purchasing county or by the vendor.

Equipment Model #: T880, or T880S Kenworth

Description: Lowboy Tractor Option B

Signature of company representative submitting bid: 

Title: VP OF GOVERNMENT AFFAIRS

BID SPECIFICATIONS FOR HEAVY DUTY LOW BOY TRACTOR-OPTION B

GENERAL

These specifications shall be construed as the minimum acceptable standards for a heavy duty Low Boy tractor. Should the manufacturer's current published data or specifications exceed these standards, the manufacturer's standards shall be considered minimum and shall be furnished. All integral parts not specifically mentioned in the scope of these specifications that are necessary to provide a complete working unit shall be furnished. Additionally, the machine offered for bid shall include all standard manufacturers' equipment.

The use of specific names or numbers in the specifications is not intended to restrict the bidder or any seller or manufacturer, but is intended solely for the purpose of indicating the type, size, and quality of equipment considered best adapted to the uses of counties participating in this joint bid.

Note all units offered for bid must be of manufacturer's current production model and must be fully compliant with 2021 EPA standards without the use of EPA engine credits. Chassis should be equipped with the appropriate diesel particulate filter and SCR after treatment system.

BID SUBMITTAL FORM

Each bidder must submit his or her bid on the Bid Submittal Form included in the invitation to bid package. All written warranties to be submitted shall be attached to the Bid Submittal Form.

BID PRICE

The price bid shall include all destination charges, delivery charges, title fees, rebates and all other applicable costs and refunds.

REPLACEMENT PARTS AVAILABILITY

Parts must be available for 5 years or 500,000 miles of use for the piece of equipment bid.

ASSEMBLY AND DELIVERY

The selling Low Boy Tractor dealer shall be responsible for delivery of the completed unit to the purchasing county with all requested options.

DOT INSPECTION AND SAFETY EQUIPMENT

Prior to delivery each unit shall be DOT inspected and include the appropriate documentation and decal. In addition, each unit shall be equipped with the required fire extinguisher and reflective triangle kit.

WARRANTY

Bidders shall submit a copy of the manufacturer's standard warranty along with a complete explanation of the warranty with their bid. Warranty must be transferable. Warranty must include the following minimum coverage:

Basic Vehicle: 1 Year or 100,000 miles

Diesel Engine: 2 year or 250,000 miles. However, counties will have the option to purchase additional coverage (an extended warranty) if negotiated between the purchasing county and successful bidder within the first 9 months of truck purchase.

Transmission: 3 Year or 300,000 miles

Rear Carriers: 3 Year or 300,000 miles

Yes No
Page # _____
or
Attachment _____

ENGINE AND RELATED COMPONENTS

Shall be an in line 6 design 15 liter minimum, turbo charged diesel engine capable of developing 500HP minimum with a governed engine speed of 1800RPM or more. Torque rating to be a minimum of 1,850FT Lbs.

Yes No
Page # 2

Engine shall have full wet replaceable cylinder liners. Fuel injection system to be equipped with a unit pump or unit injector style with CARB idle reduction.

Yes No
Page # 2

Air intake system shall have a minimum of 1 filter elements in with a restriction indicator. Air cleaner element/elements mounted either under or outside of the hood.

Yes No
Page # 3

Engine cooling system to have a minimum 1,240 square inches of frontal area, aluminum core radiator with silicone hoses throughout and coolant protection to -34 degrees F.

Yes No
Page # 3

Fan drive to be Horton two speed type

Yes No
Page # 3

Exhaust to be DUAL vertical with turnouts. Heat shields and stacks to be bright finish.

Yes No
Page # 3

Diesel Particulate Filter and SCR catalyst to be mounted under passenger door with aluminum cover.

Yes No
Page # 3

Factory installed integral Engine Brake.

Yes No
Page # 2

STARTING AND ELECTRICAL SYSTEM

12-Volt system fuse/circuit breaker protected

Yes No
Page # 10

12V gear reduction starter, 12V 160 amp alternator

Yes No
Page # 3

Unit should be equipped with a backup alarm

Yes No
Page # 10

(3) 12V maintenance free group 31 batteries with 700 cold cranking amps each. Batteries to be mounted in a single steel box with polished aluminum cover LH side under cab.

Yes No
Page # 3

TRANSMISSION AND DRIVELINE

An automated manual eighteen (18) speed overdrive design, with over all gear ratio coverage of 19.73 and a minimum first gear reduction of 14.4 to 1 and a torque input capacity of 1850 FT#.

Yes No
Page # 4

Transmission should have oil cooler with dash mounted temperature gauge, left and right-side PTO access gears with appropriate clearance.

Yes No
Page # 4

Main drivelines Spicer 1810HD or Equivalent with coated splines/ inter axle 1810 with coated splines.

Yes No
Page # 4

CAB EXTERIOR

Cab to be Class 8 design for construction and vocational applications. **Aluminum** and composite construction for corrosion resistance. Huck bolted or Hen rob fastened construction. Minimum width 1.9 meters.

Yes No
Page # 7

Drop style side windows for improved driver's downward visibility.

Yes No
Page # 10

~~Stainless steel piano type door hinges.~~ No automotive type hinges allowed.

Yes No
Page # 7

Rear of engine may not extend into cab. No doghouse in firewall is allowed.

Yes No
Page # 7

Both doors should have power windows and power mirrors.

Yes No
Page # 9

One piece curved windshield. No bonded in windshield allowed.

Yes No
Page # 9

Cab mounting should be air suspended at rear on at least 1 air bags.

Yes No
Page # 10

Cab should feature:

Dual air horns in addition to the standard electric signal horn

Yes No
Page # 9 AND 10

LED marker lights

Yes No
Page # 10

Cab mounted heated mirrors with convex mirrors mounted directly below heated mirrors
Stainless Steel exterior sun visor

Yes No
Page # 9

Hood is to be a full tilting composite design.
Includes bright finished grill and grill surround.

Yes No
Page # 7

Cab and hood paint color to be selected from manufacturer's standard non-metallic paint chart.

Yes No
Page # 8

CAB INTERIOR

Cab interior to include the following:

Cab interior is to be Midgrade level fully groomed with
with headliner, back wall and door panels.

Yes No
Page #

AM/FM/WB and Bluetooth radio with clock and six gauges for engine oil
temperature, transmission oil temperature, turbo boost pressure,
air suspension pressure, & dual rear axle oil temperature.

Yes No
Page # 8

Cab should have interior sun visors on both sides of cab.

Yes No
Page # 8

Black appearance with chrome gauge surrounds

Yes No
Page # 9

Center mount console with cup holders

Yes No
Page # 9

Full adjusting tilt and telescopic steering column

Yes No
Page # 8

Multifunction Driver Display to include the following:

Yes No
Page # 8

Average and real time fuel economy

RPM display

Ignition timer

Trip information

Truck information

Onboard diagnostics

Gear display (automated manual only)

Cab seats should be:

Driver High Back air ride design with dual arm rests

Yes No
Page # 9

Passenger High Back air ride design with dual arm rests

Yes No
Page # 9

Both seats to have fabric and/or vinyl covering with required lap and shoulder belts.

Yes No
Page # 9

Factory installed integral heater/air conditioning (HVAC) with R134A refrigerant and rotary type air conditioner compressor. HVAC unit to be firewall mounted to allow for easier access to components.

Yes No
Page # 8

Two- way radio power leads with mounting plate installed in overhead console with dual mirror mounted antennas.

Yes No
Page # 9

One additional dash mounted power outlet to be furnished.

Yes No
Page # 9

Windshield wipers to be two (2) speed electric with washer and intermittent feature. Wiper motor and linkage to be mounted external of the cab on firewall for easier access.

Yes No
Page # 9

Power door locks.

Yes No
Page # 9

AIR BRAKES

Brake system to be full dual antilock Bendix with 6S/6M Road Stability System to include ABS/ATC/ESP with YAW control.

Yes No
Page # 5

Air compressor should have a minimum 18.7CFM capacity and Bendix heated air dryer with extended purge.

Yes No
Page # 3 & 10

FRAME/BUMPER/FUEL TANKS

Steel 120,000 PSI steel frame rails 10.6875" x 3.50" x 0.50" with a section modulus of 22.35 and a RBM per rail of 2,683,000.

Yes No
Page # 5

Minimum 205" wheelbase with a 134" cab to axle.

Yes No
Page # 1

Heavy-duty 3 piece cross members. Huck bolt fasteners Throughout where possible.

Yes No
Page # 6

Front bumper Bright Finish steel tapered with two removable tow pins.

Yes No

Page # 6

Dual fuel tank(s) to be aluminum with a minimum of 100-gallon capacity on RH side and 75-gallon capacity on LH side. 7" wide heavy duty fuel tank straps.

Yes No

Page # 7

Minimum 20.7-gallon capacity DEF tank mounted on LH side with polished cover

Yes No

Page # 7

Chassis to be equipped with frame mounted bright finish quarter fenders mounted ahead of front pull axle and rear mud flaps mounted at end of frame on heavy duty spring loaded brackets.

Yes No

Page # 7

FIFTH WHEEL

Tractor to be equipped with a Holland 24" air slide fifth wheel. Fifth wheel should have pinning feature for dump trailer use. Pins should be removable type for Multi-purpose use.

Yes No

Page # 6

FRONT AXLE

Dana Spicer E-1462W or Equivalent 14.6K axle with 16,000# multi leaf suspension and shock absorbers. Threaded spring hanger pins and bushings replacing rubber bushings. Wide track front axle for improved wheel cut.

Yes No

Page # 4

13,200# integral power steering.

Yes No

Page # 4

Minimum of 24.5" spring centers.

Yes No

Page # 4

Unitized sealed (maintenance free) front wheel hubs.

Yes No

Page # 4

Sealed tapered kingpins and bearings.

Yes No

Page # 4

Meritor "S" cam design (or equivalent) Federal Reduced Stopping Distance Compliant Brakes.

Yes No

Page # _____

Front wheels to be polished aluminum ten (10) hole bud style, hub piloted 24.5" x 8.25".

Yes No

Page # _____

Front tires to be 16 ply 11R24.5 radials Bridgestone, Goodyear, Yokohama, Michelin.

Yes No

Page # _____

Reference *Tire Clause* Due to the Global shortage different tires and sizes maybe substituted to complete the build.

REAR AXLE

Dual Meritor RT46-164PEH or Equivalent 46K tandem rear axle with heavy wall housing and integral lube pump (4.10 ratio). 46,000# air ride suspension with shock absorbers, torque and tracking rods, and dump valve.
In cab Power divider lock out valve with warning light and buzzer.

Yes X No ___
Page # 4 &5

Driver controlled inter wheel differential locks for both rear axles with manual valve and warning light.

Yes X No ___
Page # 5

Meritor "S" cam design (or equivalent) Federal Reduced Stopping Distance Compliant Brakes.

Yes X No ___
Page # 4

Brake chambers shall be (4) 30/30 Long Stroke for Federal Reduced Stopping Distance Compliant style chambers

Yes X No ___
Page # 5

Polished aluminum ten- (10) hole bud style, hub piloted 24.5 x 8.25 rear wheels.

Yes X No ___
Page # 5

Rear tires to be 14 ply 11R 24.5 traction radials Bridgestone, Goodyear, Yokohama, or Michelin.

Yes X No ___
Page # 5

OPTIONS

In addition the bid must also include the cost for each of the following options, itemized separately on the bid:

Dual-purpose wet line system for use with a dump trailer or a detachable neck low boy trailer. Yes No
Page # _____

Aluminum Cab Guard with window Yes No
Page # _____

60-Inch Long Light bar with Two Power Supplies and Eight Strobes (4 Front/4 Rear)
-Shall include built-in, rear facing stop/tail/turn signals and Rear Facing work Lights Yes No
Page # _____

-Light bar shall be mounted on the Aluminum Cab Guard with controls mounted inside the cab. Yes No
Page # _____

(18) Speed Manual Transmission with torque input capacity of 1850 Ft LBs in place of standard 18 Speed Automated Manual. Yes No
Page# _____

MX 13L engine in place of X15 15L engine Yes No
Page# _____

NOTE: Award will be made on the basis of the total cost of the Low Boy Tractor with all options included. However, a county may, at its discretion, deduct the above-referenced option from the Low Boy Tractor, and in such event, the cost of the option as stated on the bid shall be deducted from the total cost of the Low Boy Tractor. There shall be no other deductions and no additions made to the Low Boy Tractor by the purchasing county or by the vendor.



TRUCKWORX

Jay Callaway
 Truckworx – Jackson
 2220 Finley Blvd
 Birmingham, AL 35234
 Office: 601.939.5300
 Cell: 601.702.1923
 Email: jonathanc@truckworx.com
 www.TRUCKWORX.com

Attn: ACCA Administration

October 22 2022

Dear ACCA Valued customer:

Please be advised that production will be limited to 71 slots for next year's contract. The deadline to obtain calendar year 2023 build slots will be March 15, 2023. Due to OEM production constraints, build slot(s) will be limited to 71.

2024 T880 Kenworth Tractor Truck	
Engine X15	500 HP with 1850 torque
Transmission	18 Speed Automated
Front Axle Meritor or Dana	14k
Air Ride Rear Suspension	46,000
Wheelbase	216
Tires	11 R24.5
Ratio	4.30
Fan hub on/off or Two speed fan hub	2-speed fan hub
Cooling Module	1330 square inches
Air Compressor	25.9 or greater
Alternator	160 brush type

Color: White or Red

Total Price \$208,500.00

Includes all options

Two line wet-kit

Light Bar and Headache Rack


(71) Slots available for 2022



Thank you for your consideration of our proposal. Please feel free to contact me if you have any questions. I look forward to providing you with "The World's Best!" F.O.B destination.


 Jay Callaway
 Vice President of Government Affairs

TRUCKS MOVE



AMERICA





TRUCKWORX KENWORTH - BIRMINGHAM (K415)
 2220 FINLEY BOULEVARD
 BIRMINGHAM, Alabama 35234

MAS MML ALM ACCA FAC
 4321 MAIN STREET
 JACKSON, Mississippi 39073
 United States of America


Jonathan Callaway
 Cell Phone: 601-702-1923
 Office Phone: 601-939-5300
 Email: jonathanc@truckworx.com

Truck Buyer
 Email: truck@buyer.com

Vehicle Summary

	Unit	Chassis	
Model:	T880 Series Conventional	Fr Axle Load (lbs):	13200
Type:	TRACTOR	Rr Axle Load (lbs):	46000
Description 1:	MAS MML ALM ACCA FAC	G.C.W. (lbs):	100000
Description 2:	T880 X15 500 USP		
	Application	Road Conditions:	
Intended Serv.:	Local pickup & delivery: Vehicles which	Class A (Highway)	89
Commodity:	Heavy machinery.	Class B (Hwy/Mtn)	10
		Class C (Off-Hwy)	1
		Class D (Off-Road)	0
	Body	Maximum Grade:	6
Type:		Wheelbase (in):	216
Length (ft):	0	Overhang (in):	58
Height (ft):	0	Fr Axle to BOC (in):	74
Max Laden Weight (lbs):	0		
		Cab to Axle (in):	142
		Cab to EOF (in):	200
	Trailer	Overall Comb. Length (in):	816.5
No. of Trailer Axles:	2		
Type:	Lowboy		
Length (ft):	48	Special Req.	
Height (ft):	13.5	U.S. Domestic registry, 50-state.	
Kingpin Inset (in):	24		
Corner Radius (in):	0		
	Restrictions		
Length (ft):	120		
Width (in):	102		
Height (ft):	13.5		

Approved by:

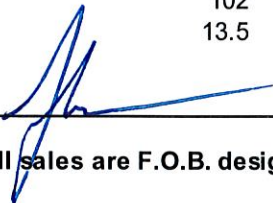

Date:

10/4/22

Note: All sales are F.O.B. designated plant of manufacture.



Sales Code	Std/Opt	Description	\$ List	Weight
Model				
0000810	S	T880 Series Conventional	213,378	15,549
0070060	S	T880	0	0
0072000	O	Chassis operation will not incl. stationary application. Stationary operation is defined as running the engine under load while stationary at a substantial fraction of engine gross horsepower (60% or greater) for an extended period of time (longer than 5 - 10 minutes).	0	0
0080075	O	Dealer/Customer declines engine w/CARB Idle Emissions Reduction Feature.	0	0
0090000	S	Non-Sleeper w/rear axle capacity less than 59K.	0	0
0098424	O	State of Registry: Mississippi	0	0
Engine & Equipment				
0130307	O	X15 500V 500@2000 1850@950 2021 with Intebrake, Productivity Series N09420 C333 0.....Reserve Speed Limit Offset (N09380 C334 0.....Maximum Cycle Distance (C334 N09360 C400 252...Reserve Speed Function Reset N09200 C399 120...Standard Maximum Speed Limit N09400 C401 10....Maximum Active Distance (C40 N09220 C402 0.....Expiration Distance (C402) N09540 C395 0.....Expiration Distance (C395) N09260 C121 75....Maximum Accelerator Pedal Ve N09440 C234 YES...Engine Protection Shutdown (N09460 C231 NO....Gear Down Protection (C231) N09580 C133 5.....Timer Setting (C133) N09680 C233 NO....Idle Shutdown Manual Overrul N09480 C132 1400..Max PTO Speed (C132) N09300 C128 75....Maximum Cruise Speed (C128) N09500 C239 NO....Cruise Control Auto Resume (N09520 C238 NO....Auto Engine Brake in Cruise N09240 C209 120...Hard Maximum Speed Limit (C2 N09780 C190 80....High Ambient Temperature Thr N09740 C188 40....Low Ambient Temperature Thre N09760 C189 60....Intermediate Ambient Tempera N09720 C382 YES...Enable Hot Ambient Automatic N09600 C396 YES...Enable Impending Shutdown Wa N09620 C397 60....Timer For Impending Shutdown N09640 C206 35....Engine Load Threshold (C206) N09560 C225 YES...Enable Idle Shutdown Park Br	7,709	465
1000046	O	EPA Emissions Warranty Engine	0	0
1000151	S	PremierSpec	0	0

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891233-Q4Y7Y9

Printed On: 8/9/2022 6:45:56 AM



Sales Code	Std/Opt	Description	\$ List	Weight
1000233	O	Powertrain Protect with SmartAccel - X15 Torque Rate Limiting	0	0
1000244	O	Gearing Analysis: Balance power/economy blend results.	0	0
1000254	O	Customer's Typical Operating Spd: 65 mph.	0	0
1000683	O	Effective VSL Setting 65.0 MPH or Greater (USA)	0	0
1000858	O	Engine Idle Shutdown Timer Disabled	0	0
1000859	O	Enable EIST Ambient Temp Override	0	0
1000891	O	Eff EIST NA Expiration Miles Use only with MX and Cummins engines	0	0
1002080	O	Air compressor: Cummins 18.7 CFM, Naturally Aspirated for Cummins X15 engines	196	0
1051200	S	Air Cleaner: composite firewall mounted PACCAR or Cummins engines	0	0
1099080	O	Pre-cleaner mounted in the hood plenum	311	0
1105220	O	Fan Hub: Horton 2-Speed for X15	5	0
1123556	O	Cooling Module: 1330 square inches. Clog Resistant. *Low clog radiators have reduced cooling capacity compared to standard radiators. Chassis configuration may be subject to engineering review for cooling capacity.	1,151	0
1160208	O	Radiator bug screen mounted between hood & grille.	130	2
1247231	O	EXH: 2021 RH Under DPF/SCR with Dual SOC tailpipes. Daycab, Extended Daycab, Modular Sleeper	1,696	0
1290442	O	Tailpipe: 7 in. dual 42 in. 45 degree curved.	729	13
1321109	O	Fuel Filter:PACCAR Standard Service Interval Fuel/Water Separator. 2017 and Later Emissions	73	0
1321205	S	Run Aid:Fuel Heat *For Fuel Filter	0	0
1321305	S	Start Aid:12V Heat *For Fuel Filter	0	0
1816260	O	Alternator: PACCAR 160 amp, brush type	-53	0
1821210	S	Batteries: 3 PACCAR GP31 threaded post (700-730) 2100-2190 CCA dual purpose.	0	0
1836106	O	Mitsubishi 105P55 12V Starter with Cummins and PX PACCAR 12 volt electrical system. W/ centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded. Only for Cummins or PX engines.	0	0
1840065	S	12V low voltage disconnect for starter battery protection.	0	0

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891233-Q4Y7Y9

Printed On: 8/9/2022 6:45:56 AM



Sales Code	Std/Opt	Description	\$ List	Weight
1901017	S	Remote PTO/Throttle, 12-Pin, Engine Bay Remote Control Provision	0	0
Transmission & Clutch				
2050007	O	Neutral Coast Mode Disabled Eaton Automated Transmission Programming.	0	0
2058756	O	Transmission:Eaton FO18E318B-MXP UltraShift Plus 18-speed w/Hill Start Aid feature. Standard with synthetic lubricant. This product should be used for heavy loads operating primarily on highway. *Torque Limit: 1850 pound-feet.	8,327	272
2250385	O	Clutch:UltraShift Plus Or Fuller Advantage Series Automated transmissions.	859	0
2406453	O	Driveline: 2 Dana SPL250XL 1 centerbearing Low maintenance offering from Spicer. On-highway 350K mi first service interval, 100K mi subsequent service interval on U-joint, splines lubed for life, quick disconnect end caps.	981	83
2429351	O	First Transmission PTO compatibility - Chelsea 230/236/238/442/489/660/680-V3 or Muncie CS8/SH8/TG8S-P1 bottom mounted 6 or 8-Bolt PTO's for all Eaton & PACCAR transmissions. This application includes use of the standard hydraulic clutch actuator on Eaton FR & RT transmissions and supports bottom mounted 6 and 8-Bolt PTO's with single acting air actuation.	0	0
2429358	O	Rear transmission support springs for transmission PTO applications are required to ensure that engine flywheel housings are not overloaded when transmission PTO's are installed.	92	0
2429361	O	First Customer Installed Eaton/PACCAR Trans PTO.	0	0
2460042	O	14" Eaton High Capacity Standard Cooler Oil to Water. For Transmission 1550-2250 LBFT, 18-speed AutoShift.	0	0
2493009	O	Aluminum clutch housing	0	0
Front Axle & Equipment				
2503467	O	Dana Spicer E-1462W Front Axle rated 14.6K 3-1/2in. drop, wide track for better turning radius.	-1,198	-80
2601605	O	Front Brakes: 13.2K Bendix RSD HP-ES S-Cam 16.5x5 in. drum brake.	-471	-62
2690002	O	Front Brake Drums: 14.6K 16.5x5 in. cast.	-266	78
2702500	O	Front Hub: iron hub pilot 14,600 lbs. 11-1/4 in. bolt circle. For use w/ air disc brakes. Consider wheelguards (5850002) w/ aluminum wheels.	-530	48
2741970	S	ConMet PreSet Plus Hub package; front axle.	0	0
2750001	S	Hubcap: front vented.	0	0
2765001	O	Front Auto Slack Adjuster.	0	0
2864116	O	Front Springs: Taperleaf 16K w/shock absorbers	-474	-85

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891233-Q4Y7Y9

Printed On: 8/9/2022 6:45:56 AM



Sales Code	Std/Opt	Description	\$ List	Weight
		w/ maintenance-free elastomer spring pin bushings. Two leaf. Standard with rubber pins. Not available on W900L.		
2895221	O	Single power steering gear: 13.2K Sheppard HD94.	-1,244	-73
2899341	O	Delete standard power steering cooler.	-199	-11
2900616	O	Threaded Bushings for taperleaf spring 16K, 18/20K, 22K, 40K replacing rubber.	95	0
Rear Axle & Equipment				
3144183	O	Dual Dana Spicer D46-172HP rear axle rated at 46K. w/ 16mm housing and 2.06in. shaft diameter. Includes pump. Tandem rear axles.	1,163	-156
3200410	O	Rear Axle Ratio - 4.10.	0	0
3304012	O	Dual Rear Brake: Bendix RSD 16.5X7 46K Capacity Reduced Stopping Distance Tractor Only. RSD-Compliant HP-ES S-Cam, tandem axle drum brake.	120	24
3392005	S	Dual Rear Brake Drums: cast.	0	0
3407050	S	Dual Rear Hubs: Aluminum hub pilot 46K 11-1/4 in. bolt circle.	0	0
3441972	S	ConMet PreSet Plus Hub package; dual rear axle.	0	0
3465002	S	Dual Rear axle automatic slack adjusters.	0	0
3485207	S	Spring Brake: 3030 long stroke dual 30 square inches travel. Helps keep brakes in adjustment longer.	0	0
3495225	O	FMVSS-136 Stability Control Schedule Review Chassis meets FMVSS-136 requirements and must be equipped with Electronic Stability Control. Reference Option code placed on order.	0	0
3495231	O	Bendix 6S/6M anti-lock brake system w/ air traction control (ATC) and electronic stability program (ESP) for tractor.	-48	15
3500057	O	Interaxle Driveline: 1 Dana SPL170XL Tandem Rear Axles Only	-175	-2
3532194	O	Wheel Differential Lock for Dana Spicer axles D40-170(P)/D46-170(H)(P)(WT) forward rear axle & rear rear axle.	2,816	112
3742020	O	Rear suspension: Tandem Hendrickson Primaax EX462 46K. Steel crossmember & gussets. 54 in. axle spacing. 10 in. ride height.	2,562	202
3830145	O	Delete standard heavy-duty air springs for rear suspension.	-37	-28
Tires & Wheels				
4083241	O	Front Tires: Yokohama RY023 11R24.5 16PR	-1,540	22
4283262	O	Rear Tires: Yokohama 709ZL 11R24.5 14PR	-932	184
4900008	O	Rear Tire Quantity: 8	0	0

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891233-Q4Y7Y9

Printed On: 8/9/2022 6:45:56 AM



Sales Code	Std/Opt	Description	\$ List	Weight
5045275	O	Front Wheel: Alcoa 98U63 24.5X8.25 AL Ultra One High Polish Wheel.	-503	-34
5245275	O	Rear Wheel: Alcoa 98U63 24.5X8.25 AL Ultra One High Polish Wheel.	1,536	-136
5900008	O	Rear Wheel/Rim Quantity: 8	0	0
Frame & Equipment				
6056700	O	Frame Rails: 10-11/16 x 3-1/2 x 1/2 in. Steel to 455 in. Truck frame weight is 4.70 lb.-in. per pair of rails. Section modulus is 22.35, RBM is 2,683,000 in.-lbs per rail. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	6,275	708
6302461	O	Bumper: Tapered chrome steel channel. Requires a bumper setting code.	592	63
6319485	S	48.5 in. Bumper setting. Requires a bumper code.	0	0
6321005	O	Removable Front Tow Hooks: 2.	278	15
6390001	O	Steel shackle links.	10	8
6391201	O	Custom Frame Layout: one chassis CFL F/T: PREV CH 472897	1,380	0
6397001	O	Huck bolts throughout frame, where possible.	307	0
6405102	O	Short length steel parallel battery box module under cab, aluminum integral step, diamond plate cover. Up to 2 air tanks may mount to bottom of box. Batteries will be oriented perpendicular on rail.	-39	53
6409901	S	Battery box location: LH Side.	0	0
6410010	O	Frame access grabhandle(s) LH mounted. Placement and quantity of grabhandles may vary due to FMCSR frame access requirements.	58	0
6410092	O	Frame access grabhandle horizontal mounted at midpoint of sleeper or Daycab.	59	2
6414003	O	Medium aluminum frame access deck plate, 36 in.	234	15
6418008	O	Frame access steps: 2 for fuel/hydraulic tank BOC, LH mount. Available when rear of tank under extends more than 14 in. behind rear of cab, sleeper, or side extender. For tanks located totally behind a cab or sleeper the front of the tank must be within 14 in. from the rear of cab, sleeper, or side extender.	195	6
6451090	S	T470,C5, T6, T8 non-polished DPF/SCR or CNG cover diamond plate w/ step. For use w/ 2010 or later exhaust systems. For T8, use extended length non-polished battery box on opposite rail to	0	0

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891233-Q4Y7Y9

Printed On: 8/9/2022 6:45:56 AM



Sales Code	Std/Opt	Description	\$ List	Weight
		match the length of under cab components. End plates will be painted standard black frame color.		
6543612	O	Fifth Wheel: ILS No-Tilt Air, Hol FW35N930YL00 30 in. slide, 9.00 in. height. No-tilt convertible w/ outboard mounting angles, 55K vertical rating, LH release. Air slide control valve standard in dash. Accommodates a 2 in. SAE kingpin. Requires some style of trailer connections.	4,847	605
6679914	O	Any changes to rear cab/sleeper area must comply w/FMCSR 399.	0	0
6679915	O	Customer-installed bulkhead and/or headache rack.	0	0
6680000		FifthWheelRearFixedSetting FW rear/fixd setting behind ahd 0 in	0	0
6721142	O	Rear mudflap arms: Fleetline FF30P, steel spring loaded & painted.	46	13
6722000	S	Rear mudflap shields: White plastic antisail w/ Kenworth logo.	0	0
6734005	O	Quarter Fenders: Stainless Steel w/ Painted Steel brackets, single post mounted.	370	55
6745270	O	Top Flange of Rear Frame bent & welded w/ crossmember. Non-towing end-of-frame configuration.	119	17
Fuel Tanks & Equip				
7214100	S	Fuel Tank: 100 US gallon 24.5in. aluminum BOC replace. Class 8 fuel tanks w/ o locking caps include an anti-siphon device on the filler neck.	0	0
7216075	O	Fuel Tank: 75 US gallon 24.5in. aluminum BOC add. Class 8 fuel tanks w/ o locking caps include an anti-siphon device on the filler neck. Multiple tank installations include a fuel equalization system w/ dual draw and return lines with a splitter valve located within 6 inches behind the cab. Single draw and return is an option in some cases.	2,072	103
7722154	O	Medium round DEF tank, 23.8 gallons. The DEF tank will be located on the side you specified. If you have specific configuration or body builder concerns, please utilize the Custom Frame Layout option. Standard capacity is calculated by fuel capacity of the vehicle and will accommodate two diesel fill-ups for every DEF fill-up. For 1:1 DEF fuel fill ratio, add 7889204.	230	15
7821300	O	Heavy-duty 7in. steel supports/straps for two 24.5in. tanks. Two supports per tank.	858	36
7840038	O	Polished cover for 1 DEF tank any size.	352	3
7889203	S	DEF to fuel fill ratio 2:1 or greater.	0	0
7889245	S	Anti-siphon device in fuel tank filler neck. For any number of fuel tanks.	0	0
7889604	S	DEF tank location is LH.	0	0
7930100	S	Location: 100 gal fuel tank RH behind cab	0	0

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891233-Q4Y7Y9

Printed On: 8/9/2022 6:45:56 AM



Sales Code	Std/Opt	Description	\$ List	Weight
7940075	O	Location: 75 gal fuel tank LH behind cab	0	0
Cab & Equipment				
8025301	S	Cab: Stamped aluminum cab with panoramic curved glass windshield. Standard with stamped aluminum doors, heavy duty in-swinging hinges, and triple sealed doors. Manufactured using self-piercing rivets and structural adhesive. Includes LED exterior marker lights and turn signals.	0	0
8090604	O	Hood: T880 Standard Length With Mechanically Fastened Fenders. 122.6 inch BBC.	345	15
8108011	S	Cab HVAC - Day Cab and 40in Sleeper System With Defrost, A/C, and 48,000 BTU/hr Heater. Includes automatic temperature control with one touch defrost operation and dash mounted cab temperature and solar intensity sensors. Pleated fresh air filter and cabin recirculation air filter standard. The Kenworth HVAC system is designed to provide optimal heating and cooling in all operating environments without need for additional insulation. Cab HVAC without sleeper heater AC is available with 40in sleeper.	0	0
8201047	S	Kenworth Smartwheel: 18 in. Non-Leather With Integrated Radio and Cruise Controls.	0	0
8201052	S	Column Mtd TMSN Control W/Retarder Cntrl, RH Side Use with Automated and Automated Manual Transmissions Only	0	0
8201200	S	Adjustable telescoping tilt steering column.	0	0
8203196	O	Dash Mounted Compact Trailer Brake Valve. Self Returning.	0	0
8205087	O	Auto Suspension Dump W/PTO Engagement Interlock. This feature automatically dumps air from the truck suspension when any PTO is engaged. The intent of this feature is to deflate the air suspension air bags while the load is raised to help alleviate any imbalance or instability that can occur with the air bags inflated.	65	2
8205164	O	Dash Switch: 1st Single-Acting Eaton or PACCAR Mounted PTO. Electric switch, wiring, software, air solenoids, and plumbing are factory-installed to control the 1st Eaton (single-acting) trans PTO.	107	0
8221144	O	Gauge: Air suspension pressure gauge.	112	0
8221160	O	Gauge: Engine Oil Temperature Gauge With Integral warning light. The NavPlus HD unit includes a virtual engine oil temperature gauge.	40	0
8222404	S	Gauge: DD Virtual Gauge - Oil Temp Engine	0	0
8222409	S	Gauge: DD Virtual Gauge - Air Filter Restriction	0	0
8222413	S	Gauge: DD Virtual Gauge - Manifold Pressure Boost	0	0
8222414	S	Gauge: DD Virtual Gauge - Engine Percent	0	0

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891233-Q4Y7Y9

Printed On: 8/9/2022 6:45:56 AM



Sales Code	Std/ Opt	Description	\$ List	Weight
		Torque		
8222712	O	Gauge: Fuel filter restriction gauge.	135	0
8222722	O	Gauge: Manifold Pressure Gauge. The NavPlus HD unit includes a virtual manifold pressure gauge.	31	0
8225658	O	Gauge: Axle oil temperature, dual-drive axle. (2 gauges) w/integral warning light.	215	0
8282027	S	Main Instrument Package: 15" Digital Display. Includes Speedometer, Tachometer, Primary Air Pressure, Secondary Air Pressure, Fuel Level #1, DEF Level, DPF Filter Status, Fuel Economy, Oil Pressure, Coolant Temp, OAT and Voltmeter, and Air Application.	0	0
8282108	O	Modular Dash Options: RH Dash storage unit with two shelves. Reduces total gauge count; HD by 6 and MD by 4.	46	0
8282120	O	USB Charging Port - Dash Panel *Requires 15" Digital Display 8282027/8282028	0	0
8300008	S	Interior color: Slate Gray	0	0
8330102	S	Interior package: Vantage daycab Includes durable headliner and vinyl sidewalls with geometric patterned trim and anodized aluminum accents throughout. Convenient overhead storage cubbies, full size glove box, two center console cupholders, and large door pad map pocket. Standard LH/RH power windows, electric door locks, interior LED lighting, nighttime-friendly red ambient lighting for dash and footwell, and door mounted courtesy light. Includes two standard 12V power outlets. Driver sunvisor includes strap.	0	0
8390634	S	Rubber floormat	0	0
8410272	O	Driver Seat: GT702 HB with DuraCloth material. The GT702 is standard with a single air bag, scissor linkage seat suspension that incorporates seat height memory, auto-leveling valves with exit air dump, and adjustable damper. It includes a dual chamber lumbar support, 10in Fore/Aft adjustment, 5in Up/Down adjustment with protection zones, 2.5in pan extension, 51 degree seat back recline, and 16 degree full seat tilt. Includes 3-point matching seat belts. DR seat standard w/ dual armrests.	329	10
8460272	O	Rider Seat: GT702 HB with DuraCloth material. The GT702 is standard with a single air bag, scissor linkage seat suspension that incorporates seat height memory, auto-leveling valves with exit air dump, and adjustable damper. It includes a dual chamber lumbar support, 10in Fore/Aft adjustment, 5in Up/Down adjustment with protection zones, 2.5in pan extension, 51 degree seat back recline, and 16 degree full seat tilt. Includes 3-point matching seat belts. Rider seat standard w/ LH armrest.	600	44
8490187	O	Seat Color: Gray	0	0
8601432	O	Kenworth Radio DEA710 AM/FM/WB/USB, Bluetooth	37	0
8698974	S	Base Level Audio System - Daycab:High Performance Door Speakers.	0	0

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891233-Q4Y7Y9

Printed On: 8/9/2022 6:45:56 AM



Sales Code	Std/Opt	Description	\$ List	Weight
8699926	O	CB installation kit: Center mounted of header. W/header mounted quick release CB mount. One red power post & one black ground post. Includes dual antenna leads located on the mirror brackets. Includes dual antenna & separate speaker.	289	2
8700196	O	Turn Signal: Self-Cancelling	17	0
8700283	S	LH and RH Trip Ledge Rain Deflectors	0	0
8700663	S	Kenworth TruckTech+ The Kenworth Remote Diagnostics system provides the Worlds Best reporting of engine and aftertreatment fault codes, as well as enhanced support for the truck owner through rapid communication of fault severity and recommended actions. This option is Standard on all Heavy Duty Kenworths with a PACCAR MX engine, Cummins X15 engine, PX engine or Natural Gas engine. Optional on Medium Duty Kenworths.	0	0
8800260	O	Long grabhandle RH side mounted to side-of-cab exhaust.	66	2
8800262	O	Long grabhandle LH side mounted to side-of-cab exhaust.	66	2
8800402	S	Dual Cab Interior Grabhandles: A Pillar Mounted Dash Wrap and B Pillar Mounted Grabhandles	0	0
8832113	S	Kenworth Daylite Door with standard LH/RH electric door locks and LH/RH electric window controls.	0	0
8841618	O	Dual rectangular air horn 23 in. LH & RH top of roof. Includes air horn covers.	246	4
8850139	S	Look-Down, Pass. Door, Black 11x6	0	0
8865002	S	Aero Mirror: Dual Kenworth Aerodynamic Motorized heated mirrors, 7in X 13in with cab color mirror shell and black mirror arms. Also includes LH/RH heated 6in X 7in convex mirrors. Mirror brackets set for 8-1/2 ft load width. Mirror controls located on driver side door pad.	0	0
8871446	S	Rear cab stationary window 19in x 36in	0	0
8890038	O	3.5in x 11.5in Plastic Records Holder:Mounted On Rear Cab Panel. Not available With Sleeper Or 2 Person Bench Seat.	64	0
8890101	S	One-piece bonded-in windshield with curved glass. Standard.	0	0
8890135	S	Exterior stainless steel sunvisor.	906	19
8890300	O	Fender close-out: Below headlamp, behind bumper. *NOT available with 3-piece bumper.	209	0
8890359	O	Delete Wheelwell Fender Extension	-291	-4
8890876	S	Kenworth Cab/Sleeper Air Suspension.	0	0
Lights & Instruments				
9010553	S	Headlamps: SAE Dual Halogen Complex Reflector	0	0

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891233-Q4Y7Y9

Printed On: 8/9/2022 6:45:56 AM



Sales Code	Std/ Opt	Description	\$ List	Weight
9022137	S	Marker Lights: Five, rectangular, LED	0	0
9030016	S	Turn Signal Lights: Flush mounted LED. Mounted at top of fender wheel arc.	0	0
9030052	S	LED Stop, Turn, Tail: With Two LED Backup Lights and With An LED License Plate.	0	0
9058085	O	SW/WIRE/IND LT: C/I FLOOD 1ST SW THRU GROMMET UNDER CAB	136	0
9080206	O	Switch and Wiring: Cust. Installed Beacon Lights With Additional 20ft Jumper Harness Shipped Loose	240	1
9090027	O	Headlamps to turn on when wipers are active.	0	0
9090039	S	Marker Lights: Interrupter Switch. Included in Turn Signal For All Models Except T3. The T3 Switch Is In The Dash.	0	0
9090052	O	Brake Lights on when Engine Brake Active. Can only be selected when chassis also has engine brake. Cannot be used with options to delete engine brake.	0	0
9090126	O	Electric Backup Alarm: Meets SAE J994 & OSHA requirements.	167	4
9090849	O	Polyswitches replacing fuses. Switch will automatically reset after removal of excess load.	49	0
Air Equipment				
9101219	O	Air Dryer: Bendix AD-HF Extended Purge Heated With Puraguard	132	0
9108001	S	Moisture ejection valve w/ pull cable drain.	0	0
9110071	O	Tractor kit: Center frame-mounted w/ hosetenna. Includes composite gladhand/light plug holder. Kit includes dash mounted trailer air supply valve, trailer hand control valve, and hoses/fittings for the valves. Dash mounted parking brake valve and tractor protection valve are standard. Air lines are detachable at one end only, light lines are detachable at both ends. Conspicuity components are standard.	1,197	24
9121043	O	Phillips 15ft coiled light line w/ metal plugs & 6 in. lead. Must code for tractor kit.	72	4
9121115	O	Coiled air & light lines replacing straight lines Included in tractor kit. 15ft working length.	80	2
9140020	S	Nylon air tubing in frame & cab, excluding hoses subject to excessive heat or flexing.	0	0
9140328	O	Trailer ABS electric supply through SAE J560 7-pin connector per TMC RP137).	0	0
9140702	O	Optional Hosetenna Bracket Location 2ft BOC/sleeper. Hosetenna bracket will be located plus or minus six inches from any non-standard location requested	15	0

Extended Warranty

Price Level: January 1, 2022
 Deal: MAS MML ALM ACCA FAC
 Printed On: 8/9/2022 6:45:56 AM

100% Complete

Date: August 09, 2022
 Quote Number: QUO-891233-Q4Y7Y9



Sales Code	Std/Opt	Description	\$ List	Weight
9200021	S	Base Warranty - Standard Service Heavy Duty 12 months / 100,000 miles / 160,000 km.	0	0
9212611	O	24 Month TruckTech+ Subscription for Cummins Engines	0	0
9220001	O	Base Warranty: Emissions 5YR/100K MI - EPA Engine (Does not include CARB Clean Idle sticker)	0	0
Miscellaneous				
9407014	U	PREPAID FREIGHT ADJUSTMENT <i>Narr PREPAID FREIGHT ADJUSTMENT</i>	-300	0
9409852	O	GHG Secondary Manufacturer: Does Not Apply	0	0
9490206	O	Warning triangle reflector kit: Shipped loose. Kit consists of 3 triangles in plastic carrying case. Not floor mounted.	48	4
9490404	O	One 5 lb. dry chemical type fire extinguisher mounted outboard of driver seat. Class ABC.	149	11
9491659	S	VMUX Architecture	0	0
Promotions				
Paint				
9700000	O	Paint color number(s). N9702 A - L0006 WHITE N9720 FRAME N0001 BLACK	0	0
9943004	O	Bumper Unpainted	0	0
9943048	O	Day Cab Bulk Paint	0	0
9943050	O	Day Cab Standard Paint	0	0
9944820	S	1 - Color Paint - Day Cab Color will be White if no other color is specified.	0	0
9965510	S	Base coat/clear coat. The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0	0

Order Comments



Total List Price (W/O Freight & Warranty & Surcharges)	\$260,121
Marketing and Service Support Fee	\$940
Prepaid Freight	\$2,825
Total Surcharge/Options Not Subject To Discount	\$0
Total Weight	18,265

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in CRM.

PRICING DISCLAIMER

While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information



Shipping Destinations

Intermediate Destination:

Final Destinations	Quantity
--------------------	----------



TRUCKWORX

Jay Callaway
 Truckworx – Jackson
 2220 Finley Blvd
 Birmingham, AL 35234
 Office: 601.939.5300
 Cell: 601.702.1923
 Email: jonathanc@truckworx.com
 www.TRUCKWORX.com

Attn: ACCA Administration

October 22 2022

Dear ACCA Valued customer:

Please be advised that production will be limited to 71 slots for next year's contract. The deadline to obtain calendar year 2023 build slots will be March 15, 2023. Due to OEM production constraints, build slot(s) will be limited to 71.


2024 T880S Kenworth Tractor Truck	
Engine X15	500 HP with 1850 torque
Transmission	18 Speed Automated
Front Axle Meritor or Dana	14k
Air Ride Rear Suspension	46,000
Wheelbase	216
Tires	11 R24.5
Ratio	4.30
Fan hub on/off or Two speed fan hub	2-speed fan hub
Cooling Module	1330 square inches
Air Compressor	25.9 or greater
Alternator	160 brush type
Color: White or Red	
Total Price \$204,000.00	
Includes all options	
(71) Slots available for 2022	



Thank you for your consideration of our proposal. Please feel free to contact me if you have any questions. I look forward to providing you with "The World's Best!" F.O.B destination.

CC: File Martha Cooke (Marthac@truckworx.com)


 Jay Callaway
 Vice President of Government Affairs

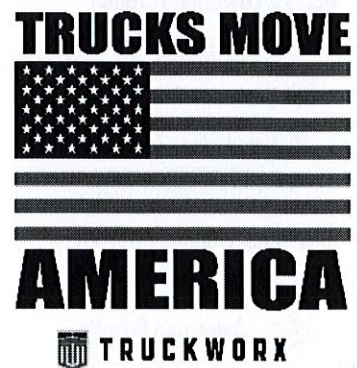



TRUCKWORX KENWORTH - BIRMINGHAM (K415)
 2220 FINLEY BOULEVARD
 BIRMINGHAM, Alabama 35234

MAS MML ALM ACCA FAC
 4321 MAIN STREET
 JACKSON, Mississippi 39073
 United States of America

Jonathan Callaway
 Cell Phone: 601-702-1923
 Office Phone: 601-939-5300
 Email: jonathanc@truckworx.com

Truck Buyer
 Email: truck@buyer.com

Vehicle Summary

Unit		Chassis	
Model:	T880 Series Conventional	Fr Axle Load (lbs):	13200
Type:	TRACTOR	Rr Axle Load (lbs):	46000
Description 1:	MAS MML ALM ACCA FAC	G.C.W. (lbs):	100000
Description 2:	Clone of Chassis 236139 T880 Series Conventional		
Application		Road Conditions:	
Intended Serv.:	Local pickup & delivery: Vehicles which	Class A (Highway)	89
Commodity:	Heavy machinery.	Class B (Hwy/Mtn)	10
		Class C (Off-Hwy)	1
		Class D (Off-Road)	0
		Maximum Grade:	6
Body		Wheelbase (in):	216
Type:		Overhang (in):	61
Length (ft):	0	Fr Axle to BOC (in):	86
Height (ft):	0		
Max Laden Weight (lbs):	0		
		Cab to Axle (in):	130
Trailer		Cab to EOF (in):	191
No. of Trailer Axles:	2	Overall Comb. Length (in):	797.5
Type:	Lowboy		
Length (ft):	48	Special Req.	
Height (ft):	13.5	U.S. Domestic registry, 50-state.	
Kingpin Inset (in):	24		
Corner Radius (in):	0		
Restrictions			
Length (ft):	120		
Width (in):	102		
Height (ft):	13.5		

Approved by:



Date:

10/4/22

Note: All sales are F.O.B. designated plant of manufacture.



Sales Code	Std/Opt	Description	\$ List	Weight
Model				
0000810	S	T880 Series Conventional	213,378	15,549
0070060	S	T880	0	0
0072000	O	Chassis operation will not incl. stationary application. Stationary operation is defined as running the engine under load while stationary at a substantial fraction of engine gross horsepower (60% or greater) for an extended period of time (longer than 5 - 10 minutes).	0	0
0080075	O	Dealer/Customer declines engine w/CARB Idle Emissions Reduction Feature.	0	0
0090000	S	Non-Sleeper w/rear axle capacity less than 59K.	0	0
0098424	O	State of Registry: Mississippi	0	0
Engine & Equipment				
0701206	O	MX-13 510 510@1600 1850@1000 2021 with Engine Brake N09020 AE001 NO....ENBL MX RETARDER IN NEUTRAL N08200 AE002 650...IDLE TARGET N09100 AA003 75....CC MAX TARGET SPD N09110 AA004 10....CC MIN ENABLE SPD N09120 AA005 OFF...DYNAMIC CC ENABLE N09440 AA061 2000..CAB:MAX ENG SPD-ACCEL CNTRL N09430 AA062 2000..CAB: MAX ENG SPD - SW CNTRL N09420 AA063 6....CAB: MAX VEH SPD N09510 AA065 800...CAB: DEDICATED PRESET "-" N09520 AA066 900...CAB: DEDICATED PRESET "+" N09780 AA049 CNCL..CAB: CUSTOM PRESET 1 FUNC N09640 AA050 0....CAB: CUSTOM PRESET 1 N09790 AA051 CNCL..CAB: CUSTOM PRESET 2 FUNC N09650 AA052 0....CAB: CUSTOM PRESET 2 N09800 AA053 CNCL..CAB: CUSTOM PRESET 3 FUNC N09660 AA054 0....CAB: CUSTOM PRESET 3 N09500 AA060 OFF...CAB: PRESET +/- SW TYPE N09630 AA067 TRQ...CAB:ACCEL PEDAL TYPE IN PTO N09400 AA068 YES...CAB:ACCEL ACTV IN CAB PTO N09470 AA055 OFF...CAB: CLUTCH INTLK N09840 AA056 OFF...CAB: CUSTOMER INTLK N09480 AA057 ON....CAB: NEUTRAL INTLK N09460 AA058 ON....CAB: PARK BRK INTLK N09490 AA059 ON....CAB:SER BRK INTLK:NO PTO N09540 AA074 2000..REM:MAX ENG SPD-ACCEL CNTRL N09530 AA075 2000..REM:MAX ENGSPD-SW/TSC1 CTRL N09610 AA077 800...REM: DEDICATED PRESET "-" N09620 AA078 900...REM: DEDICATED PRESET "+" N09810 AA043 CNCL..CAB/REM:CUSTOM PRESET1 FUNC N09670 AA044 750...CAB/REM: CUSTOM PRESET 1 N09820 AA045 CNCL..CAB/REM:CUSTOM PRESET2 FUNC	1,767	0

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891231-K8S1H2

Printed On: 8/9/2022 6:48:35 AM



Sales Code	Std/Opt	Description	\$ List	Weight
		N09680 AA046 850...CAB/REM:CUSTOM PRESET 2		
		N09830 AA047 CNCL..CAB/REM:CUSTOM PRESET3 FUNC		
		N09690 AA048 950...CAB/REM: CUSTOM PRESET 3		
		N09600 AA079 OFF...REM: PRESET +/- SW TYPE		
		N09410 AA069 YES...PTO REM PEDAL ENABLE		
		N09560 AA070 OFF...REM: CLUTCH INTLK		
		N09700 AA071 OFF...REM: CUSTOMER INTLK		
		N09570 AA072 OFF...REM: NEUTRAL INTLK		
		N09580 AA073 OFF...REM:SER BRK INTLK:NO PTO		
		N09550 AA076 650...REM: MIN ENG SPD		
		N09450 AA064 650...CAB: MIN ENG SPD		
		N09760 AA009 5.....DRIVER REWARD VEH SPD BONUS		
		N09770 AA010 -5....DRIVER REWARD VEH SPD PNLTY		
		N09750 AA013 NONE..OFFSET MODE		
		N09720 AA015 3.....MIN SPD FOR DR SHIFT AID		
		N09730 AA016 1.....DSA LOWEST ACTV GEAR		
		N09740 AA017 18....DSA HIGHEST ACTV GEAR		
		N09340 AA019 YES...EIST PARK BRK RESET ENABLE		
		N09300 AA022 30....EIST LO CLNT TEMP OVERRIDE		
		N09290 AA023 80....EIST HI AMBAIR TEMP OVRRDE		
		N09280 AA024 39....EIST LO AMBAIR TEMP OVRRDE		
		N09260 AA025 5.....EIST PTO MAX IDLE TIME		
		N09230 AA026 5.....EIST PARKED MAX IDLE TIME		
		N09220 AA027 5.....EIST STANDSTILL IDLE TIME		
		N09240 AA029 YES...EIST RESET FROM ENG LOAD		
		N09250 AA030 NO...EIST OVERRIDE FROM ENG LOAD		
		N09200 AA031 0.....EIST EXPIRATION DISTANCE		
		N09310 AA032 YES...EIST ACCEL PEDAL RESET		
		N09330 AA033 YES...EIST SERVICE BRK RESET		
		N09320 AA034 YES...EIST CLUTCH PEDAL RESET		
		N09270 AA035 YES...EIST PTO OVERRIDE		
		N08030 AA086 75....MAX ACCEL PEDAL VEH SPD		
		N08000 AA087 0.....VSL EXPIRATION DISTANCE		
		N08020 AA088 75....LRSL SPD LMT		
		N09350 AA042 1500..FAST IDLE CNTRL MAX ENG SPD		
		N09050 AA037 4.....DSL SPD OFFSET		
		N09040 AA038 2.....AUTO RTRDR VEH SPD OFFSET		
		N09030 AA039 0.....TIME DELAY FOR RTRDR ACT		
		N09130 AA006 MT...MULTI TORQUE IN CC		
		N09080 AQ001 4.....PCC Negative Offset		
		N09090 AQ002 4.....PCC Positive Offset		
		N09710 AA089 NO...REMOTE INPUTS IN CAB PTO		
		N08200 AE002 650...IDLE TARGET		
1000046	O	EPA Emissions Warranty Engine	0	0
1000151	S	PremierSpec	0	0
1000206	O	Engine monitoring protection -Shutdown- PACCAR MX engine parameter.	0	0
1000243	O	Gearing Analysis: Performance power before economy results.	0	0

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891231-K8S1H2

Printed On: 8/9/2022 6:48:35 AM



Sales Code	Std/Opt	Description	\$ List	Weight
1000253	O	Customer's Typical Operating Spd: 63 MPH	0	0
1000282	O	MX Retarder State Cruise Control On Manual Mode Selecting this code will program the engine controller to make manual mode available when cruise control is on, but not set, and the engine brake switch is on. Manual mode means the engine retarder activates whenever the throttle pedal is not depressed. 2013+	0	0
1000683	O	Effective VSL Setting 65.0 MPH or Greater (USA)	0	0
1000858	O	Engine Idle Shutdown Timer Disabled	0	0
1000891	O	Eff EIST NA Expiration Miles Use only with MX and Cummins engines	0	0
1006003	S	Air Compressor: WABCO 25.9 CFM PACCAR MX 2017+ 440cc Air Compressor	0	0
1051200	S	Air Cleaner: composite firewall mounted PACCAR or Cummins engines	0	0
1099080	O	Pre-cleaner mounted in the hood plenum	311	0
1105210	S	Fan hub: Horton 2-Speed for PACCAR MX	0	0
1123556	O	Cooling Module: 1330 square inches. Clog Resistant. *Low clog radiators have reduced cooling capacity compared to standard radiators. Chassis configuration may be subject to engineering review for cooling capacity.	1,151	0
1247231	O	EXH: 2021 RH Under DPF/SCR with Dual SOC tailpipes. Daycab, Extended Daycab, Modular Sleeper	1,696	0
1290442	O	Tailpipe: 7 in. dual 42 in. 45 degree curved.	729	13
1321101	S	Fuel Filter: PACCAR Extended Service Interval On-Engine Fuel/Water Separator. 2021 Emissions MX Engines only.	0	0
1321205	S	Run Aid:Fuel Heat *For Fuel Filter	0	0
1321305	S	Start Aid:12V Heat *For Fuel Filter	0	0
1812163	S	Alternator: PACCAR HDS 160 AMP Brushed	0	0
1821210	S	Batteries: 3 PACCAR GP31 threaded post (700-730) 2100-2190 CCA dual purpose.	0	0
1836102	S	PACCAR Premium 12V Starter with PACCAR MX Engines PACCAR 12 volt electrical system. With centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded.	0	0
1840065	S	12V low voltage disconnect for starter battery protection.	0	0
1901017	S	Remote PTO/Throttle, 12-Pin, Engine Bay Remote Control Provision	0	0
1903008	O	Steel Oil Pan for PACCAR MX Engines	1,001	10

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891231-K8S1H2

Printed On: 8/9/2022 6:48:35 AM



Sales Code	Std/Opt	Description	\$ List	Weight
1903020	O	Decline Driver Performance Assistant (DPA)	0	0
Transmission & Clutch				
2050007	O	Neutral Coast Mode Disabled Eaton Automated Transmission Programming.	0	0
2058756	O	Transmission:Eaton FO18E318B-MXP UltraShift Plus 18-speed w/Hill Start Aid feature. Standard with synthetic lubricant. This product should be used for heavy loads operating primarily on highway. *Torque Limit: 1850 pound-feet.	8,327	272
2250385	O	Clutch:UltraShift Plus Or Fuller Advantage Series Automated transmissions.	859	0
2406453	O	Driveline: 2 Dana SPL250XL 1 centerbearing Low maintenance offering from Spicer. On-highway 350K mi first service interval, 100K mi subsequent service interval on U-joint, splines lubed for life, quick disconnect end caps.	981	83
2429351	O	First Transmission PTO compatibility - Chelsea 230/236/238/442/489/660/680-V3 or Muncie CS8/SH8/TG8S-P1 bottom mounted 6 or 8-Bolt PTO's for all Eaton & PACCAR transmissions. This application includes use of the standard hydraulic clutch actuator on Eaton FR & RT transmissions and supports bottom mounted 6 and 8-Bolt PTO's with single acting air actuation.	0	0
2429361	O	First Customer Installed Eaton/PACCAR Trans PTO.	0	0
2460042	O	14" Eaton High Capacity Standard Cooler Oil to Water. For Transmission 1550-2250 LBFT, 18-speed AutoShift.	0	0
2493009	O	Aluminum clutch housing	0	0
Front Axle & Equipment				
2503467	O	Dana Spicer E-1462W Front Axle rated 14.6K 3-1/2in. drop, wide track for better turning radius.	-1,198	-80
2601605	O	Front Brakes: 13.2K Bendix RSD HP-ES S-Cam 16.5x5 in. drum brake.	-471	-62
2690002	O	Front Brake Drums: 14.6K 16.5x5 in. cast.	-266	78
2702500	O	Front Hub: iron hub pilot 14,600 lbs. 11-1/4 in. bolt circle. For use w/ air disc brakes. Consider wheelguards (5850002) w/ aluminum wheels.	-530	48
2741970	S	ConMet PreSet Plus Hub package; front axle.	0	0
2750001	S	Hubcap: front vented.	0	0
2765001	O	Front Auto Slack Adjuster.	0	0
2864105	O	Front Springs: Taperleaf 14.6K w/shock absorbers. With maintenance-free elastomer spring pin bushings. Standard with rubber pins. T880 set forward axle only.	-682	-115
2895221	O	Single power steering gear: 13.2K Sheppard HD94.	-1,244	-73
2899341	O	Delete standard power steering cooler.	-199	-11

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891231-K8S1H2

Printed On: 8/9/2022 6:48:35 AM



Sales Code	Std/Opt	Description	\$ List	Weight
Rear Axle & Equipment				
3144183	O	Dual Dana Spicer D46-172HP rear axle rated at 46K. w/ 16mm housing and 2.06in. shaft diameter. Includes pump. Tandem rear axles.	1,163	-156
3200430	O	Rear Axle Ratio - 4.30.	0	0
3304012	O	Dual Rear Brake: Bendix RSD 16.5X7 46K Capacity Reduced Stopping Distance Tractor Only. RSD-Compliant HP-ES S-Cam, tandem axle drum brake.	120	24
3392005	S	Dual Rear Brake Drums: cast.	0	0
3407050	S	Dual Rear Hubs: Aluminum hub pilot 46K 11-1/4 in. bolt circle.	0	0
3441972	S	ConMet PreSet Plus Hub package; dual rear axle.	0	0
3465002	S	Dual Rear axle automatic slack adjusters.	0	0
3485207	S	Spring Brake: 3030 long stroke dual 30 square inches travel. Helps keep brakes in adjustment longer.	0	0
3495225	O	FMVSS-136 Stability Control Schedule Review Chassis meets FMVSS-136 requirements and must be equipped with Electronic Stability Control. Reference Option code placed on order.	0	0
3495231	O	Bendix 6S/6M anti-lock brake system w/ air traction control (ATC) and electronic stability program (ESP) for tractor.	-48	15
3500057	O	Interaxle Driveline: 1 Dana SPL170XL Tandem Rear Axles Only	-175	-2
3532194	O	Wheel Differential Lock for Dana Spicer axles D40-170(P)/D46-170(H)(P)(WT) forward rear axle & rear rear axle.	2,816	112
3742020	O	Rear suspension: Tandem Hendrickson Primaax EX462 46K. Steel crossmember & gussets. 54 in. axle spacing. 10 in. ride height.	2,562	202
3830145	O	Delete standard heavy-duty air springs for rear suspension.	-37	-28
Tires & Wheels				
4083241	O	Front Tires: Yokohama RY023 11R24.5 16PR	-1,540	22
4277538	O	Rear Tires: Bridgestone M713 Ecopia 11R24.5 14PR. Code is priced per pair of tires.	708	128
4900008	O	Rear Tire Quantity: 8	0	0
5045275	O	Front Wheel: Alcoa 98U63 24.5X8.25 AL Ultra One High Polish Wheel.	-503	-34
5245275	O	Rear Wheel: Alcoa 98U63 24.5X8.25 AL Ultra One High Polish Wheel.	1,536	-136
5900008	O	Rear Wheel/Rim Quantity: 8	0	0

Frame & Equipment

Price Level: January 1, 2022
 Deal: MAS MML ALM ACCA FAC
 Printed On: 8/9/2022 6:48:35 AM

100% Complete

Date: August 09, 2022
 Quote Number: QUO-891231-K8S1H2



Sales Code	Std/ Opt	Description	\$ List	Weight
6056700	O	Frame Rails: 10-11/16 x 3-1/2 x 1/2 in. Steel to 455 in. Truck frame weight is 4.70 lb.-in. per pair of rails. Section modulus is 22.35, RBM is 2,683,000 in-lbs per rail. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	6,275	638
6302461	O	Bumper: Tapered chrome steel channel. Requires a bumper setting code.	592	63
6319295	O	29.5 in. Bumper setting. Requires a bumper code.	0	0
6321005	O	Removable Front Tow Hooks: 2.	278	15
6390001	O	Steel shackle links.	10	8
6397001	O	Huck bolts throughout frame, where possible.	307	0
6405082	O	T8 parallel polished aluminum battery box module w/ integral step. Extended length for use w/ 2010 and later SCR style exhaust. Up to 2 air tanks may mount to bottom of box. Batteries will be oriented perpendicular on rail.	1,366	72
6409901	S	Battery box location: LH Side.	0	0
6410010	O	Frame access grabhandle(s) LH mounted. Placement and quantity of grabhandles may vary due to FMCSR frame access requirements.	58	0
6410092	O	Frame access grabhandle horizontal mounted at midpoint of sleeper or Daycab.	59	2
6414003	O	Medium aluminum frame access deck plate, 36 in.	234	15
6418008	O	Frame access steps: 2 for fuel/hydraulic tank BOC, LH mount. Available when rear of tank under extends more than 14 in. behind rear of cab, sleeper, or side extender. For tanks located totally behind a cab or sleeper the front of the tank must be within 14 in. from the rear of cab, sleeper, or side extender.	195	6
6451094	O	T470, C5, T6, T8 polished DPF/SCR or CNG cover with step. For use w/ 2010 or later exhaust systems. For T8, use extended length polished battery box on opposite rail to match the length of under cab components.	431	0
6543612	O	Fifth Wheel: ILS No-Tilt Air, Hol FW35N930YL00 30 in. slide, 9.00 in. height. No-tilt convertible w/ outboard mounting angles, 55K vertical rating, LH release. Air slide control valve standard in dash. Accommodates a 2 in. SAE kingpin. Requires some style of trailer connections.	4,847	605
6679821	U	2021 SERIES EMISSIONS ENGINE <i>Narr 2021 SERIES EMISSIONS ENGINE</i>	0	0
6679914	O	Any changes to rear cab/sleeper area must comply w/FMCSR 399.	0	0

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891231-K8S1H2

Printed On: 8/9/2022 6:48:35 AM



Sales Code	Std/Opt	Description	\$ List	Weight
6679915	O	Customer-installed bulkhead and/or headache rack.	0	0
6680000		FifthWheelRearFixedSetting FW rear/fixed setting behind ahd 0 in	0	0
6721142	O	Rear mudflap arms: Fleetline FF30P, steel spring loaded & painted.	46	13
6722000	S	Rear mudflap shields: White plastic antisail w/ Kenworth logo.	0	0
6734005	O	Quarter Fenders: Stainless Steel w/ Painted Steel brackets, single post mounted.	370	55
6745270	O	Top Flange of Rear Frame bent & welded w/ crossmember. Non-towing end-of-frame configuration.	119	17
Fuel Tanks & Equip				
7214100	S	Fuel Tank: 100 US gallon 24.5in. aluminum BOC replace. Class 8 fuel tanks w/ o locking caps include an anti-siphon device on the filler neck.	0	0
7216075	O	Fuel Tank: 75 US gallon 24.5in. aluminum BOC add. Class 8 fuel tanks w/ o locking caps include an anti-siphon device on the filler neck. Multiple tank installations include a fuel equalization system w/ dual draw and return lines with a splitter valve located within 6 inches behind the cab. Single draw and return is an option in some cases.	2,072	103
7722154	O	Medium round DEF tank, 23.8 gallons. The DEF tank will be located on the side you specified. If you have specific configuration or body builder concerns, please utilize the Custom Frame Layout option. Standard capacity is calculated by fuel capacity of the vehicle and will accommodate two diesel fill-ups for every DEF fill-up. For 1:1 DEF fuel fill ratio, add 7889204.	230	15
7821300	O	Heavy-duty 7in. steel supports/straps for two 24.5in. tanks. Two supports per tank.	858	36
7840038	O	Polished cover for 1 DEF tank any size.	352	3
7889203	S	DEF to fuel fill ratio 2:1 or greater.	0	0
7889245	S	Anti-siphon device in fuel tank filler neck. For any number of fuel tanks.	0	0
7889604	S	DEF tank location is LH.	0	0
7930100	S	Location: 100 gal fuel tank RH behind cab	0	0
7940075	O	Location: 75 gal fuel tank LH behind cab	0	0
Cab & Equipment				
8025301	S	Cab: Stamped aluminum cab with panoramic curved glass windshield. Standard with stamped aluminum doors, heavy duty in-swinging hinges, and triple sealed doors. Manufactured using self-piercing rivets and structural adhesive. Includes LED exterior marker lights and turn signals.	0	0

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891231-K8S1H2

Printed On: 8/9/2022 6:48:35 AM



Sales Code	Std/Opt	Description	\$ List	Weight
8090139	O	Hood: T880 Set-Fwd Short Length W/Mech. Fastened Fenders	0	0
8108011	S	Cab HVAC - Day Cab and 40in Sleeper System With Defrost, A/C, and 48,000 BTU/hr Heater. Includes automatic temperature control with one touch defrost operation and dash mounted cab temperature and solar intensity sensors. Pleated fresh air filter and cabin recirculation air filter standard. The Kenworth HVAC system is designed to provide optimal heating and cooling in all operating environments without need for additional insulation. Cab HVAC without sleeper heater AC is available with 40in sleeper.	0	0
8201047	S	Kenworth Smartwheel: 18 in. Non-Leather With Integrated Radio and Cruise Controls.	0	0
8201052	S	Column Mtd TMSN Control W/Retarder Cntrl, RH Side Use with Automated and Automated Manual Transmissions Only	0	0
8201200	S	Adjustable telescoping tilt steering column.	0	0
8203196	O	Dash Mounted Compact Trailer Brake Valve. Self Returning.	0	0
8205087	O	Auto Suspension Dump W/PTO Engagement Interlock. This feature automatically dumps air from the truck suspension when any PTO is engaged. The intent of this feature is to deflate the air suspension air bags while the load is raised to help alleviate any imbalance or instability that can occur with the air bags inflated.	65	2
8205164	O	Dash Switch: 1st Single-Acting Eaton or PACCAR Mounted PTO. Electric switch, wiring, software, air solenoids, and plumbing are factory-installed to control the 1st Eaton (single-acting) trans PTO.	107	0
8221144	O	Gauge: Air suspension pressure gauge.	112	0
8221160	O	Gauge: Engine Oil Temperature Gauge With Integral warning light. The NavPlus HD unit includes a virtual engine oil temperature gauge.	40	0
8222404	S	Gauge: DD Virtual Gauge - Oil Temp Engine	0	0
8222409	S	Gauge: DD Virtual Gauge - Air Filter Restriction	0	0
8222413	S	Gauge: DD Virtual Gauge - Manifold Pressure Boost	0	0
8222414	S	Gauge: DD Virtual Gauge - Engine Percent Torque	0	0
8222712	O	Gauge: Fuel filter restriction gauge.	135	0
8222722	O	Gauge: Manifold Pressure Gauge. The NavPlus HD unit includes a virtual manifold pressure gauge.	31	0
8225658	O	Gauge: Axle oil temperature, dual-drive axle. (2 gauges) w/integral warning light.	215	0
8282027	S	Main Instrument Package: 15" Digital Display.	0	0

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891231-K8S1H2

Printed On: 8/9/2022 6:48:35 AM



Sales Code	Std/ Opt	Description	\$ List	Weight
		Includes Speedometer, Tachometer, Primary Air Pressure, Secondary Air Pressure, Fuel Level #1, DEF Level, DPF Filter Status, Fuel Economy, Oil Pressure, Coolant Temp, OAT and Voltmeter, and Air Application.		
8282108	O	Modular Dash Options: RH Dash storage unit with two shelves. Reduces total gauge count; HD by 6 and MD by 4.	46	0
8282120	O	USB Charging Port - Dash Panel *Requires 15" Digital Display 8282027/8282028	0	0
8300008	S	Interior color: Slate Gray	0	0
8330102	S	Interior package: Vantage daycab Includes durable headliner and vinyl sidewalls with geometric patterned trim and anodized aluminum accents throughout. Convenient overhead storage cubbies, full size glove box, two center console cupholders, and large door pad map pocket. Standard LH/RH power windows, electric door locks, interior LED lighting, nighttime-friendly red ambient lighting for dash and footwell, and door mounted courtesy light. Includes two standard 12V power outlets. Driver sunvisor includes strap.	0	0
8390634	S	Rubber floormat	0	0
8410272	O	Driver Seat: GT702 HB with DuraCloth material. The GT702 is standard with a single air bag, scissor linkage seat suspension that incorporates seat height memory, auto-leveling valves with exit air dump, and adjustable damper. It includes a dual chamber lumbar support, 10in Fore/Aft adjustment, 5in Up/Down adjustment with protection zones, 2.5in pan extension, 51 degree seat back recline, and 16 degree full seat tilt. Includes 3-point matching seat belts. DR seat standard w/ dual armrests.	329	10
8460272	O	Rider Seat: GT702 HB with DuraCloth material. The GT702 is standard with a single air bag, scissor linkage seat suspension that incorporates seat height memory, auto-leveling valves with exit air dump, and adjustable damper. It includes a dual chamber lumbar support, 10in Fore/Aft adjustment, 5in Up/Down adjustment with protection zones, 2.5in pan extension, 51 degree seat back recline, and 16 degree full seat tilt. Includes 3-point matching seat belts. Rider seat standard w/ LH armrest.	600	44
8490187	O	Seat Color: Gray	0	0
8601432	O	Kenworth Radio DEA710 AM/FM/WB/USB, Bluetooth	37	0
8698974	S	Base Level Audio System - Daycab:High Performance Door Speakers.	0	0
8699926	O	CB installation kit: Center mounted of header. W/header mounted quick release CB mount. One red power post & one black ground post. Includes dual antenna leads located on the mirror brackets. Includes dual antenna & separate speaker.	289	2
8700196	O	Turn Signal: Self-Cancelling	17	0
8700283	S	LH and RH Trip Ledge Rain Deflectors	0	0

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891231-K8S1H2

Printed On: 8/9/2022 6:48:35 AM



Sales Code	Std/Opt	Description	\$ List	Weight
8700663	S	Kenworth TruckTech+ The Kenworth Remote Diagnostics system provides the Worlds Best reporting of engine and aftertreatment fault codes, as well as enhanced support for the truck owner through rapid communication of fault severity and recommended actions. This option is Standard on all Heavy Duty Kenworths with a PACCAR MX engine, Cummins X15 engine, PX engine or Natural Gas engine. Optional on Medium Duty Kenworths.	0	0
8800260	O	Long grabhandle RH side mounted to side-of-cab exhaust.	66	2
8800262	O	Long grabhandle LH side mounted to side-of-cab exhaust.	66	2
8800402	S	Dual Cab Interior Grabhandles: A Pillar Mounted Dash Wrap and B Pillar Mounted Grabhandles	0	0
8832113	S	Kenworth Daylite Door with standard LH/RH electric door locks and LH/RH electric window controls.	0	0
8841618	O	Dual rectangular air horn 23 in. LH & RH top of roof. Includes air horn covers.	246	4
8850139	S	Look-Down, Pass. Door, Black 11x6	0	0
8865002	S	Aero Mirror: Dual Kenworth Aerodynamic Motorized heated mirrors, 7in X 13in with cab color mirror shell and black mirror arms. Also includes LH/RH heated 6in X 7in convex mirrors. Mirror brackets set for 8-1/2 ft load width. Mirror controls located on driver side door pad.	0	0
8871446	S	Rear cab stationary window 19in x 36in	0	0
8890038	O	3.5in x 11.5in Plastic Records Holder:Mounted On Rear Cab Panel. Not available With Sleeper Or 2 Person Bench Seat.	64	0
8890101	S	One-piece bonded-in windshield with curved glass. Standard.	0	0
8890135	S	Exterior stainless steel sunvisor.	906	19
8890359	O	Delete Wheelwell Fender Extension	-291	-4
8890876	S	Kenworth Cab/Sleeper Air Suspension.	0	0
Lights & Instruments				
9010553	S	Headlamps: SAE Dual Halogen Complex Reflector	0	0
9022137	S	Marker Lights: Five, rectangular, LED	0	0
9030016	S	Turn Signal Lights: Flush mounted LED. Mounted at top of fender wheel arc.	0	0
9030052	S	LED Stop,Turn,Tail: With Two LED Backup Lights and With An LED License Plate.	0	0
9058085	O	SW/WIRE/IND LT: C/I FLOOD 1ST SW THRU GROMMET UNDER CAB	136	0
9080206	O	Switch and Wiring:Cust. Installed Beacon Lights	240	1

Price Level: January 1, 2022

100% Complete

Date: August 09, 2022

Deal: MAS MML ALM ACCA FAC

Quote Number: QUO-891231-K8S1H2

Printed On: 8/9/2022 6:48:35 AM



Sales Code	Std/Opt	Description	\$ List	Weight
		With Additional 20ft Jumper Harness Shipped Loose		
9090027	O	Headlamps to turn on when wipers are active.	0	0
9090039	S	Marker Lights: Interrupter Switch. Included in Turn Signal For All Models Except T3. The T3 Switch Is In The Dash.	0	0
9090052	O	Brake Lights on when Engine Brake Active. Can only be selected when chassis also has engine brake. Cannot be used with options to delete engine brake.	0	0
9090126	O	Electric Backup Alarm: Meets SAE J994 & OSHA requirements.	167	4
9090849	O	Polyswitches replacing fuses. Switch will automatically reset after removal of excess load.	49	0
Air Equipment				
9101219	O	Air Dryer: Bendix AD-HF Extended Purge Heated With Puraguard	132	0
9108001	S	Moisture ejection valve w/ pull cable drain.	0	0
9110071	O	Tractor kit: Center frame-mounted w/ hosetenna. Includes composite gladhand/light plug holder. Kit includes dash mounted trailer air supply valve, trailer hand control valve, and hoses/fittings for the valves. Dash mounted parking brake valve and tractor protection valve are standard. Air lines are detachable at one end only, light lines are detachable at both ends. Conspicuity components are standard.	1,197	24
9121043	O	Phillips 15ft coiled light line w/ metal plugs & 6 in. lead. Must code for tractor kit.	72	4
9121115	O	Coiled air & light lines replacing straight lines Included in tractor kit. 15ft working length.	80	2
9140020	S	Nylon air tubing in frame & cab, excluding hoses subject to excessive heat or flexing.	0	0
9140328	O	Trailer ABS electric supply through SAE J560 7-pin connector per TMC RP137).	0	0
9140702	O	Optional Hosetenna Bracket Location 2ft BOC/sleeper. Hosetenna bracket will be located plus or minus six inches from any non-standard location requested	15	0
Extended Warranty				
9200006	O	Base Warranty - PACCAR MX-11 & MX-13 Engine 24 months / 250,000 miles / 400,000 km / 6250 hours.	0	0
9200021	S	Base Warranty - Standard Service Heavy Duty 12 months / 100,000 miles / 160,000 km.	0	0
9212601	S	24 Month TruckTech+ Subscription for PACCAR MX Engines w/ OTA Functionality	0	0
9220001	O	Base Warranty: Emissions 5YR/100K MI - EPA Engine (Does not include CARB Clean Idle sticker)	0	0
Miscellaneous				



Sales Code	Std/Opt	Description	\$ List	Weight
9409852	O	GHG Secondary Manufacturer: Does Not Apply	0	0
9490206	O	Warning triangle reflector kit: Shipped loose. Kit consists of 3 triangles in plastic carrying case. Not floor mounted.	48	4
9490404	O	One 5 lb. dry chemical type fire extinguisher mounted outboard of driver seat. Class ABC.	149	11
9491659	S	VMUX Architecture	0	0
Promotions				
9510687	U	TC555 2H 2021 SALES PROGRAM <i>Narr TC555 2H 2021 SALES PROGRAM</i>	0	0
Paint				
9700000	O	Paint color number(s). N9702 A - L0006 WHITE N9720 FRAME N0001 BLACK	0	0
9943004	O	Bumper Unpainted	0	0
9943048	O	Day Cab Bulk Paint	0	0
9943050	O	Day Cab Standard Paint	0	0
9944820	S	1 - Color Paint - Day Cab Color will be White if no other color is specified.	0	0
9965510	S	Base coat/clear coat. The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0	0

Order Comments

Total List Price (W/O Freight & Warranty & Surcharges)	\$256,276
Marketing and Service Support Fee	\$940
Prepaid Freight	\$2,825
Total Surcharge/Options Not Subject To Discount	\$0
Total Weight	17,656

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in CRM.

Price Level: January 1, 2022
Deal: MAS MML ALM ACCA FAC
Printed On: 8/9/2022 6:48:35 AM

100% Complete

Date: August 09, 2022
Quote Number: QUO-891231-K8S1H2



PRICING DISCLAIMER

While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information



Shipping Destinations


Intermediate Destination:

Final Destinations	Quantity
--------------------	----------



Every™ Coverage.

North American Truck Coverages
For 2017 X15™ And ISX12 Engines.

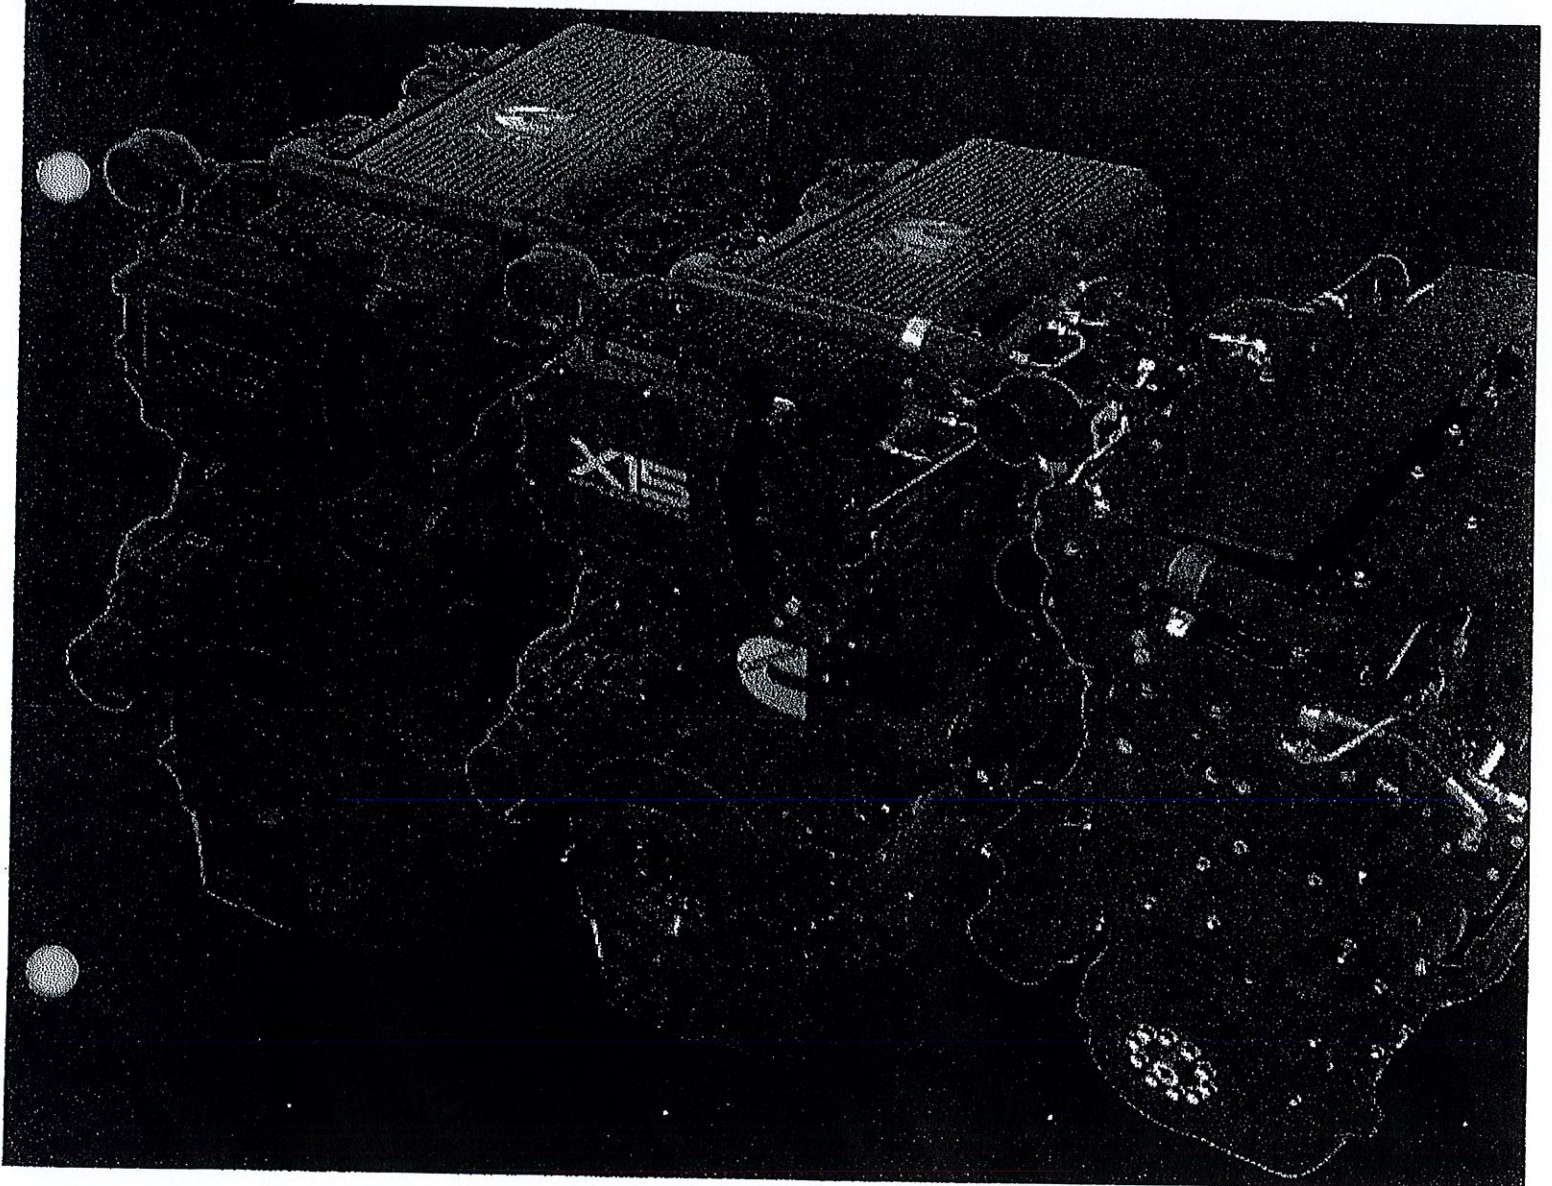

Protection Plan 2

Provides you with coverage against major repair expenses down the road, no matter where those roads take you. Options range from 3 to 7 years and 250,000 to 500,000 miles (402,336-804,672 km). Mileage range options may vary by engine and length of coverage. Contact your local distributor for details on your specific engine.

Items covered under Protection Plan 2 include:

- Internal components and major engine systems, including the water pump, which is new for EPA/GHG 2017
- Registered parts and labor on covered failures
- Travel or towing when an engine is disabled by a warrantable failure is covered when you purchase Plan 2 coverage with the travel option

Aftertreatment Extended Coverage*



Extended coverage is also available for your Single Module™ or Cummins Aftertreatment System. Options range from 3 to 5 years and 100,000 to 500,000 miles (160,934-804,672 km). Mileage range options may vary by engine and length of coverage. Contact your local distributor for details on your specific engine.

The coverage includes Cummins-supplied aftertreatment components, including:

- Diesel Oxidation Catalyst (DOC), Diesel Particulate Filter (DPF) and SCR assemblies
- Hydrocarbon dosing system
- Diesel Exhaust Fluid (DEF) dosing system
- Ammonia sensor

*Protection Plan 1 EPA 2017 of equal duration is required prior to the purchase of the Aftertreatment Extended Coverage.

Major Components Coverage.

Cummins Major Components Coverage is the most important travel insurance you can buy, as it protects you against unexpected expenses stemming from issues involving major repairs. Advance planning with Major Components Coverage provides additional peace of mind, with options ranging from 5 to 7 years and 500,000 to 700,000 miles (804,672-1,126,541 km). Mileage range options may vary by engine and length of coverage. Contact your local distributor for details on your specific engine.

Major Components Coverage includes:

- Registered parts and labor on covered failures, including the water pump, which is new for EPA/GHG 2017
- Major castings and forgings





Leave Every Detail To Us.



For complete coverage details, including pricing, contact your local Cummins distributor or OEM dealer.

Ordering Cummins Extended Coverage is easy. Your local Cummins distributor or dealer can handle it for you when you buy your new X15- or ISX12-powered truck, and include it in your financing, or you can buy it separately later on for up to 18 months after your engine purchase*.


If you experience a service need during the coverage period, call Cummins Care toll-free at 1-800-CUMMINS™ (1-800-286-6467). Our Cummins Care representatives are standing by, every hour of every day, and they will check with nearby authorized Cummins distributors and dealers to locate a facility with an available technician and the right diagnostic tools to handle your equipment repair. Your Cummins representative will help get you to the nearest available location – with 3,500 authorized locations, there's sure to be one close by.

Simply show the servicing distributor/dealer your Extended Coverage certificate, and he or she will handle all the necessary paperwork and repairs to get you back on the road as quickly as possible.

*After 12 months, a small administrative fee may be applied.

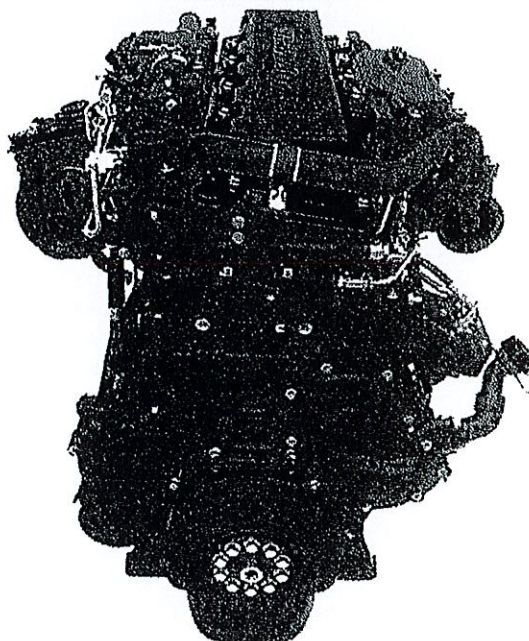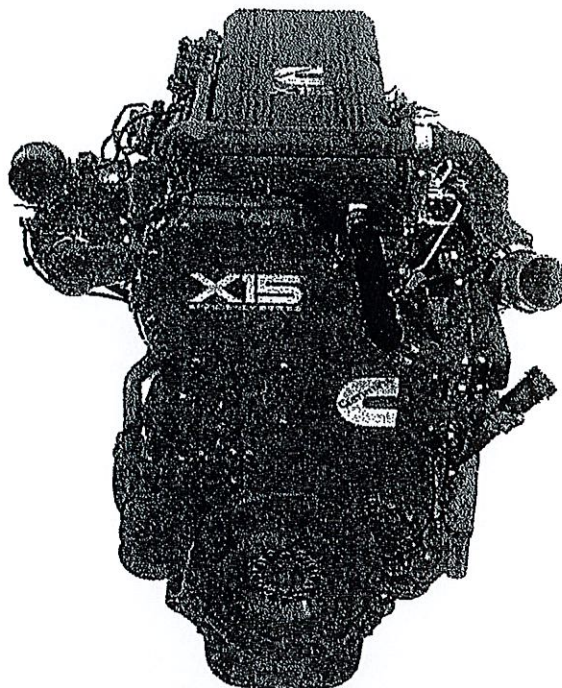

Construction

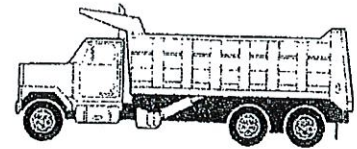

	Trailers w/ Approved Semi-Fluid Lubricant (Note 2)	5 years / 500,000 miles (800,000 km)
Tire Inflation and Monitor System (TIMS)	All Models	3 years / 300,000 miles (480,000 km)
SmartWave Tire Pressure Monitoring System (TPMS)	All Models	3 years / Unlimited Mileage
Tire Pressure Control System (TPCS)	All Models	1 year / Unlimited Mileage
Transmissions	Models: 7, 9, 10 Speeds (Note 1) 1100-1800 lbs. ft. 8600/8700 Series (Model exceptions shown below) [Excludes Fuller UltraShift LST (DM)]	3 years / Unlimited Mileage
	Multispeed: 13, 15, 18, 8LL, MLL, 9ALL (Notes 1, 4) (Excludes Fuller UltraShift LHP)	3 years / Unlimited Mileage
	UltraShift PLUS VCS, VMS, VXP (Note 1)	3 years / Unlimited Mileage
	FS Series, RT-6609A (Notes 5, 8)	2 years / Unlimited Mileage
	Hybrid: EH-8E306A-UPG, EH-8E306A-UP (Notes 1)	3 years / 150,000 miles (240,000 km)
Oil-to-Water Heat Exchangers	All Models (Note 1)	3 years / Unlimited Mileage
Auxiliary Transmission	Models: AT-1202, 2A-92	1 year / Unlimited Mileage
Bendix VORAD Collision Warning System	EVT-200 Series EVT-300 Series (Note 12)	See Bendix Warranty Web Site
	VS-400 Series (Note 12)	See Bendix Warranty Web Site
	Retrofit Units (All Series) (Note 12)	See Bendix Warranty Web Site

Note 1: All transmission models require the use of a Roadranger approved lubricant. Automated transmissions and transmissions with Purchased Extended Protection Plans must use Roadranger Synthetic Lubricant meeting Eaton PS 164 Rev7 specification (Refer to Lubrication Manual, TCMT0021.) All transmission and clutch models must meet and have Eaton Engineering Application Approval prior to sale to qualify for any warranty coverage, and then be operated in the approved applications. Those that do not will void their warranty. No blanket approvals are available at this time for UltraShift PLUS models and Hybrid Systems.

Note 2: Requires Roadranger approved OEM installation procedures and lubes.

Note 3: With Approved Synthetic Lube, Without Approved Synthetic Lube, Warranty = 3 years/300,000 miles (480,000 km).

Note 4: Refer to "Extended Protection Plan Matrix" on www.roadranger.com

Note 5: 1 year/Unlimited for Snow Plows in FS Series.

Note 7: Driver controlled wheel differential lock options carry the same warranty as single reduction models.

Note 8: FS Series synchronizer wear coverage (synchronizers with Eaton Friction Material) is only available for transmissions that use Eaton approved synthetic lubricant in conjunction with either a Solo Adjustment Free or a 365 MM Clutch (Transmission Robust Package). Without stated package requirements, synchronizer wear is not covered.

Note 11: Use of non-genuine Dana Axle Housing Breather will void warranty for pinion, input, and output seals.

Note 12: Please refer to the Bendix web site (<http://www.bendix.com/en-us/service/Pages/Warranty.aspx>) for the most current policy in effect. Bendix Commercial Vehicle Systems LLC and Bendix Spicer Foundation Brake LLC reserves the right to make policy changes at anytime. The Bendix SmartWave and VORAD trademarks are registered or owned by Bendix Commercial Vehicle Systems LLC.

Heavy-Duty UltraShift® PLUS V Series Transmission and Clutch

Vocation	Approved Models	Transmission Torque	Component	Standard Warranty (Yr/Mi:000) ³	Additional Coverage Years/Miles (000)					
					Option 1	Price USD	Option 2	Price USD	Option 3	Price USD
Linehaul	VAS	1750 lbs.ft. and below	Transmission	5/750 (1200km)	N/A	N/A	N/A	N/A	N/A	N/A
		1850 lbs.ft. and above	Transmission							
		All	Clutch							
	VCS/VHP/VMS/VXP	1750 lbs.ft. and below	Transmission	3/350 (563km)	1/100 (160km)	\$300	2/150 (401km)	\$500	N/A	N/A
		1850 lbs.ft. and above	Transmission							
		All	Clutch							
Standard Duty Construction, Pick up & Delivery ¹ , Transit Coach, Recreational Vehicle, Fire Service, Rescue Vehicle	VAS ¹ /VCS/VHP/VMS/VXP	1750 lbs.ft. and below	Transmission	3/U	1/U	2/U	\$1000	N/A	N/A	
		1850 lbs.ft. and above	Transmission							
		All	Clutch							
Severe Duty Off-Highway, Agriculture, Heavy Haul ² , Logging, Mining, Oil Field, Refuse	VAS/VCS/VHP/VMS/VXP	1750 lbs.ft. and below	Transmission	2/U	1/U	2/U	\$1300	3/U	\$1800	
		1850 lbs.ft. and above	Transmission							
		All	Clutch							

Notes: 1 VAS Pick up & Delivery standard warranty is 5 years/750,000 miles. Extended warranty not available. 2 Heavyhaul application available for VXP and VHP models only. 3 "U" denotes "Unlimited" mileage.

Heavy-Duty UltraShift® PLUS M Series Transmission and Clutch

Vocation	Approved Models	Transmission Torque	Component	Standard Warranty (Yr/Mi:000) ³	Additional Coverage Years/Miles (000)					
					Option 1	Price USD	Option 2	Price USD	Option 3	Price USD
Linehaul	MHP/MXP	1750 lbs.ft. and below	Transmission	5/500 (800km)	0/100 (160km)	\$350	0/250 (400km)	\$600	N/A	N/A
		1850 lbs.ft. and above	Transmission							
		All	Clutch							
Standard Duty Construction ¹ , Pick up & Delivery, Transit Coach, Recreational Vehicle	MHP/MXP	1750 lbs.ft. and below	Transmission	3/U	1/U	2/U	\$1200	N/A	N/A	
		1850 lbs.ft. and above	Transmission							
		All	Clutch							
Severe Duty Off-Highway, Agriculture, Heavy Haul ² , Logging, Mining, Oil Field, Refuse	MHP/MXP	1750 lbs.ft. and below	Transmission	2/U	1/U	2/U	\$1750	3/U	\$2450	
		1850 lbs.ft. and above	Transmission							
		All	Clutch							

Notes: 1 Construction application not available for MHP models. 2 Only Heavyhaul application available for MHP models. 3 "U" denotes "Unlimited" mileage.

Heavy-Duty UltraShift® PLUS L Series Transmission and Clutch

Vocation	Approved Models	Transmission Torque	Component	Standard Warranty (Yr/Mi:000) ³	Additional Coverage Years/Miles (000)			
					Option 1	Price USD	Option 2	Price USD
Linehaul	LAS	1750 lbs.ft. and below	Transmission	5/750 (1200km)	N/A	N/A	N/A	N/A
		1850 lbs.ft. and above	Transmission					
		All	Clutch					
Standard Duty Pick up & Delivery	LAS	1750 lbs.ft. and below	Transmission	5/750 (1200km)	N/A	N/A	N/A	N/A
		1850 lbs.ft. and above	Transmission					
		All	Clutch					
Standard Duty Recreational Vehicle, Transit Coach	LAS	1750 lbs.ft. and below	Transmission	3/350 (800km)	1/100 (160km)	\$300	2/150 (241km)	\$500
		1850 lbs.ft. and above	Transmission					
		All	Clutch					

Notes: 1 "U" denotes "Unlimited" mileage.

Pricing applies for Protection Plans sold in the first year in service. An additional premium is required for Protection Plans sold within the 2nd and 3rd year of vehicle service. Plans must be purchased before the end of the standard warranty period. Premium Pricing: 2nd year \$100 USD; 3rd year \$300 USD. Canadian orders will be invoiced in CAD based on prevailing exchange rate. For the most current CAD pricing, go to www.roadrangerwarranty.com.

* All coverage subject to meeting Eaton application requirements. All extended coverage requires use of Roadranger or Roadranger "Approved" lubricants.
 ** Externally mounted heat exchangers coverage limited to standard warranty or 3 years/300,000 miles (480,000 km) maximum. Extended protection does not apply.
 *** Coverage/pricing valid for US/Canada only.

ENGINES



EXTENDED WARRANTY PLANS

MX-11

6000 HP / 4300 RPM / 11.0L

MX-13

6000 HP / 4300 RPM / 13.0L

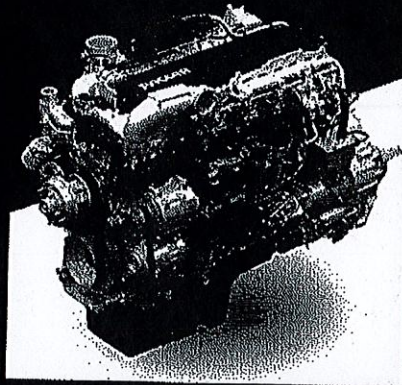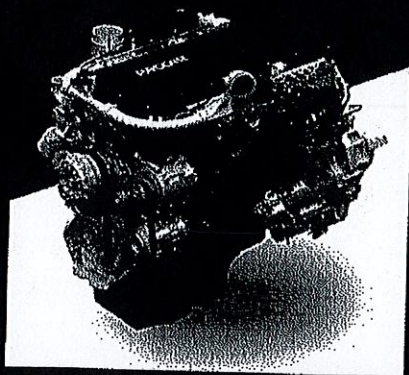

PACCAR offers a wide selection of Extended Warranty Plans for PACCAR Engines to meet your business and application needs. A PACCAR Extended Warranty Plan delivers peace of mind by providing coverage for key engine components for up to seven years beyond the standard warranty coverage.

PACCAR POWERTRAIN



Company ID Number: 466450

THE E-VERIFY PROGRAM FOR EMPLOYMENT VERIFICATION
MEMORANDUM OF UNDERSTANDING

ARTICLE I

PURPOSE AND AUTHORITY

This Memorandum of Understanding (MOU) sets forth the points of agreement between the Department of Homeland Security (DHS) and Kenworth of Birmingham, Inc. (Employer) regarding the Employer's participation in the Employment Eligibility Verification Program (E-Verify). This MOU explains certain features of the E-Verify program and enumerates specific responsibilities of DHS, the Social Security Administration (SSA), and the Employer. E-Verify is a program that electronically confirms an employee's eligibility to work in the United States after completion of the Employment Eligibility Verification Form (Form I-9). For covered government contractors, E-Verify is used to verify the employment eligibility of all newly hired employees and all existing employees assigned to Federal contracts or to verify the entire workforce if the contractor so chooses.

Authority for the E-Verify program is found in Title IV, Subtitle A, of the Illegal Immigration Reform and Immigrant Responsibility Act of 1996 (IIRIRA), Pub. L. 104-208, 110 Stat. 3009, as amended (8 U.S.C. § 1324a note). Authority for use of the E-Verify program by Federal contractors and subcontractors covered by the terms of Subpart 22.18, "Employment Eligibility Verification", of the Federal Acquisition Regulation (FAR) (hereinafter referred to in this MOU as a "Federal contractor with the FAR E-Verify clause") to verify the employment eligibility of certain employees working on Federal contracts is also found in Subpart 22.18 and in Executive Order 12989, as amended.

ARTICLE II

FUNCTIONS TO BE PERFORMED

A. RESPONSIBILITIES OF SSA

1. SSA agrees to provide the Employer with available information that allows the Employer to confirm the accuracy of Social Security Numbers provided by all employees verified under this MOU and the employment authorization of U.S. citizens.
2. SSA agrees to provide to the Employer appropriate assistance with operational problems that may arise during the Employer's participation in the E-Verify program. SSA agrees to provide the Employer with names, titles, addresses, and telephone numbers of SSA representatives to be contacted during the E-Verify process.
3. SSA agrees to safeguard the information provided by the Employer through the E-Verify program procedures, and to limit access to such information, as is appropriate by law, to individuals responsible for the verification of Social Security Numbers and for evaluation of the E-Verify program or such other persons or entities who may be authorized by SSA as governed



Company ID Number: 466450

Nationality Act (INA) and Federal criminal laws, and to administer Federal contracting requirements.

7. DHS agrees to provide a means of automated verification that is designed (in conjunction with SSA verification procedures) to provide confirmation or tentative nonconfirmation of employees' employment eligibility within 3 Federal Government work days of the initial inquiry.

8. DHS agrees to provide a means of secondary verification (including updating DHS records as may be necessary) for employees who contest DHS tentative nonconfirmations and photo non-match tentative nonconfirmations that is designed to provide final confirmation or nonconfirmation of the employees' employment eligibility within 10 Federal Government work days of the date of referral to DHS, unless DHS determines that more than 10 days may be necessary. In such cases, DHS will provide additional verification instructions.

C. RESPONSIBILITIES OF THE EMPLOYER

1. The Employer agrees to display the notices supplied by DHS in a prominent place that is clearly visible to prospective employees and all employees who are to be verified through the system.
2. The Employer agrees to provide to the SSA and DHS the names, titles, addresses, and telephone numbers of the Employer representatives to be contacted regarding E-Verify.
3. The Employer agrees to become familiar with and comply with the most recent version of the E-Verify User Manual.
4. The Employer agrees that any Employer Representative who will perform employment verification queries will complete the E-Verify Tutorial before that individual initiates any queries.
 - A. The Employer agrees that all Employer representatives will take the refresher tutorials initiated by the E-Verify program as a condition of continued use of E-Verify.
 - B. Failure to complete a refresher tutorial will prevent the Employer from continued use of the program.
5. The Employer agrees to comply with current Form I-9 procedures, with two exceptions:
 - If an employee presents a "List B" identity document, the Employer agrees to only accept "List B" documents that contain a photo. (List B documents identified in 8 C.F.R. § 274a.2(b)(1)(B)) can be presented during the Form I-9 process to establish identity.) If an employee objects to the photo requirement for religious reasons, the Employer should contact E-Verify at 888-464-4218.
 - If an employee presents a DHS Form I-551 (Permanent Resident Card) or Form I-766 (Employment Authorization Document) to complete the Form I-9, the Employer agrees to make a photocopy of the document and to retain the photocopy with the employee's Form I-9. The photocopy must be of sufficient quality to allow for verification of the photo

E-Verify



Company ID Number: 466450

uses the E-Verify system for any purpose other than as authorized by this MOU, the Employer may be subject to appropriate legal action and termination of its access to SSA and DHS information pursuant to this MOU.

9. The Employer agrees to follow appropriate procedures (see Article III, below) regarding tentative nonconfirmations, including notifying employees in private of the finding and providing them written notice of the findings, providing written referral instructions to employees, allowing employees to contest the finding, and not taking adverse action against employees if they choose to contest the finding. Further, when employees contest a tentative nonconfirmation based upon a photo non-match, the Employer is required to take affirmative steps (see Article III.B. below) to contact DHS with information necessary to resolve the challenge.

10. The Employer agrees not to take any adverse action against an employee based upon the employee's perceived employment eligibility status while SSA or DHS is processing the verification request unless the Employer obtains knowledge (as defined in 8 C.F.R. § 274a.1(l)) that the employee is not work authorized. The Employer understands that an initial inability of the SSA or DHS automated verification system to verify work authorization, a tentative nonconfirmation, a case in continuance (indicating the need for additional time for the government to resolve a case), or the finding of a photo non-match, does not establish, and should not be interpreted as evidence, that the employee is not work authorized. In any of the cases listed above, the employee must be provided a full and fair opportunity to contest the finding, and if he or she does so, the employee may not be terminated or suffer any adverse employment consequences based upon the employee's perceived employment eligibility status (including denying, reducing, or extending work hours, delaying or preventing training, requiring an employee to work in poorer conditions, refusing to assign the employee to a Federal contract or other assignment, or otherwise subjecting an employee to any assumption that he or she is unauthorized to work) until and unless secondary verification by SSA or DHS has been completed and a final nonconfirmation has been issued. If the employee does not choose to contest a tentative nonconfirmation or a photo non-match or if a secondary verification is completed and a final nonconfirmation is issued, then the Employer can find the employee is not work authorized and terminate the employee's employment. Employers or employees with questions about a final nonconfirmation may call E-Verify at 1-888-464-4218 or OSC at 1-800-255-8155 or 1-800-237-2515 (TDD).

11. The Employer agrees to comply with Title VII of the Civil Rights Act of 1964 and section 274B of the INA, as applicable, by not discriminating unlawfully against any individual in hiring, firing, or recruitment or referral practices because of his or her national origin or, in the case of a protected individual as defined in section 274B(a)(3) of the INA, because of his or her citizenship status. The Employer understands that such illegal practices can include selective verification or use of E-Verify except as provided in part D below, or discharging or refusing to hire employees because they appear or sound "foreign" or have received tentative nonconfirmations. The Employer further understands that any violation of the unfair immigration-related employment practices provisions in section 274B of the INA could subject the Employer to civil penalties, back pay awards, and other sanctions, and violations of Title VII could subject the Employer to back pay awards, compensatory and punitive damages. Violations of either section 274B of the INA or Title VII may also lead to the termination of its participation in E-

E-Verify



Company ID Number: 466450

whether or not assigned to the contract. Once the Employer begins verifying new hires, such verification of new hires must be initiated within 3 business days after the date of hire. Once enrolled in E-Verify as a Federal contractor with the FAR E-Verify clause, the Employer must initiate verification of employees assigned to the contract within 90 calendar days from the time of enrollment in the system and after the date and selecting which employees will be verified in E-Verify or within 30 days of an employee's assignment to the contract, whichever date is later.

d. Employers that are already enrolled in E-Verify at the time of a contract award but are not enrolled in the system as a Federal contractor with the FAR E-Verify clause: Employers enrolled in E-Verify for 90 days or more at the time of a contract award must use E-Verify to initiate verification of employment eligibility for new hires of the Employer who are working in the United States, whether or not assigned to the contract, within 3 business days after the date of hire. Employers enrolled in E-Verify as other than a Federal contractor with the FAR E-Verify clause, must update E-Verify to indicate that they are a Federal contractor with the FAR E-Verify clause within 30 days after assignment to the contract. If the Employer is enrolled in E-Verify for 90 calendar days or less at the time of contract award, the Employer must, within 90 days of enrollment, begin to use E-Verify to initiate verification of new hires of the contractor who are working in the United States, whether or not assigned to the contract. Such verification of new hires must be initiated within 3 business days after the date of hire. An Employer enrolled as a Federal contractor with the FAR E-Verify clause in E-Verify must initiate verification of each employee assigned to the contract within 90 calendar days after date of contract award or within 30 days after assignment to the contract, whichever is later.

e. Institutions of higher education, State, local and tribal governments and sureties: Federal contractors with the FAR E-Verify clause that are institutions of higher education (as defined at 20 U.S.C. 1001(a)), State or local governments, governments of Federally recognized Indian tribes, or sureties performing under a takeover agreement entered into with a Federal agency pursuant to a performance bond may choose to only verify new and existing employees assigned to the Federal contract. Such Federal contractors with the FAR E-Verify clause may, however, elect to verify all new hires, and/or all existing employees hired after November 6, 1986. The provisions of Article II.D, paragraphs 1.a and 1.b of this MOU providing timeframes for initiating employment verification of employees assigned to a contract apply to such institutions of higher education, State, local and tribal governments, and sureties.

f. Verification of all employees: Upon enrollment, Employers who are Federal contractors with the FAR E-Verify clause may elect to verify employment eligibility of all existing employees working in the United States who were hired after November 6, 1986, instead of verifying only new employees and those existing employees assigned to a covered Federal contract. After enrollment, Employers must elect to do so only in the manner designated by DHS and initiate E-Verify verification of all existing employees within 180 days after the election.

g. Form I-9 procedures for existing employees of Federal contractors with the FAR E-Verify clause: Federal contractors with the FAR E-Verify clause may choose to complete new Forms I-9 for all existing employees other than those that are completely exempt from this process. Federal contractors with the FAR E-Verify clause may also update previously completed Forms I-9 to initiate E-Verify verification of existing employees who are not completely exempt as long as that Form I-9 is complete (including the SSN), complies with

E-Verify



Company ID Number: 466450

determines that more than 10 days is necessary. The Employer agrees to check the E-Verify system regularly for case updates.

4. The Employer agrees not to ask the employee to obtain a printout from the Social Security Number database (the Numident) or other written verification of the Social Security Number from the SSA.

B. REFERRAL TO DHS

1. If the Employer receives a tentative nonconfirmation issued by DHS, the Employer must print the tentative nonconfirmation notice as directed by the E-Verify system and provide it to the employee so that the employee may determine whether he or she will contest the tentative nonconfirmation. The Employer must review the tentative nonconfirmation with the employee in private.

2. If the Employer finds a photo non-match for an employee who provides a document for which the automated system has transmitted a photo, the employer must print the photo non-match tentative nonconfirmation notice as directed by the automated system and provide it to the employee so that the employee may determine whether he or she will contest the finding. The Employer must review the tentative nonconfirmation with the employee in private.

3. The Employer agrees to refer individuals to DHS only when the employee chooses to contest a tentative nonconfirmation received from DHS automated verification process or when the Employer issues a tentative nonconfirmation based upon a photo non-match. The Employer will determine whether the employee contests the tentative nonconfirmation as soon as possible after the Employer receives it.

4. If the employee contests a tentative nonconfirmation issued by DHS, the Employer will provide the employee with a referral letter and instruct the employee to contact DHS through its toll-free hotline (as found on the referral letter) within 8 Federal Government work days.

5. If the employee contests a tentative nonconfirmation based upon a photo non-match, the Employer will provide the employee with a referral letter to DHS. DHS will electronically transmit the result of the referral to the Employer within 10 Federal Government work days of the referral unless it determines that more than 10 days is necessary. The Employer agrees to check the E-Verify system regularly for case updates.

6. The Employer agrees that if an employee contests a tentative nonconfirmation based upon a photo non-match, the Employer will send a copy of the employee's Form I-551 or Form I-766 to DHS for review by:

- Scanning and uploading the document, or
- Sending a photocopy of the document by an express mail account (paid for at employer expense).

7. If the Employer determines that there is a photo non-match when comparing the photocopied List B document described in Article II.C.5 with the image generated in E-Verify, the Employer must forward the employee's documentation to DHS using one of the means described in the preceding paragraph, and allow DHS to resolve the case.

E-Verify



Company ID Number: 466450

D. Nothing in this MOU is intended, or should be construed, to create any right or benefit, substantive or procedural, enforceable at law by any third party against the United States, its agencies, officers, or employees, or against the Employer, its agents, officers, or employees.

E. Each party shall be solely responsible for defending any claim or action against it arising out of or related to E-Verify or this MOU, whether civil or criminal, and for any liability wherefrom, including (but not limited to) any dispute between the Employer and any other person or entity regarding the applicability of Section 403(d) of IIRIRA to any action taken or allegedly taken by the Employer.

F. The Employer understands that the fact of its participation in E-Verify is not confidential information and may be disclosed as authorized or required by law and DHS or SSA policy, including but not limited to, Congressional oversight, E-Verify publicity and media inquiries, determinations of compliance with Federal contractual requirements, and responses to inquiries under the Freedom of Information Act (FOIA).

G. The foregoing constitutes the full agreement on this subject between DHS and the Employer.

H. The individuals whose signatures appear below represent that they are authorized to enter into this MOU on behalf of the Employer and DHS respectively.