

BID SUBMITTAL FORM
Alabama County Joint Bidding Program
BID ITEM – HEAVY DUTY DUMP CHASSIS OPTION C

Company Name: Truckworx Kenworth

Address: 2220 Finley Blvd, Birmingham, AL

Bid Submitted by: Amanda Hanks
(Name of company representative)

Title: Director of Government Affairs E-mail address: amandah@truckworx.com

Phone: 601.331.2725 Fax: _____

By submitting this bid, we agree: Initials

That the equipment model number identified below meets the bid specs for this bid item ACH

That the bid price will be honored for all counties for the period from **January 1, 2026** to **June 30, 2026**. **However, the deadline for order will be March 31st, 2026* ACH

That the equipment will be delivered at the bid price to all counties participating in the joint bid program ACH

That the company representative listed above will be the contact person for purchasing this bid item under the joint bid program ACH

That the bid is accompanied by a current catalog or model specification document for the model number identified below ACH

That the bid is accompanied by a copy of the manufacturer's standard warranty as required in the bid specifications ACH

That the bid includes the E-Verify documentation required by Alabama law ACH

We comply with, and if awarded the contract, we will comply with, the requirements of Section 41-16-50 and Sections 41-16-160 to -166, Code of Alabama 1975. ACH

That, if awarded the bid, a performance bond will be provided upon request ACH

That an option sheet with individual pricing is attached ACH

ADDENDUM: Due to OEM production constraints (Allison Transmission) ACCA members will be limited to 51 build slots on this years contract. Orders will be first come, first serve.

Total Bid Price including options: \$ 192,850.00

Equipment Model #: T880S (set forward axle), T880

Description: Heavy Duty Dump Chassis, Option C

Signature of company representative submitting bid: Amanda Hanks

Title: Director of Government Affairs

A handwritten signature in black ink, appearing to read "Amanda Hanks".

OPTION COST SHEET FOR HEAVY DUTY DUMP TRUCK CHASSIS OPTION C

<u>Options</u>	<u>Option Price</u>
Allison World 4500-RDS-6 six speed Automatic Transmission w/ 4.56 Rear Axle Ratio in place of 10 speed manual w/ 4.10 Rear Axle Ratio <small>18 speed Automated Manual Transmission w/ 4.30 Rear Axle Ratio</small>	\$ <u>\$9,500.00</u>
Dual Exhaust in place of standard single exhaust	\$ <u>standard</u>
Outside Aluminum wheels (6) on lift axle and rear axles in place of steel wheels	\$ <u>standard</u>
425/65R22.5 Front Tires in place of 385/65R22.5 radials Bridgestone, Goodyear, or Yokohama	\$ <u>standard</u>
Factory installed 23k lb. capacity non-steerable lift axle with Bendix LQ-5 Valve and dash mounted controls (flip valve, pressure regulator, & air pressure gauge) and (4) 295/75R22.5 virgin rubber 14 ply highway tread radial tires by Bridgestone, Goodyear, or Yokohama with (4) 22.5 x 8.25 steel disc wheels. 1yr/100k mile Factory warranty included.	\$ <u>\$4,500.00</u>
Full truck kit/pintle hook prep package: includes tractor protection valve and gladhands ran To end of frame for safe trailer operation	\$ <u>standard</u>
15 L engine, 4.78 rear axle ratio, & straight bright finish bumper in place of 13L engine	\$ <u>\$9,500.00</u>
7" Wide polished stainless steel tank straps with polished aluminum fuel tank	\$ <u>standard</u>

NOTE: Award will be made on the basis of the total cost of the truck with all options included. However, a county may, at its discretion, deduct one or more of the above-referenced options from the truck, and in such event, the cost of the option as stated on the bid shall be deducted from the total cost of the truck. There shall be no other deductions and no additions made to the truck by the purchasing county or by the vendor.

Equipment Model #: [T880S \(set forward axle\), T880](#)

Description: [Heavy Duty Dump Chassis, Option C](#)

Signature of company representative submitting bid: [Amanda Hanks](#) 

Title: [Director of Government Affairs](#)

BID SPECIFICATIONS FOR HEAVY DUTY DUMP TRUCK CHASSIS - OPTION C

GENERAL

These specifications shall be construed as the minimum acceptable standards for a heavy-duty dump truck chassis. Should the manufacturer's current published data or specifications exceed these standards, the manufacturer's standards shall be considered minimum and shall be furnished. All integral parts not specifically mentioned in the scope of these specifications that are necessary to provide a complete working unit shall be furnished. Additionally, the machine offered for bid shall include all standard manufacturers' equipment.

The use of specific names or numbers in the specifications is not intended to restrict the bidder or any seller or manufacturer, but is intended solely for the purpose of indicating the type, size, and quality of equipment considered best adapted to the uses of counties participating in this joint bid.

Note all units offered for bid must be of manufacturer's current production model and must be fully compliant with EPA standard US10 without the use of EPA engine credits. Chassis should be equipped with the appropriate diesel particulate filter and SCR after treatment system.

BID SUBMITTAL FORM

Each bidder must submit his or her bid on the Bid Submittal Form included in the invitation to bid package. All written warranties to be submitted shall be attached to the Bid Submittal Form.

BID PRICE

The price bid shall include all destination charges, delivery charges, title fees, rebates and all other applicable costs and refunds.

REPLACEMENT PARTS AVAILABILITY

Parts must be available for 5 years or 500,000 miles of use for the piece of equipment bid.

WARRANTY

Bidders shall submit a copy of the manufacturer's standard warranty along with a complete explanation of the warranty with their bid. Warranty must be transferable. Warranty must include the following minimum coverage:

Basic Vehicle: 1 Year or 100,000 miles

Diesel Engine: 2 year or 250,000 miles. However, counties will have the option to purchase additional coverage (an extended warranty) if negotiated between the purchasing county and successful bidder within the first 9 months of truck purchase.

Transmission: 3 Year or 300,000 miles

Yes No

Rear Carriers: 3 Year or 300,000 miles

Page# _____ /Attachment _____

ASSEMBLY AND DELIVERY

The truck chassis will be purchased for use with a 16' dump body and optional body equipment that is to be bid separate and apart from the truck chassis. The dump body company will be responsible for assembly and installation of the dump body and related optional equipment, including the cost of the same. The selling truck chassis dealer will be responsible for delivery of the chassis to the dump Body Company for installation and for delivery of the complete dump truck unit to the county following installation and assembly of the dump body and related options onto the truck chassis. Freight to the Dump Body Company will be included in the truck bidder's proposal. Dump body installation and assembly costs will be included in the dump body bidder's proposal. Dump Body Bidder is responsible for Freight back to the Truck Bidder after Dump Body installation.

DOT INSPECTION AND SAFETY EQUIPMENT

Prior to delivery each unit shall be DOT inspected and include the appropriate documentation and decal. In addition, each unit shall be equipped with the required fire extinguisher and reflective triangle kit.

ENGINE AND RELATED COMPONENTS

Shall be an in line 6 design 13 liter minimum, turbo charged diesel engine capable of developing 500HP minimum with a maximum governed RPM of 1800 or more and a minimum peak torque rating of 1,850FT Lbs.

Yes No _____
Page # 2

Engine shall have full wet replaceable cylinder liners. Fuel injection system to be equipped with a unit pump or unit injector style with CARB idle reduction.

Yes No _____
Page # 2

Air intake system shall have a single dry element with a restriction indicator.

Yes No _____
Page # 2

Engine cooling system to have a minimum 1,330 square inches of frontal area, aluminum core radiator with silicone hoses throughout and coolant protection to -34 degrees F.

Yes No _____
Page # 3

Fan drive to be Horton two speed type

Yes No _____
Page # 3

Single vertical Exhaust. Cab Mounted for clear back of cab with stainless steel heat shield, steel elbow and chromed turn out stack.

Yes No _____
Page # 3

Diesel Particulate Filter and SCR catalyst to be mounted under passenger door.

Yes No _____
Page # 7

Factory installed integral Engine Brake.

Yes No _____
Page # 2

Engine electronics to include shutdown capabilities for critical engine functions:

Yes No _____
Page # 3

STARTING AND ELECTRICAL SYSTEM

12-Volt system fuse/circuit breaker protected

Yes No _____
Page # 4 _____

12V gear reduction starter, 12V 160-amp alternator **Brushless**

Yes No _____
Page # 4 _____

(3) 12V maintenance free group 31 batteries with 700 cold cranking amps each. Batteries to be mounted in a single metal box with fiberglass cover RH side behind cab.

Yes No _____
Page # 4 _____

TRANSMISSION AND DRIVELINE

Eaton Fuller Ultrashift Plus 8LL transmission. Requires **1650 torque** engine and optimized Rear axle ratio (4.10 or 4.30 depending on engine selection) *Endurant XD-Pro 18 Speed *Requires 1850 torque

Yes No _____
Page # 4 _____

Transmission should have oil cooler with dash mounted temperature gauge, left and right-side PTO access gears with appropriate clearance.

Yes No _____
Page # 4 _____

Eaton Advantage easy pedal manually adjusting 15.5" two plate ceramic clutch 7 springs, 6 paddle design with AIR assist feature and remote lube fittings for clutch release bearing and both crosses mounted on LH frame rail under hood.

*Not applicable with Endurant XD-Pro 18 Speed Transmission

Yes N/A No _____
Page # _____

Main drivelines Spicer 1810HD with coated splines/ inter axle 1810

with coated splines or Equivalent.*Main drivelines Spicer SPL250XL with coated splines/inter axle SPL170XL with coated splines or equivalent

Yes No _____
Page # 4 _____

CAB EXTERIOR

Cab to be Class 8 design for construction and vocational applications. **Aluminum** and composite construction for corrosion resistance. Huck bolted or Henrob fastened construction. Minimum width 1.9 meters. Minimum bumper to back of cab = 122.5".

*2.1 meters minimum width

Yes No _____
Page # 8 _____

Drop style side windows for improved driver's downward visibility.

Yes No _____
Page # 8 _____

Rear of engine may not extend into cab. No doghouse in firewall is allowed.

Yes No _____
Page # 8 _____

Cab mounting should be air suspended at rear on at least 1 air bags.

Yes No _____
Page # 8 _____

Cab should feature:

Dual air horns in addition to the standard electric signal horn

Yes No _____
Page # 11 _____

LED marker lights

Yes No
Page # 11

Cab mounted heated mirrors with convex mirrors mounted directly below heated mirrors.

Yes No
Page # 11

Stainless steel exterior sun visor

Yes No
Page # 11

Hood is to be a full tilting composite design to include woven aluminum mesh grill

Yes No
Page # 3

Rubber fender extensions for wider base front tires.

Yes No
Page # 11

Cab and hood paint color to be selected from manufacturer's standard non-metallic paint chart

Yes No
Page # 13

CAB INTERIOR

Cab interior to include the following:

Storage tray on back wall of cab and in overhead console

Yes No
Page # 10

Cab interior is to be mid-grade level fully groomed with headliner, back wall and windshield pillar post and door panels covered

Yes No
Page # 10

Cab should have interior sun visors on both sides of cab.

Yes No
Page # 10

Dash features to include:

Black appearance with chrome gauge surrounds

Yes No
Page # 10

Center mount console with cup holders

Yes No
Page # 9

Full adjusting tilt and telescopic steering column

Yes No
Page # 9

Multifunction Driver Display to include the following:

- Average and real time fuel economy
- RPM display
- Ignition timer
- Trip information
- Truck information
- Onboard diagnostics
- Air Filter Restriction gauge, Engine oil temperature gauge, dual rear axle temperature gauges (2), Fuel filter restriction gauge, and Manifold pressure gauge.
- Gauges to be individual replaceable gauges (no automotive type clusters)

Yes No
Page # [9/10](#)

Cab seats should be: Driver High Back air ride design with dual arm rests

Yes No
Page # [10](#)

Passenger seat to be fixed design with dual arm rests storage area underneath seat with lid.

Yes No
Page # [10](#)

Both seats to have fabric covering with required lap and shoulder belts.

Yes No
Page # [10](#)

Factory installed integral heater/air conditioning (HVAC) with R134A refrigerant and rotary type air conditioner compressor. HVAC unit to be firewall mounted to allow for easier access to components.

Yes No
Page # [3](#)

AM/FM and Bluetooth radio with clock, USB port, and weather band, two-way radio Power leads with mounting plate installed in overhead console with dual mirror mounted antennas.

Yes No
Page # [10](#)

One additional dash mounted power outlet to be furnished.

Yes No
Page # [10](#)

Windshield wipers to be two (2) speed electric with washer and intermittent feature. Wiper motor and linkage to be mounted external of the cab on firewall for easier access.

Yes No
Page # [10](#)

AIR BRAKES

Brake system to be full dual antilock air design with heated extended purge air dryer.

Yes No
Page # [5](#)

Naturally aspirated air compressor should have 18.7 CFM capacity and increased air reservoir capacity for the local installation of a pusher style third axle. Yes No
Page # 15

System to include either a steering column or dash mounted valve for rear service brakes. Yes No
Page # 9

FRAME/BUMPER/FUEL TANKS

Steel 120,000 PSI steel frame rails 10.75" x 3.50" x 0.375" with a section modulus of 27.33 and a RBM per rail of 3,280,000 including full steel insert. Yes No
Page # 7

Minimum 209" wheelbase with a **135"** cab to axle and a **195"** load platform.
***214"** minimum wheelbase with a **140"** cab to axle Yes No
Page # 1

Front bumper Bright Finish steel swept back channel design with center mount cast tow pin. Yes No
Page # 8

Fuel tank(s) to be aluminum with a minimum of **110**-gallon capacity. Yes No
Page # 8

FRONT AXLE

20,000 LB Meritor MFS20 or Equivalent suspension and shock absorbers. Threaded spring hanger pins and bushings replacing rubber bushings. Yes No
Page # 4

20,000# integral power steering with dual steering boxes and oil cooler Yes No
Page # 5

Unitized sealed (maintenance free) front wheel hubs. Yes No
Page # 5

Sealed tapered kingpins and bearings. Yes No
Page # 5

Meritor "S" cam design or Equivalent 16.5" x 6" brakes
***Bendix** Yes No
Page # 5

Front wheels to be Aluminum disc ten (10) hole bud style, hub piloted 22.5" x 12.25". Yes No
Page # 6

Front tires to be 18 ply 385/65R22.5 radials Bridgestone, Goodyear, or Yokohama.
***425/65R22.5 Michelin, and Continental** Yes No
Page # 6

REAR AXLE

Dual Meritor RT46-164PEH 46,000# capacity tandem rear axle or Equivalent with heavy wall housing and integral lube pump (4.10 ratio). 46,000# Chalmers 854-46-H suspension with standard restrictor can. No multi leaf springs and walking beam design allowed.

Yes No
Page # 5

In cab Power divider lock out valve with warning light and buzzer.

Yes No
Page # 5

Driver controlled inter wheel differential locks for both rear axles with manual valve and warning light.

Yes No
Page # 6

Meritor "S" cam design or Equivalent 16.5" x 7" brakes
[*Bendix](#)

Yes No
Page # 6

Automatic brake slack adjusters

Yes No
Page # 5

Brake chambers shall be (4) 30/30 style chambers with raised chambers on rear axle.

Yes No
Page # 5

Steel disc ten- (10) hole bud style, hub piloted 24.5 x 8.25 rear wheels.
[*Polished Aluminum](#)

Yes No
Page # 5

Rear tires to be 14 ply 11R 24.5 traction radials Bridgestone, Goodyear, or Yokohama.
[*Michelin](#)

Yes No
Page # 6

OPTIONS

In addition to the above options related to the tri-axle or heavy-duty dump truck chassis, the bid must also include the cost for each of the following options, itemized separately on the bid:

Allison World 4500-RDS-6 six speed Automatic Transmission w/ 4.56

Yes No
Page #

Rear Axle Ratio in place of 10 speed manual w/ 4.10 Rear Axle Ratio

[*Endurant XD-Pro 18 Speed w/ 4.30 Rear Axle Ratio](#)

Dual Exhaust in place of standard single exhaust

Yes No
Page #

Outside Aluminum wheels (6) on lift axle and rear axles in place of steel wheels

Yes No
Page #

425/65R22.5 Front Tires in place of 385/65R22.5 radials Bridgestone, Goodyear, or Yokohama

Yes No
Page # _____

Factory installed 23k lb. capacity non-steerable lift axle with Bendix LQ-5 Valve and dash mounted controls (flip valve, pressure regulator, & air pressure gauge) and (4) 295/75R22.5 virgin rubber 14 ply highway tread radial tires by Bridgestone, Goodyear, Or Yokohama with (4) 22.5 x 8.25 steel disc wheels. 1yr/100k mile Factory warranty included. *Michelin

Yes No
Page # _____

Full truck kit/pintle hook prep package: includes tractor protection valve and gladhands ran to end of frame for safe trailer operation.

Yes No
Page # _____

15 L engine with 4.78 rear axle ratio, & straight bright finish bumper in place of 13L engine

Yes No
Page # _____

7" Wide polished stainless steel tank straps with polished aluminum fuel tank

Yes No
Page # _____

NOTE: Award will be made on the basis of the total cost of the truck chassis with all options included. However, a county may, at its discretion, deduct the above-referenced option from the truck chassis, and in such event, the cost of the option as stated on the bid shall be deducted from the total cost of the truck chassis. There shall be no other deductions and no additions made to the truck chassis by the purchasing county or by the vendor.



TRUCKWORX KENWORTH - BIRMINGHAM (K415)
2220 FINLEY BOULEVARD
BIRMINGHAM, Alabama 35234

Amanda Hanks
Cell Phone: 601-331-2725
Office Phone: 601-939-5300
Email: amandah@truckworx.com

Vehicle Summary

	Unit		Chassis
Model:	T880 Series	Conventional	Fr Axle Load (lbs): 20000
Type:		FULL TRUCK	Rr Axle Load (lbs): 46000
Description 1:			G.C.W. (lbs): 88501
Description 2:		T880 Series	
		Conventional	
	Application		Road Conditions:
Intended Serv.:	Construction: Vehicles used in the cons		Class A (Highway) 97
Commodity:	Gravel/Crushed	Rock/Sand	Class B (Hwy/Mtn) 2
			Class C (Off-Hwy) 1
			Class D (Off-Road) 0
	Body		Maximum Grade: 6
Type:		End Dump	Wheelbase (in): 214
Length (ft):		16	Overhang (in): 90
Height (ft):		10	Fr Axle to BOC (in): 74
Max Laden Weight (lbs):		88500	
	Trailer		Cab to Axle (in): 140
No. of Trailer Axles:		0	Cab to EOF (in): 230
Type:			Overall Comb. Length (in): 352.5
Length (ft):		0	
Height (ft):		0	Special Req.
Kingpin Inset (in):		0	U.S. Domestic Registry, 50-state.
Corner Radius (in):		0	

Restrictions

Length (ft):	65
Width (in):	102
Height (ft):	13.5

Approved by:

Date:

11/13/25

Note: All sales are F.O.B. designated plant of manufacture.

Price Level: August 1, 2025

100% Complete

Date: November 06, 2025

Deal:

Printed On: 11/13/2025 1:46:24 PM

Quote Number: QUO-1140090-Y5D1S7

**KENWORTH**

Sales Code	Std/ Opt	Description	Weight
Model			
0000810	S	T880 Series Conventional	15,549
0070060	S	T880	0
0072000	O	Chassis Operation Will Not Incl. Stationary application. Stationary operation is defined as running the engine under load while stationary at a substantial fraction of engine gross horsepower (60% or greater) for an extended period of time (longer than 5 - 10 minutes).	0
0080101	O	CARB Low NOX Omnibus Registration Guidelines Dealer/Customer acknowledges that this vehicle is NOT intended for registration or domicile/primary use in the State of California.	0
0080310	O	EPA Clean Idle Label - Cummins Engines	0
0090000	S	Non-Sleeper w/ Rear Axle Capacity less than 59K.	0
0098401	O	State of Registry: Alabama	0
Engine & Equipment			
0130357	O	Cummins X15 500V 500@1900 1850@900, 2024 with Intebrake, Productivity Series N09420 C333 0.....Reserve Speed Limit Offset (N09380 C334 0.....Maximum Cycle Distance (C334 N09360 C400 252...Reserve Speed Function Reset N09200 C399 100...Standard Maximum Speed Limit N09400 C401 10....Maximum Active Distance (C40 N09220 C402 0.....Expiration Distance (C402) N09540 C395 0.....Expiration Distance (C395) N09260 C121 68....Maximum Accelerator Pedal Ve N09440 C234 YES...Engine Protection Shutdown (N09460 C231 NO....Gear Down Protection (C231) N09580 C133 5.....Timer Setting (C133) N09680 C233 NO....Idle Shutdown Manual Overrul N09480 C132 1400..Max PTO Speed (C132) N09300 C128 68....Maximum Cruise Speed (C128) N09500 C239 NO....Cruise Control Auto Resume (N09520 C238 NO....Auto Engine Brake in Cruise N09240 C209 100...Hard Maximum Speed Limit (C2 N09780 C190 80....High Ambient Temperature Thr N09740 C188 40....Low Ambient Temperature Thre N09760 C189 60....Intermediate Ambient Tempera N09720 C382 YES...Enable Hot Ambient Automatic N09600 C396 YES...Enable Impending Shutdown Wa N09620 C397 60....Timer For Impending Shutdown N09640 C206 35....Engine Load Threshold (C206) N09560 C225 YES...Enable Idle Shutdown Park Br	470
1000046	O	EPA Emissions Warranty Engine	0

Price Level: August 1, 2025

100% Complete

Date: November 06, 2025

Deal:

Printed On: 11/13/2025 1:46:24 PM

Quote Number: QUO-1140090-Y5D1S7



KENWORTH

Sales Code	Std/ Opt	Description	Weight
1000151	S	PremierSpec	0
1000243	O	Gearing Analysis: Performance power before economy results.	0
1000255	O	Customer's Typical Operating Spd: 68 MPH	0
1000344	O	EWI Tracking - A2 Engine Module Chassis	0
1000525		RegistrationYear Year of Registration: 2025	0
1000684	O	Effective VSL Setting NA	0
1000858	O	Engine Idle Shutdown Timer Disabled	0
1000891	O	Eff EIST NA Expiration Miles Use only with MX and Cummins engines	0
1002070	O	Air Compressor: Cummins 37.4 CFM *For C500 Twin Steer use 1002075	15
1051200	S	Air Cleaner: Composite Firewall Mounted PACCAR or Cummins Engines	0
1099080	O	Pre-Cleaner Mounted in the Hood Plenum	0
1105220	O	Fan Hub: Horton 2-Speed for X15/X15N	0
1123555	S	Cooling module: 1330 square inches. Includes aluminum radiator core, aluminum charge air cooler, translucent surge tank and washer bottle, silicone hoses, and extended life coolant.	0
1160208	O	Bug Screen: Between Hood & Grille	2
1247251	O	EXH: Single Can 2024 RH Under with Dual Side-of-Cab Tailpipes	86
1290436	O	Tailpipe: 7 in. dual 36 in. 45 degree curved.	8
1292944	O	Dual Lower Chrome Exhaust Elbow	0
1321125	O	Fuel Filter:Davco 382 Fuel/Water Separator	8
1321220	O	Run Aid:Cummins TRV for Davco only *For Fuel Filter, X15 AND 2.1 m models	2
1321300	O	Start Aid:None *For Fuel Filter	0
1500029	O	Kenworth Fuel Cooler Required for Cummins engines with a single fuel tank. Required for PACCAR MX-13 engine with a single fuel tank and stationary use: High RPM, low vehicle speed, sustained for longer than 1 hour. Optional for all other applications.	6
1504005	O	Immersion Block Heater 120V 1500W W/ Plug Under	2

Price Level: August 1, 2025

100% Complete

Date: November 06, 2025

Deal:

Printed On: 11/13/2025 1:46:24 PM

Quote Number: QUO-1140090-Y5D1S7



KENWORTH

Sales Code	Std/ Opt	Description	Weight
		Door on C500, T660, T800 & W900.	
1812162	O	Alternator: 160 amp Brushless with battery voltage sense. *This code replaced 1812160.	9
1821210	S	Batteries: 3 PACCAR GP31 Threaded Post (700-730) 2100-2190 CCA dual purpose.	0
1836103	O	PACCAR Premium 12V Starter W/ Cummins X15 Engines PACCAR 12 volt electrical system. With centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system with circuit protection circuits number & color coded.	0
1840065	S	12V Low Voltage Disconnect for Battery Protection	0
1900996	O	Jump Start Terminals Under Hood.	12
1901017	S	Remote PTO/Throttle, 12-Pin, Engine Bay Remote Control Provision	0
Transmission & Clutch			
2050007	U	Neutral Coast Mode Disabled	0
2058786	O	Eaton EXDP-18F118D Endurant XD Pro 18 Speed 1850 LB FT, with Hill Start Aid and provisions for rear and bottom mounted PTO.	0
2240211	O	Clutch: 430mm Self-Adjust, High Capacity Organic, Max Torque 2050 ft-lbs	0
2406453	O	Driveline: 2 Dana SPL250XL 1 Centerbearing Low maintenance offering from Spicer. On-highway 350K mi first service interval, 100K mi subsequent service interval on U-joint, splines lubed for life, quick disconnect end caps.	98
2410708	O	Performance Shift Calibration	0
2429351	O	First Transmission PTO Compatibility - Chelsea 230/236/238/442/489/660/680-V3 or Muncie CS8/SH8/TG8S-P1 bottom mounted 6 or 8-Bolt PTO's for all Eaton & PACCAR transmissions. This application includes use of the standard hydraulic clutch actuator on Eaton FR & RT transmissions and supports bottom mounted 6 and 8-Bolt PTO's with single acting air actuation.	0
2429358	O	Rear Transmission Support Springs for transmission PTO applications are required to ensure that engine flywheel housings are not overloaded when transmission PTO's are installed.	0
2429361	O	First Customer Installed Eaton/PACCAR Trans PTO.	0
2460054	O	Additional KW Oil to Water Transmission Cooler For use with Endurant XD/PACCAR TX-18 Transmissions	10
2493009	O	Aluminum Clutch Housing	0
Front Axle & Equipment			
2506181	O	Dana Spicer D2000 Front Axle rated 20K standard track.	-57

Price Level: August 1, 2025

100% Complete

Date: November 06, 2025

Deal:

Printed On: 11/13/2025 1:46:24 PM

Quote Number: QUO-1140090-Y5D1S7

**KENWORTH**

Sales Code	Std/ Opt	Description	Weight
2621078	U	Front Brakes: 22K Bendix ES S-Cam 16.5x6 in.	-46
2690025	O	Splined Rotor for Front Air Disc Brakes for Use with Iron Hubs.	0
2702020	O	Front Hubs Iron Hub Pilot 20,000 lbs. 10 Bolt 16.5x6in. or 7in. or air disc brakes. 10 Bolt, 11-1/4 in. bolt circle. Consider Wheelguards (5850002) with aluminum wheels.	80
2741970	S	ConMet PreSet Plus Hub Package; Front Axle.	0
2750001	S	Hubcap: Front Vented.	0
2769000	S	Slack Adjusters Included W/ Front Axle or Brakes. Also use with disc brakes.	0
2866020	S	Front Springs: Taperleaf 20K W/ Shock Absorbers w/ maintenance-free elastomer spring pin bushings. Standard with rubber pins except for C500 which has threaded pins. Not available on W900L. W900B use 2866021.	0
2893642	S	Dual Power Steering Gear: 16-22K TRW THP60	0
2899336	S	Power Steering Cooler:Radiator Mounted Air-to-Oil	0
2900020	O	Front Frame Raised: 1/2 in.	0
2900616	O	Threaded Bushings for Taperleaf Spring 16K, 18/20K, 22K, 40K replacing rubber.	0

Rear Axle & Equipment

3144183	O	Dual Dana Spicer D46-172HP Rear Axle rated at 46K. w/ 16mm housing and 2.06in. shaft diameter. Includes pump. Tandem rear axles.	-156
3200430	O	Rear Axle Ratio - 4.30.	0
3334004	O	Dual Rear Brakes 16-1/2x7 in. to 46K; Bendix ES-extended service S-cam.	-40
3392005	O	Dual Rear Brake Drums: Cast. For use with 16.5X7" or 16.5X8.625" brake.	208
3407050	S	Dual Rear Hubs: Aluminum Hub Pilot 46K; 11.25" bolt circle. Requires "R" series outer ends.	0
3441972	S	ConMet PreSet Plus Hub Package; Dual Rear Axle.	0
3465002	O	Tandem Rear Axle Automatic Slack Adjusters. For use with drum brakes.	0
3485209	O	Spring Brake: 3030 High Output Dual. For drum brakes.	0
3495228	O	Bendix 4S/4M Anti-Lock Brake System W/ Air traction control (ATC).	2
3500006	O	Inverted Chambers for 16-1/2 x 7 in. Brakes; Replaces standard mount w/ higher mount.	0
3500057	O	Interaxle Driveline: 1 Dana SPL170XL	8

Price Level: August 1, 2025

100% Complete

Date: November 06, 2025

Deal:

Quote Number: QUO-1140090-Y5D1S7

Printed On: 11/13/2025 1:46:24 PM

**KENWORTH**

Sales Code	Std/ Opt	Description	Weight
		Tandem Rear Axles Only	
3532194	O	Wheel Differential Lock for Dana Spicer Axles D40-170(P)/D46-170(H)(P)(WT) forward rear axle & rear rear axle.	112
3573111	O	Separate Switch for Dual Axles: differential lock or crosslock.	0
3749209	O	Rear suspension: Tandem Chalmers 854-46-H 46K. 54 in. axle spacing. Unladen Height: 12.5 in. Laden Height: 10.1 in. Standard restrictor can.	226
3808025	O	Non-Steerable Pusher Axle: Watson Chalin AL2200 23K Standard track.	2,296
3820348	O	16.5x7 in. Bendix Non-RSD Brakes for Use With 21K or 23K non-steerable pusher assembly (included w/ axle).	0
3820698	O	Cast Brake Drums 16.5x7 for Non-Steerable 21K or 23K pusher axle.	0
3821703	O	Non-Steerable Pusher Hubs Iron Hub Pilot 10-Hole 11.25 in. bolt circle for use with 21K or 23K axle.	30
3828339	O	Pusher or Tag: Gauge/ Switch Dash-Mounted; Gauge and pressure regulator mounted left of driver.	0
3828401	O	Pusher: Gauge Digital Display Single Pusher 1	0
3829025	U	SPECIAL DRILLING: ADDL HOLES/ Narr SPECIAL DRILLING: ADDL HOLES/SPECIAL DRILLING: ADDL HOLES SPECIAL DRILLING: ADDL HOLES SPECIAL DRIL	0
3830145	O	Delete Standard Heavy-Duty Air Springs for Rear suspension.	-28
3832026	O	Chalmers Shock Absorbers. 52K and Under suspension.	35
3841054	O	1st Pusher Location: 54 in. From C/I Forward tandem axle or single rear axle.	0

Tires & Wheels

4010120	U	Front tires: Michelin XZE 425/65R22.5 20PR	-11
4210151	O	Rear Tires: Michelin X Works D 11R24.5 16PR	320
4783199	U	1 Non-Steerable Pusher: 4 Michelin XZE2 11R22.5	20
4900008	O	Rear Tire Quantity: 8	0
5045216	O	Front Wheel: Alcoa 82362 22.5x12.25 aluminum, with Lv One [TM] finish High Polish, hub-pilot mount. 11400lb. maximum rating. Super single. Standard track axles may be over 102 in. w/425 tires. Air disc brake compatible.	-10
5245275	O	Rear Wheel: Alcoa 98U63 24.5X8.25 AL Ultra One High Polish Wheel.	-136
5783505	O	Non-Steerable Pusher: Alcoa 88067 22.5x8.25 4-4 MagnaForce aluminum alloy, hub-pilot mount. 7400 lb maximum rating. Air disc brake compatible. High polish.	-102
5900008	O	Rear Wheel/Rim Quantity: 8	0

Price Level: August 1, 2025

100% Complete

Date: November 06, 2025

Deal:

Quote Number: QUO-1140090-Y5D1S7

Printed On: 11/13/2025 1:46:24 PM

**KENWORTH**

Sales Code	Std/ Opt	Description	Weight
Frame & Equipment			
6056600	O	Frame Rails: 10-3/4 x 3-1/2 x 3/8in. Steel 337in. to 416 in. Truck frame weight is 3.48 lb.-in. per pair of rails. Section modulus is 17.80, RBM is 2,132,000 in-lbs per rail. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	435
6141400	O	Full Steel Insert: for 10-5/8 in. or 10-3/4 in. Steel 285 in. to 336 in. or 2nd insert for 11-5/8 in. steel frame. Adds 1,149,000 in-lb to main rail RBM. Truck insert weight is 2.05 lb.-in. per pair of rails. Full frame insert length is equal to wheelbase plus rear frame cutoff plus dimension forward of front axle by model. See databook addendum section 7.2.	667
6302461	O	Bumper: Tapered Chrome Steel Channel. Requires a bumper setting code.	63
6319485	S	48.5 in. Bumper Setting. Requires a Bumper Code.	0
6324025	O	Front Tow Hook: Center Mounted, Cast. Requires iron front drive brackets.	28
6391201	O	Custom Frame Layout: One Chassis CFL F/A: CFL IDENTICAL TO 130288 CFL C/M: MOVE REARMOST XMBR FAR ENOUGH BACK SO THAT FWD MOST BOLT HOLES ARE PAST THE REAR MOST RADIUS OF RR TIRES CFL A/D: MOUNT A/D INSIDE LH RAIL ON DROP BRACKET CFL A/T: NO AIR TANKS AFT OF RR DRIVE AXLE; NO AIR TANKS LH & RH SIDE OF TRANS; 2 A/T'S UNDER BBOX OK CFL BBX: NO ADDL HOLES IN CUTOFF AREA; CUTOFF TO BE MODIFIED. CFL DEF: DRILL AT LEAST 10 HOLES IN EACH SIDE OF THE PUSHER MOUNTING BRACKETS CFL FT/T: PLEASE EVENLY SPACE ALL FUEL TANK SUPPORT STRAPS	0
6397001	O	Huck Bolts Throughout Frame, where Possible.	0
6401235	O	Steel Cantilever Battery Box BOC W/ Smooth polished aluminum cover. Vocational Style.	39
6409902	O	Battery Box Location: RH Side.	15
6410010	O	Frame Access Grabhandle(s) LH Mounted. Placement and quantity of grabhandles may vary due to FMCSR frame access requirements.	2
6410092	O	Frame Access Grabhandle Horizontal Mounted at midpoint of sleeper or Daycab.	2
6414008	O	Deckplate: minimum coverage (1 foot)	6
6451090	S	C5, T6, T8 diamond plate cover and black end plates with access step for right hand under DPF/SCR or CNG. For T8, use extended length non-polished battery box on opposite rail to match the length of under cab components. End plates will be painted standard black frame color.	0

Price Level: August 1, 2025

100% Complete

Date: November 06, 2025

Deal:

Printed On: 11/13/2025 1:46:24 PM

Quote Number: QUO-1140090-Y5D1S7

**KENWORTH**

Sales Code	Std/ Opt	Description	Weight
6490440	O	Heavy-Duty BOC Crossmember Assembly.	23
6679824	O	Width Across Front Tires Exceeds 102 inches. Dealer to review delivery constraints w/transporter.	0
6679860	O	Final End-of-Frame Cut-Off Dimension Will be modified to 61 in. to 65 in.	0
6721102	S	Rear Mudflap Arms: Betts B-25 Standard-Duty, straight. Includes B1732 mounting brackets as standard.	0
6722000	S	Rear Mudflap Shields: White Plastic Antisail W/ Kenworth logo.	0
6742009	S	Square End-of-Frame W/O Crossmember; Non-Towing.	0

Fuel Tanks & Equip

7210110	O	Fuel Tank: 110 US Gallon 24.5 in. Aluminum Under replace. Class 8 fuel tanks w/o locking caps include an anti-siphon device on the filler neck.	2
7722153	S	Small Round DEF Tank, 14 Gallons. The DEF tank will be located on the side you specified. If you have specific configuration or body builder concerns, please utilize the Custom Frame Layout option. Standard capacity is calculated by fuel capacity of the vehicle and will accommodate two diesel fill-ups for every DEF fill-up. For 1:1 DEF fuel fill ratio, add 7889204.	0
7821100	O	Heavy-Duty 7 in. Steel Supports/ Straps for One 24.5 in tank. Two supports per tank.	18
7839400	O	Extended Steps on Fuel Tank LH Under for Access; 2 steps, 1 tank.	2
7840015	O	Polish Only One Aluminum Tank.	0
7840038	O	Polished Cover for 1 DEF Tank Any Size.	3
7889081	O	Polish Only 7 in. Stainless Steel Straps for One 24.5in. tank; 2 straps per tank.	0
7889203	S	DEF to Fuel Fill Ratio 2:1 or Greater.	0
7889245	S	Anti-Siphon Device in Fuel Tank Filler Neck. For any number of fuel tanks.	0
7889604	S	DEF Tank Location is LH.	0
7920110	O	Location: 110 gal fuel tank LH under cab.	0

Cab & Equipment

8025301	S	Cab: Stamped Aluminum Cab with Panoramic Curved glass windshield. Standard with stamped aluminum doors, heavy duty in-swinging hinges, and triple sealed doors. Manufactured using self-piercing rivets and structural adhesive. Includes LED exterior marker lights and turn signals.	0
8090604	O	Hood: T880 Set-Back Medium Length. 122.6 inch BBC W/Std Bumper.	15
8098212	O	Bright Engine Air Intake	0

Price Level: August 1, 2025

100% Complete

Date: November 06, 2025

Deal:

Printed On: 11/13/2025 1:46:24 PM

Quote Number: QUO-1140090-Y5D1S7



KENWORTH

Sales Code	Std/ Opt	Description	Weight
		Chrome Trimmed Engine Air Intake on Both Sides of Hood	
8108002	O	Fine Particulate Filter for Cabin Air HVAC system. To provide extra filtration in high dust applications. Cabin airflow is reduced with this additional filter. *Cannot be used with code 8108003.	0
8108011	S	Cab HVAC - Day Cab and 40 in. Sleeper System With Defrost, A/C, and 48,000 BTU/hr Heater. Includes automatic temperature control with one touch defrost operation and dash mounted cab temperature and solar intensity sensors. Pleated fresh air filter and cabin recirculation air filter standard. The Kenworth HVAC system is designed to provide optimal heating and cooling in all operating environments without need for additional insulation. Cab HVAC without sleeper heater AC is available with 40in sleeper.	0
8201043	O	Kenworth Smartwheel: 18 in. Leather Wrapped With Integrated Radio and Cruise Controls.	2
8201052	S	Column Mtd TMSN Control W/Retarder Cntrl, RH Side Use with Automated and Automated Manual Transmissions Only	0
8201200	S	Adjustable Telescoping Tilt Steering Column.	0
8203196	O	Dash Mounted Compact Trailer Brake Valve. Self Returning.	0
8203199	U	WRG: C/I CAB PANEL LTS UNDER THE CAB Narr WRG: C/I CAB PANEL LTS UNDER THE CAB WRG: C/I CAB PANEL LTS UNDER THE CAB WRG: C/I CAB PANEL LTS UNDER	0
8205012	O	Off-Highway Dash Switch: For ABS System. Includes indicator light.	0
8205103	O	Information for Customer-Installed PTO Chelsea 8-bolt.	0
8205164	O	Dash Switch: 1st Single-Acting Eaton or PACCAR Mounted PTO. Electric switch, wiring, software, air solenoids, and plumbing are factory-installed to control the 1st Eaton (single-acting) trans PTO.	0
8205228	O	One (1) Spare Accessory Electric-Over-Air Switch with Latching Air Solenoid. Mounted on dash for customer-installed option. Latching means the output air pressure will remain on, while there is air remaining in the air tank, when the ignition is off and switch position is on. Not intended for Trailer Lift Axle controls, see 8208607 and 8208608.	0
8205280	O	Dash Switch: Rock Free Mode for PCAR TX-18 Pro, TX-12 Pro and Endurant XD Pro	0
8208495	O	Two Spare Switches: Wired to Power.	0
8221160	O	Gauge: Engine Oil Temperature Gauge With Integral warning light. The NavPlus HD unit includes a virtual engine oil temperature gauge.	0
8222404	S	Gauge: DD Virtual Gauge - Oil Temp Engine	0
8222409	S	Gauge: DD Virtual Gauge - Air Filter Restriction	0

Price Level: August 1, 2025

100% Complete

Date: November 06, 2025

Deal:

Printed On: 11/13/2025 1:46:24 PM

Quote Number: QUO-1140090-Y5D1S7



KENWORTH

Sales Code	Std/ Opt	Description	Weight
8222413	S	Gauge: DD Virtual Gauge - Manifold Pressure Boost	0
8222414	S	Gauge: DD Virtual Gauge - Engine Percent Torque	0
8222420	O	GAU: DD VIRTUAL GAUGE - AUTOMATED TRANS CLUTCH TEMP - INSTRUMENT CLUSTER	0
8222712	O	Gauge: Fuel Filter Restriction Gauge.	0
8222722	O	Gauge: Manifold Pressure Gauge. The NavPlus HD unit includes a virtual manifold pressure gauge.	0
8225658	O	Gauge: Axle Oil Temperature, Dual-Drive Axle. (2 gauges) w/integral warning light.	0
8282027	S	Main Instrument Package: 15" Digital Display. Includes Speedometer, Tachometer, Primary Air Pressure, Secondary Air Pressure, Fuel Level #1, DEF Level, DPF Filter Status, Fuel Economy, Oil Pressure, Coolant Temp, OAT and Voltmeter, and Air Application.	0
8282108	O	Modular Dash Options: RH Dash Storage Unit With two shelves. Reduces total gauge count; HD by 6 and MD by 4.	0
8300008	S	Interior Color: Slate Gray	0
8330102	S	Interior Package: Vantage Daycab Includes durable headliner and vinyl sidewalls with geometric patterned trim and anodized aluminum accents throughout. Convenient overhead storage cubbies, full size glove box, two center console cupholders, and large door pad map pocket. Standard LH/RH power windows, electric door locks, interior LED lighting, nighttime-friendly red ambient lighting for dash and footwell, and door mounted courtesy light. Includes two standard 12V power outlets. Driver sunvisor includes strap.	0
8390634	S	Rubber Floormat	0
8410278	O	Driver Seat: GT702 HB with DuraCloth w/ Vinyl material. The GT702 is standard with a single air bag, scissor linkage seat suspension that incorporates seat height memory, auto-leveling valves with exit air dump, and adjustable damper. It includes a dual chamber lumbar support, 10in Fore/Aft adjustment, 5in Up/Down adjustment with protection zones, 2.5in pan extension, 51 degree seat back recline, and 16 degree full seat tilt. Includes 3-point matching seat belts. DR seat standard w/ dual armrests.	10
8480120	S	Rider Seat: GT100 Toolbox HB with DuraCloth w/ Vinyl material. The GT100 seats are standard with fixed base. Includes 3-point matching seat belts. Rider seat standard w/ LH armrest.	0
8490181	S	Seat Color: Black	0
8601429	O	Kenworth Radio DEA730 AM/FM/WB/USB, Bluetooth & Sirius-XM Satellite	0
8698982	O	Mid Level Audio System - Daycab: High Performance Door and B-Pillar Speakers.	4

Price Level: August 1, 2025

100% Complete

Date: November 06, 2025

Deal:

Quote Number: QUO-1140090-Y5D1S7

Printed On: 11/13/2025 1:46:24 PM



KENWORTH

Sales Code	Std/ Opt	Description	Weight
8699926	O	CB Installation Kit: Center Mounted of Header. W/header mounted quick release CB mount. One red power post & one black ground post. Includes dual antenna leads located on the mirror brackets. Includes dual antenna & separate speaker.	2
8700197	S	Turn Signal: Non-Self Cancelling	0
8700283	S	LH and RH Trip Ledge Rain Deflectors	0
8700601	S	Global Telematics Unit	0
8800260	O	Long Grabhandle RH Side Mounted to Side-of-Cab exhaust.	2
8800262	O	Long Grabhandle LH Side Mounted to Side-of-Cab exhaust.	2
8800402	S	Dual Cab Interior Grabhandles: A Pillar Mounted Dash Wrap and B Pillar Mounted Grabhandles	0
8832113	S	Kenworth Daylite Door With Standard LH/RH electric door locks and LH/RH electric window controls.	0
8841618	O	Dual Rectangular Air Horn 23 in. LH & RH Top of roof. Includes air horn covers.	4
8850139	S	Look-Down, Pass. Door, Black 11x6	0
8865002	S	Aero Mirror: Dual Kenworth Aerodynamic Motorized heated mirrors, 7in X 13in with cab color mirror shell and black mirror arms. Also includes LH/RH heated 6in X 7in convex mirrors. Mirror brackets set for 8-1/2 ft load width. Mirror controls located on driver side door pad.	0
8871446	S	Rear Cab Stationary Window 19in x 36in	0
8890038	O	3.5in x 11.5in Plastic Records Holder:Mounted On Rear Cab Panel. Not available With Sleeper Or 2 Person Bench Seat.	0
8890101	S	One-Piece Bonded-In Windshield With Curved Glass. Standard.	0
8890135	S	Exterior Stainless Steel Sunvisor.	19
8890300	O	Fender Close-Out: Below Headlamp, Behind bumper. *NOT available with 3-piece bumper.	0
8890348	O	Wheelwell Fender Extension: 4.5 inches	1
8890876	S	Kenworth Cab/Sleeper Air Suspension.	0
Lights & Instruments			
9010553	S	Headlamps: SAE Dual Halogen Complex Reflector	0
9022137	S	Marker Lights: Five Rectangular LED.	0
9030016	S	Turn Signal Lights: Flush Mounted LED. Mounted at top of fender wheel arc.	0
9030052	S	LED Stop,Turn,Tail: With Two LED	0

Price Level: August 1, 2025

100% Complete

Date: November 06, 2025

Deal:

Quote Number: QUO-1140090-Y5D1S7

Printed On: 11/13/2025 1:46:24 PM



KENWORTH

Sales Code	Std/ Opt	Description	Weight
		Backup Lights and With An LED License Plate.	
9052008	O	Floodlights: Dual LED Flush First Set	0
9059921	O	Floodlight Location: Located Low - First Set . This Code To Be Used With Flush-Mount (9052011) or C/I (9058071) Codes Only.	0
9090027	O	Headlamps to Turn on When Wipers are Active.	0
9090039	S	Marker Lights: Interrupter Switch. Included in Turn Signal For All Models Except T3. The T3 Switch Is In The Dash.	0
9090052	O	Brake Lights on when Engine Brake Active. Can only be selected when chassis also has engine brake. Cannot be used with options to delete engine brake.	0
9090115	O	Reflectors: Two Midframe	0
9090849	O	Polyswitches Replacing Fuses. Switch Will automatically reset after removal of excess load.	0

Air Equipment

9101219	O	Air Dryer: Bendix AD-HF Extended Purge Heated With Puraguard	0
9108001	S	Moisture Ejection Valve W/ Pull Cable Drain.	0
9110020	O	Full Truck Kit Gladhands mounted at end-of-frame. Seven-way female receptacle mounted at end-of-frame in taillamp bracket. Kit includes dash mounted trailer air supply valve, trailer hand control valve, and hoses/fittings for the valves. Dash mounted parking brake valve, tractor protection valve, and spring brake inversion/relay valves are standard.	15
9140020	S	Nylon Air Tubing in Frame & Cab, Excluding Hoses subject to excessive heat or flexing.	0
9140085	O	Bendix LQ-5 Ratio Valve: for Kenworth-Installed pusher/tag. LQ-5 valve limits the amount of air applied to the pusher brakes. Helps prevent lockup in lightly loaded conditions.	2
9140252	O	Locate Air Dryer Inside LH Rail BOC. This code requires the use of a custom frame layout code.	0
9140288	O	Air Tanks: Clear of Transmission Area. This code requires the use of a custom frame layout code.	0
9140328	O	Trailer ABS Electric Supply Through SAE J560 7-pin connector per TMC RP137).	0

Extended Warranty

9200021	S	Base Warranty - Standard Service Heavy Duty 12 months / 100,000 miles / 160,000 km.	0
9212653	O	TruckTech+ RD - 5YR Sub Cummins Engines	0
9220001	O	Base Warranty: Emissions 5YR/100K MI - EPA Engine	0

Price Level: August 1, 2025

100% Complete

Date: November 06, 2025

Deal

Printed On: 11/13/2025 1:46:24 PM

Quote Number: QUO-1140090-Y5D1S7



Sales Code	Std/ Opt	Description	Weight
Miscellaneous			
9409852	O	GHG Secondary Manufacturer: Does Not Apply	0
9490003	O	Additional Lead Time Required for Off Highway & /or specialty component truck.	0
9490206	O	Warning Triangle Reflector Kit: Shipped Loose. Kit consists of 3 triangles in plastic carrying case. Not floor mounted.	4
9490406	O	One 5 lb. Dry Chemical Type Fire Extinguisher mounted outboard of rider seat. Class ABC.	11
9491652	S	EMUX Architecture	0
Promotions			
Paint			
9700000	O	Paint Color Number(s).	0
		N9702 A - L0006 WHITE N9720 FRAME N0001 BLACK	
9943004	O	Bumper Unpainted	0
9943048	O	Day Cab Bulk Paint	0
9943050	O	Day Cab Standard Paint	0
9944820	S	1 - Color Paint - Day Cab Color will be White if no other color is specified.	0
9965510	S	Base Coat/ Clear Coat. The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0

Special Requirements

Special Requirement 1 0098025

Special Requirement 2

Special Requirement 3

Special Requirement 4

Order Comments

Price Level: August 1, 2025

100% Complete

Date: November 06, 2025

Deal: OX BODIES

Quote Number: QUO-1140090-Y5D1S7

Printed On: 11/13/2025 1:46:24 PM



Total Weight (lbs) 20,426

Any price increase as the result of force majeure, rising costs of components (including but not limited to material shortages) or government tariffs are not included in the quoted price and will be the financial responsibility of the customer.

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in CRM.

PRICING DISCLAIMER

While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information

Price Level: August 1, 2025

100% Complete

Date: November 06, 2025

Deal:

Printed On: 11/13/2025 1:46:24 PM

Quote Number: QUO-1140090-Y5D1S7



Shipping Destinations

Intermediate Destination:

Final Destinations	Quantity

Price Level: August 1, 2025

Deal: OX BODIES

Printed On: 11/13/2025 1:46:24 PM

100% Complete

Date: November 06, 2025

Quote Number: QUO-1140090-Y5D1S7



TRUCKWORX

PROPOSAL SUMMARY

Prepared for:

2026 ACCA Joint Bid

HEAVY DUTY DUMP: CHASSIS OPTION (C)



\$192,850.00

TRUCKS MOVE



AMERICA

 TRUCKWORX



TRUCKWORX

Attn: ACCA

January 1, 2026

Dear ACCA Administration:

Truckworx is proposing lowest cost ownership by offering the most aggressive residual value to the county members affiliated with the association. Please be advised that production will be limited to 51 slots for next year's ACCA contract. **First come, first serve basis will be the methodology Truckworx will utilize to fulfill orders next year. Please continue to call for more opportunities.**

2026 T880 Tri Axle Dump Truck

Engine Cummins	500HP 15- liter engine 1850 Torque
Transmission Allison w/PTO	4500 RDS
Front Axle Dana Spicer	20k
Rear Axle Dana Spicer	46k
Cab to Axle for Dump Truck	141
Color	White
Tires	11R24.5
Wheels	Polished Aluminum
Ratio	4.56
Fan hub on/off or Two speed fan hub	Fan hub Horton 2 speed
Cooling Module	1330 square inches
Alternator	160 amp

**Total Price:
\$192,850.00**



CC File: amandah@truckworx.com please copy on all ACCA orders.
Cell number: 601.331.2725

Amanda Hanks,
Director of Government Affairs

Thank you for your consideration regarding a Kenworth Truck. Please feel free to contact me if you have any questions. I look forward to providing you with "The World's Best!"


Amanda Hanks, Director of Government Affairs

O: 601.939.5300 | C: 601.331.2725

amandah@truckworx.com



TRUCKWORX

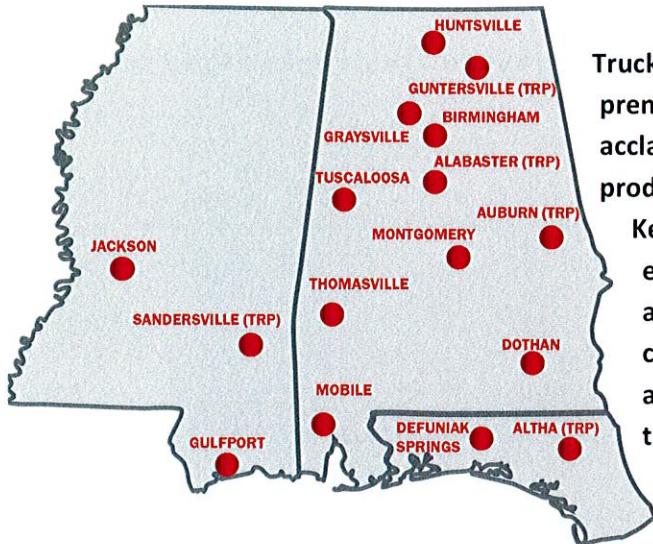

Truckworx is Alabama, Mississippi, and the Florida Panhandle's premier commercial truck dealer featuring nationally acclaimed parts and service teams and award-winning product lines. Our family-owned business was founded as Kenworth of Birmingham in 1978 and remains Alabama's exclusive Kenworth dealer today. Additionally, Truckworx also represents Hino (made by Toyota) and Isuzu commercial trucks; and we now offer full-service leasing and short-term rentals for vocational and over-the-road trucks through PacLease. We are also an authorized dealer of Yeti products, M.B. Ranch King deer blinds, and Pitmaker Grills.

In addition to our high-quality products, our level of service is unmatched! In fact, Truckworx was recently named 2023 North American Kenworth Dealer of the Year and recipient of the Dealer Excellence Gold Award by Kenworth Truck Company out of over 400 dealers nationwide! Our highly trained parts staff is knowledgeable on all makes and models, and we stock an extensive inventory of truck and bus parts in each of our facilities. We work on all makes and models and are certified to do warranty work on Caterpillar, Cummins, and Paccar engines; Kenworth, Hino, and Isuzu trucks.

Truckworx currently employs approximately 625 people throughout 17 locations in Alabama, Mississippi, and Florida. Full-service dealerships are located in Huntsville, Graysville, Birmingham, Montgomery, Dothan, Tuscaloosa, Thomasville, and Mobile, AL; Jackson, Gulfport, and Laurel, MS; and DeFuniak Springs, FL. Additionally, the company has five TRP Parts stores in Alabaster, Opelika, and Guntersville, AL; Altha, FL; and Gulfport, MS; and four Truckworx Fleet Solutions locations inside customers' facilities.

Truckworx Body Shop: The body shop portion of our new Graysville location features three new, state-of-the-art paint booths and offers a wide variety of services including complete collision repair, refurbishing equipment to meet trade terms, complete or spot/area painting, frame repair, front end alignment, cab repair or replacement, aluminum box repair, cargo box panel, door and floor repair, fiberglass repair, fabrication, glass replacement, and cosmetic upgrades.





TRUCKWORX KENWORTH - BIRMINGHAM (K415)
2220 FINLEY BOULEVARD
BIRMINGHAM, Alabama 35234

MAS MML ALM ACCA FAC
4321 MAIN ST
JACKSON, Mississippi 39073
United States of America

Christy Fletcher
Cell Phone:
Office Phone: 601-939-5300
Email: christyf@truckworx.com

Truck Buyer
Email: truck@buyer.com

Vehicle Summary

	Unit	Chassis
Model:	T880 Series Conventional	20000
Type:	FULL TRUCK	46000
Description 1:	MAS MML ACCA ALM FAC	88501
Description 2:		
	Application	Road Conditions:
Intended Serv.:	Construction: Vehicles used in the cons	Class A (Highway) 53
Commodity:		Class B (Hwy/Mtn) 40
		Class C (Off-Hwy) 6
		Class D (Off-Road) 1
	Body	Maximum Grade:
Type:	End Dump	6
Length (ft):	16	214
Height (ft):	10	90
Max Laden Weight (lbs):	88500	74
	Trailer	Cab to Axle (in): 140
No. of Trailer Axles:	0	Cab to EOF (in): 230
Type:		Overall Comb. Length (in): 352.5
Length (ft):	0	
Height (ft):	0	Special Req.
Kingpin Inset (in):	0	U.S. Domestic Registry, 50-state.
Corner Radius (in):	0	

Restrictions



Approved by:

Date:

11/13/25

Note: All sales are F.O.B. designated plant of manufacture.

**KENWORTH**

Sales Code	Std/ Opt	Description	\$ List
Model			
0000810	S	T880 Series Conventional	236,467
0070060	S	T880	0
0072000	O	Chassis Operation Will Not Incl. Stationary application. Stationary operation is defined as running the engine under load while stationary at a substantial fraction of engine gross horsepower (60% or greater) for an extended period of time (longer than 5 - 10 minutes).	0
0080101	O	CARB Low NOX Omnibus Registration Guidelines Dealer/Customer acknowledges that this vehicle is NOT intended for registration or domicile/primary use in the State of California.	0
0080310	O	EPA Clean Idle Label - Cummins Engines	107
0090000	S	Non-Sleeper w/ Rear Axle Capacity less than 59K.	0
0098401	O	State of Registry: Alabama	0

Engine & Equipment

0130357	O	Cummins X15 500V 500@1900 1850@900, 2024 with Intebrake, Productivity Series N09420 C333 0.....Reserve Speed Limit Offset (N09380 C334 0.....Maximum Cycle Distance (C334 N09360 C400 252...Reserve Speed Function Reset N09200 C399 100...Standard Maximum Speed Limit N09400 C401 10....Maximum Active Distance (C40 N09220 C402 0.....Expiration Distance (C402) N09540 C395 0.....Expiration Distance (C395) N09260 C121 68....Maximum Accelerator Pedal Ve N09440 C234 YES...Engine Protection Shutdown (N09460 C231 NO....Gear Down Protection (C231) N09580 C133 5.....Timer Setting (C133) N09680 C233 NO....Idle Shutdown Manual Overrul N09480 C132 1400..Max PTO Speed (C132) N09300 C128 68....Maximum Cruise Speed (C128) N09500 C239 NO....Cruise Control Auto Resume (N09520 C238 NO....Auto Engine Brake in Cruise N09240 C209 100...Hard Maximum Speed Limit (C2 N09780 C190 80....High Ambient Temperature Thr N09740 C188 40....Low Ambient Temperature Thre N09760 C189 60....Intermediate Ambient Tempera N09720 C382 YES...Enable Hot Ambient Automatic N09600 C396 YES...Enable Impending Shutdown Wa N09620 C397 60....Timer For Impending Shutdown N09640 C206 35....Engine Load Threshold (C206) N09560 C225 YES...Enable Idle Shutdown Park Br	12,020
---------	---	--	--------

Price Level: August 1, 2025

Deal: MAS MML ACCA ALM FAC

Printed On: 11/13/2025 11:25:04 AM

Date: 11/12/2025

DTPO Number: 10130377

**KENWORTH**

Sales Code	Std/ Opt	Description	\$ List
1000046	O	EPA Emissions Warranty Engine	0
1000151	S	PremierSpec	0
1000243	O	Gearing Analysis: Performance power before economy results.	0
1000255	O	Customer's Typical Operating Spd: 68 MPH	0
1000344	O	EWI Tracking - A2 Engine Module Chassis	0
1000525		RegistrationYear Year of Registration: 2025	0
1000684	O	Effective VSL Setting NA	0
1000857	S	Engine Idle Shutdown Timer Enabled	0
1000859	O	Enable EIST Ambient Temp Overrule	0
1000891	O	Eff EIST NA Expiration Miles Use only with MX and Cummins engines	0
1002080	O	Air Compressor: Cummins 18.7 CFM, Naturally Aspirated for Cummins X15 and X15N engines	206
1051200	S	Air Cleaner: Composite Firewall Mounted PACCAR or Cummins Engines	0
1099080	O	Pre-Cleaner Mounted in the Hood Plenum	370
1105220	O	Fan Hub: Horton 2-Speed for X15/X15N	27
1123555	S	Cooling module: 1330 square inches. Includes aluminum radiator core, aluminum charge air cooler, translucent surge tank and washer bottle, silicone hoses, and extended life coolant.	0
1160208	O	Bug Screen: Between Hood & Grille	128
1247251	O	EXH: Single Can 2024 RH Under with Dual Side-of-Cab Tailpipes	1,400
1290436	O	Tailpipe: 7 in. dual 36 in. 45 degree curved.	633
1291938	U	EXHAUST HEATSHIELD FOR SOC EXHAUST	97
		<i>Narr EXHAUST HEATSHIELD FOR SOC EXHAUST</i>	
1292944	O	Dual Lower Chrome Exhaust Elbow	676
1321125	O	Fuel Filter:Davco 382	470

Price Level: August 1, 2025

Deal: MAS MML ACCA ALM FAC

Printed On: 11/13/2025 11:25:04 AM

Date: 11/12/2025

DTPO Number: 10130377



KENWORTH

Sales Code	Std/ Opt	Description	\$ List
		Fuel/Water Separator	
1321204	O	Run Aid: Cummins TRV + Coolant Heat for Davco *For Fuel Filter, X15 and 2.1M only	489
1321305	S	Start Aid:12V Heat *For Fuel Filter	0
1500029	O	Kenworth Fuel Cooler Required for Cummins engines with a single fuel tank. Required for PACCAR MX-13 engine with a single fuel tank and stationary use: High RPM, low vehicle speed, sustained for longer than 1 hour. Optional for all other applications.	317
1504005	O	Immersion Block Heater 120V 1500W W/ Plug Under Door on C500, T660, T800 & W900.	150
1812162	O	Alternator: 160 amp Brushless with battery voltage sense. *This code replaced 1812160.	379
1821210	S	Batteries: 3 PACCAR GP31 Threaded Post (700-730) 2100-2190 CCA dual purpose.	0
1836103	O	PACCAR Premium 12V Starter W/ Cummins X15 Engines PACCAR 12 volt electrical system. With centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system with circuit protection circuits number & color coded.	94
1840065	S	12V Low Voltage Disconnect for Battery Protection	0
1900996	O	Jump Start Terminals Under Hood.	306
1901017	S	Remote PTO/Throttle, 12-Pin, Engine Bay Remote Control Provision	0

Transmission & Clutch

2016627	O	Transmission: Allison 4500RDS 6-speed, With PTO drive gear. No Retarder. 6th Generation controls. For vocational applications. Includes shift control, transmission oil temperature gauge, oil level sensor & heat exchanger. Transynd transmission fluid is standard on all Allison 1000, 2000, 3000 & 4000 series transmissions.	26,387
2406453	O	Driveline: 2 Dana SPL250XL 1 Centerbearing Low maintenance offering from Spicer. On-highway 350K mi first service interval, 100K mi subsequent service interval on U-joint, splines lubed for life, quick disconnect end caps.	1,185
2410018	O	Torque Converter Included W/ Allison Transmission.	0
2410151	O	Pushbutton Control Center Console Mounted.	0

Price Level: August 1, 2025

Deal: MAS MML ACCA ALM FAC

Printed On: 11/13/2025 11:25:04 AM

Date: 11/12/2025

DTPO Number: 10130377

**KENWORTH**

Sales Code	Std/ Opt	Description	\$ List
Class 8 with Allison Transmission.			
2410204	O	Allison Fuel Sense: Delete	0
2410244	O	J1939 Park Brake Auto Neutral	0
2410310	O	Allison Neutral at Stop	0
2410428	U	ALLISON RDS PKG 180	0
<i>Narr ALLISON RDS PKG 180</i>			
2429358	O	Rear Transmission Support Springs for transmission PTO applications are required to ensure that engine flywheel housings are not overloaded when transmission PTO's are installed.	92
2429378	O	Customer Installed Transmission PTO in the LH Mounted position (8 o'clock) for Allison 3000 & 4000 transmissions.	0
Front Axle & Equipment			
2536004	O	PACCAR FX-20 Front Axle rated at 20K 4" drop wide track	919
2601612	O	Front Brakes: BENDIX HP-ES 16.5X6 MAX CAP 22k	101
2690035	O	Front Brake Drum: 22K 16.5x6 in. cast.	-231
2702020	O	Front Hubs Iron Hub Pilot 20,000 lbs. 10 Bolt 16.5x6in. or 7in. or air disc brakes. 10 Bolt, 11-1/4 in. bolt circle. Consider Wheelguards (5850002) with aluminum wheels.	-211
2741970	S	ConMet PreSet Plus Hub Package; Front Axle.	0
2750001	S	Hubcap: Front Vented.	0
2765001	O	Front Auto Slack Adjuster for Drum Brakes.	0
2866020	S	Front Springs: Taperleaf 20K W/ Shock Absorbers w/ maintenance-free elastomer spring pin bushings. Standard with rubber pins except for C500 which has threaded pins. Not available on W900L. W900B use 2866021.	0
2893642	S	Dual Power Steering Gear: 16-22K TRW THP60	0
2899336	S	Power Steering Cooler:Radiator Mounted Air-to-Oil	0
2900020	O	Front Frame Raised: 1/2 in.	27
2900616	O	Threaded Bushings for Taperleaf Spring	107

Price Level: August 1, 2025

Deal: MAS MML ACCA ALM FAC

Printed On: 11/13/2025 11:25:04 AM

Date: 11/12/2025

DTPO Number: 10130377



KENWORTH

Sales Code	Std/ Opt	Description	\$ List
16K, 18/20K, 22K, 40K replacing rubber.			
Rear Axle & Equipment			
3144183	O	Dual Dana Spicer D46-172HP Rear Axle rated at 46K. w/ 16mm housing and 2.06in. shaft diameter. Includes pump. Tandem rear axles.	2,686
3200456	O	Rear Axle Ratio - 4.56.	0
3334004	O	Dual Rear Brakes 16-1/2x7 in. to 46K; Bendix ES-extended service S-cam.	-1,549
3392005	O	Dual Rear Brake Drums: Cast. For use with 16.5X7" or 16.5X8.625" brake.	-512
3407050	S	Dual Rear Hubs: Aluminum Hub Pilot 46K; 11.25" bolt circle. Requires "R" series outer ends.	0
3441972	S	ConMet PreSet Plus Hub Package; Dual Rear Axle.	0
3465002	O	Tandem Rear Axle Automatic Slack Adjusters. For use with drum brakes.	286
3485209	O	Spring Brake: 3030 High Output Dual. For drum brakes.	331
3495299	U	Need code 3495226 Bendix 4S/4M	-3,570
3500006	O	Inverted Chambers for 16-1/2 x 7 in. Brakes; Replaces standard mount w/ higher mount.	6
3500057	O	Interaxle Driveline: 1 Dana SPL170XL Tandem Rear Axles Only	-65
3532194	O	Wheel Differential Lock for Dana Spicer Axles D40-170(P)/D46-170(H)(P)(WT) forward rear axle & rear rear axle.	2,829
3573111	O	Separate Switch for Dual Axles: differential lock or crosslock.	15
3749209	O	Rear suspension: Tandem Chalmers 854-46-H 46K. 54 in. axle spacing. Unladen Height: 12.5 in. Laden Height: 10.1 in. Standard restrictor can.	3,608
3808025	O	Non-Steerable Pusher Axle: Watson Chalin AL2200 23K Standard track.	15,210
3820348	O	16.5x7 in. Bendix Non-RSD Brakes for Use With 21K or 23K non-steerable pusher assembly (included w/ axle).	0

Price Level: August 1, 2025

Deal: MAS MML ACCA ALM FAC

Printed On: 11/13/2025 11:25:04 AM

Date: 11/12/2025

DTPO Number: 10130377



KENWORTH

Sales Code	Std/ Opt	Description	\$ List
3820698	O	Cast Brake Drums 16.5x7 for Non-Steerable 21K or 23K pusher axle.	0
3821703	O	Non-Steerable Pusher Hubs Iron Hub Pilot 10-Hole 11.25 in. bolt circle for use with 21K or 23K axle.	0
3828339	O	Pusher or Tag: Gauge/ Switch Dash-Mounted; Gauge and pressure regulator mounted left of driver.	0
3828401	O	Pusher: Gauge Digital Display Single Pusher 1	0
3829025	U	SPECIAL DRILLING: ADDL HOLES/	77
		<i>Narr SPECIAL DRILLING: ADDL HOLES/</i>	
3830145	O	Delete Standard Heavy-Duty Air Springs for Rear suspension.	-23
3832026	O	Chalmers Shock Absorbers. 52K and Under suspension.	626
3841054	O	1st Pusher Location: 54 in. From C/I Forward tandem axle or single rear axle.	0

Tires & Wheels

4010120	U	Front tires: Michelin XZE 425/65R22.5 20PR	734
4210151	O	Rear Tires: Michelin X Works D 11R24.5 16PR	2,536
4783199	U	1 Non-Steerable Pusher: 4 Michelin XZE2 11R22.5	388
4900008	O	Rear Tire Quantity: 8	0
5045216	O	Front Wheel: Alcoa 82362 22.5x12.25 aluminum, with Lv One [TM] finish High Polish, hub-pilot mount. 11400lb. maximum rating. Super single. Standard track axles may be over 102 in. w/425 tires. Air disc brake compatible.	154
5245275	O	Rear Wheel: Alcoa 98U63 24.5X8.25 AL Ultra One High Polish Wheel.	3,140
5783505	O	Non-Steerable Pusher: Alcoa 88067 22.5x8.25 4-4 MagnaForce aluminum alloy, hub-pilot mount. 7400 lb maximum rating. Air disc brake compatible. High polish.	1,797
5900008	O	Rear Wheel/Rim Quantity: 8	0

Frame & Equipment

6056600	O	Frame Rails: 10-3/4 x 3-1/2 x 3/8in. Steel 337in. to 416 in. Truck frame weight is 3.48 lb.-in. per pair of rails. Section modulus is 17.80, RBM is 2,132,000 in-lbs per rail. Frame rail	995
---------	---	--	-----

Price Level: August 1, 2025

Date: 11/12/2025

Deal: MAS MML ACCA ALM FAC

DTPO Number: 10130377

Printed On: 11/13/2025 11:25:04 AM



KENWORTH

Sales Code	Std/ Opt	Description	\$ List
availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.			
6141400	O	Full Steel Insert: for 10-5/8 in. or 10-3/4 in. Steel 285 in. to 336 in. or 2nd insert for 11-5/8 in. steel frame. Adds 1,149,000 in-lb to main rail RBM. Truck insert weight is 2.05 lb.-in. per pair of rails. Full frame insert length is equal to wheelbase plus rear frame cutoff plus dimension forward of front axle by model. See databook addendum section 7.2.	2,615
6302461	O	Bumper: Tapered Chrome Steel Channel. Requires a bumper setting code.	594
6319485	S	48.5 in. Bumper Setting. Requires a Bumper Code.	0
6324025	O	Front Tow Hook: Center Mounted, Cast. Requires iron front drive brackets.	299
6391225	O	Custom Frame Layout: 25-49 Chassis CFL F/A: CFL IDENTICAL TO 167433 CFL A/D: MOUNT A/D INSIDE LH RAIL BOC B/T 28-42 . 1 A/T MOUNTED UNDER A/D OK CFL A/T: NO AIR TANKS AFT OF RR DRIVE AXLE; NO AIR TANKS LH & RH SIDE OF TRANS; 1 A/T UNDER BBOX OK CFL BBX: NO ADDL HOLES IN CUTOFF AREA; CUTOFF TO BE MODIFIED. CFL DEF: DRILL AT LEAST 10 HOLES IN EACH SIDE OF THE PUSHER MOUNTING BRACKETS CFL F/T: PLEASE EVENLY SPACE ALL FUEL TANK SUPPORT STRAPS	40
6397001	O	Huck Bolts Throughout Frame, where Possible.	322
6401235	O	Steel Cantilever Battery Box BOC W/ Smooth polished aluminum cover. Vocational Style.	816
6409902	O	Battery Box Location: RH Side.	116
6410010	O	Frame Access Grabhandle(s) LH Mounted. Placement and quantity of grabhandles may vary due to FMCSR frame access requirements.	61
6410092	O	Frame Access Grabhandle Horizontal Mounted at midpoint of sleeper or Daycab.	75
6414009	O	Deckplate: standard coverage, 4 feet unless less fits for space constraints.	256



KENWORTH

Sales Code	Std/ Opt	Description	\$ List
6451090	S	C5, T6, T8 diamond plate cover and black end plates with access step for right hand under DPF/SCR or CNG. For T8, use extended length non-polished battery box on opposite rail to match the length of under cab components. End plates will be painted standard black frame color.	0
6490440	O	Heavy-Duty BOC Crossmember Assembly.	215
6679824	O	Width Across Front Tires Exceeds 102 inches. Dealer to review delivery constraints w/transporter.	0
6679860	O	Final End-of-Frame Cut-Off Dimension Will be modified to 61 in. to 65 in.	0
6721102	S	Rear Mudflap Arms: Betts B-25 Standard-Duty, straight. Includes B1732 mounting brackets as standard.	0
6722000	S	Rear Mudflap Shields: White Plastic Antisail W/ Kenworth logo.	0
6741011	O	Square End-of-Frame W/ Crossmember; Non-Towing.	294

Fuel Tanks & Equip

7210110	O	Fuel Tank: 110 US Gallon 24.5 in. Aluminum Under replace. Class 8 fuel tanks w/o locking caps include an anti-siphon device on the filler neck.	220
7722153	S	Small Round DEF Tank, 14 Gallons. The DEF tank will be located on the side you specified. If you have specific configuration or body builder concerns, please utilize the Custom Frame Layout option. Standard capacity is calculated by fuel capacity of the vehicle and will accommodate two diesel fill-ups for every DEF fill-up. For 1:1 DEF fuel fill ratio, add 7889204.	0
7821100	O	Heavy-Duty 7 in. Steel Supports/ Straps for One 24.5 in tank. Two supports per tank.	447
7839400	O	Extended Steps on Fuel Tank LH Under for Access; 2 steps, 1 tank.	72
7840015	O	Polish Only One Aluminum Tank.	477
7840038	O	Polished Cover for 1 DEF Tank Any Size.	364
7889081	O	Polish Only 7 in. Stainless Steel Straps for One 24.5in. tank; 2 straps per tank.	158
7889203	S	DEF to Fuel Fill Ratio 2:1 or Greater.	0
7889245	S	Anti-Siphon Device in Fuel Tank Filler Neck. For any number of fuel tanks.	0

Price Level: August 1, 2025

Deal: MAS MML ACCA ALM FAC

Printed On: 11/13/2025 11:25:04 AM

Date: 11/12/2025

DTPO Number: 10130377



KENWORTH

Sales Code	Std/ Opt	Description	\$ List
7889604	S	DEF Tank Location is LH.	0
7920110	O	Location: 110 gal fuel tank LH under cab.	0
Cab & Equipment			
8025301	S	Cab: Stamped Aluminum Cab with Panoramic Curved glass windshield. Standard with stamped aluminum doors, heavy duty in-swinging hinges, and triple sealed doors. Manufactured using self-piercing rivets and structural adhesive. Includes LED exterior marker lights and turn signals.	0
8090604	O	Hood: T880 Set-Back Medium Length. 122.6 inch BBC W/Std Bumper.	330
8098212	O	Bright Engine Air Intake Chrome Trimmed Engine Air Intake on Both Sides of Hood	111
8108002	O	Fine Particulate Filter for Cabin Air HVAC system. To provide extra filtration in high dust applications. Cabin airflow is reduced with this additional filter. *Cannot be used with code 8108003.	46
8108011	S	Cab HVAC - Day Cab and 40 in. Sleeper System With Defrost, A/C, and 48,000 BTU/hr Heater. Includes automatic temperature control with one touch defrost operation and dash mounted cab temperature and solar intensity sensors. Pleated fresh air filter and cabin recirculation air filter standard. The Kenworth HVAC system is designed to provide optimal heating and cooling in all operating environments without need for additional insulation. Cab HVAC without sleeper heater AC is available with 40in sleeper.	0
8201043	O	Kenworth Smartwheel: 18 in. Leather Wrapped With Integrated Radio and Cruise Controls.	173
8201051	O	Column Mtd Retarder Control, RH Side Use with Manual & Allison Transmissions Only.	0
8201200	S	Adjustable Telescoping Tilt Steering Column.	0
8203196	O	Dash Mounted Compact Trailer Brake Valve. Self Returning.	0
8203198	U	WRG: C/I CAB PANEL LTS UNDER THE CAB	82
<i>Narr WRG: C/I CAB PANEL LTS UNDER THE CAB 8203199 WRG: CI CAB PANEL LTS UNDER THE CAB</i>			
8205012	O	Off-Highway Dash Switch: For ABS System. Includes indicator light.	59
8205177	O	Dash Switch:1st Allison-Mounted PTO.	247

Price Level: August 1, 2025

Deal: MAS MML ACCA ALM FAC

Printed On: 11/13/2025 11:25:04 AM

Date: 11/12/2025

DTPO Number: 10130377



KENWORTH

Sales Code	Std/ Opt	Description	\$ List
		Electric switch and wiring are factory-installed to control the 1st Allison Trans mounted PTO.	
8205228	O	One (1) Spare Accessory Electric-Over-Air Switch with Latching Air Solenoid. Mounted on dash for customer-installed option. Latching means the output air pressure will remain on, while there is air remaining in the air tank, when the ignition is off and switch position is on. Not intended for Trailer Lift Axle controls, see 8208607 and 8208608.	114
8205283	O	Info for C/I PTO: Chelsea 10 Bolt	0
8208495	O	Two Spare Switches: Wired to Power.	90
8221160	O	Gauge: Engine Oil Temperature Gauge With Integral warning light. The NavPlus HD unit includes a virtual engine oil temperature gauge.	46
8222404	S	Gauge: DD Virtual Gauge - Oil Temp Engine	0
8222409	S	Gauge: DD Virtual Gauge - Air Filter Restriction	0
8222413	S	Gauge: DD Virtual Gauge - Manifold Pressure Boost	0
8222414	S	Gauge: DD Virtual Gauge - Engine Percent Torque	0
8222712	O	Gauge: Fuel Filter Restriction Gauge.	149
8222722	O	Gauge: Manifold Pressure Gauge. The NavPlus HD unit includes a virtual manifold pressure gauge.	44
8225658	O	Gauge: Axle Oil Temperature, Dual-Drive Axle. (2 gauges) w/integral warning light.	234
8282027	S	Main Instrument Package: 15" Digital Display. Includes Speedometer, Tachometer, Primary Air Pressure, Secondary Air Pressure, Fuel Level #1, DEF Level, DPF Filter Status, Fuel Economy, Oil Pressure, Coolant Temp, OAT and Voltmeter, and Air Application.	0
8282108	O	Modular Dash Options: RH Dash Storage Unit With two shelves. Reduces total gauge count; HD by 6 and MD by 4.	47
8300008	S	Interior Color: Slate Gray	0
8330102	S	Interior Package: Vantage Daycab	0

Price Level: August 1, 2025

Deal: MAS MML ACCA ALM FAC

Printed On: 11/13/2025 11:25:04 AM

Date: 11/12/2025

DTPO Number: 10130377



KENWORTH

Sales Code	Std/ Opt	Description	\$ List
		Includes durable headliner and vinyl sidewalls with geometric patterned trim and anodized aluminum accents throughout. Convenient overhead storage cubbies, full size glove box, two center console cupholders, and large door pad map pocket. Standard LH/RH power windows, electric door locks, interior LED lighting, nighttime-friendly red ambient lighting for dash and footwell, and door mounted courtesy light. Includes two standard 12V power outlets. Driver sunvisor includes strap.	
8390634	S	Rubber Floormat	0
8410278	O	Driver Seat: GT702 HB with DuraCloth w/ Vinyl material. The GT702 is standard with a single air bag, scissor linkage seat suspension that incorporates seat height memory, auto-leveling valves with exit air dump, and adjustable damper. It includes a dual chamber lumbar support, 10in Fore/Aft adjustment, 5in Up/Down adjustment with protection zones, 2.5in pan extension, 51 degree seat back recline, and 16 degree full seat tilt. Includes 3-point matching seat belts. DR seat standard w/ dual armrests.	88
8480120	S	Rider Seat: GT100 Toolbox HB with DuraCloth w/ Vinyl Vinyl material. The GT100 seats are standard with fixed base. Includes 3-point matching seat belts. Rider seat standard w/ LH armrest.	0
8490181	S	Seat Color: Black	0
8601429	O	Kenworth Radio DEA730 AM/FM/WB/USB, Bluetooth & Sirius-XM Satellite	238
8698982	O	Mid Level Audio System - Daycab: High Performance Door and B-Pillar Speakers.	52
8699926	O	CB Installation Kit: Center Mounted of Header. W/header mounted quick release CB mount. One red power post & one black ground post. Includes dual antenna leads located on the mirror brackets. Includes dual antenna & separate speaker.	364
8700197	S	Turn Signal: Non-Self Cancelling	0
8700283	S	LH and RH Trip Ledge Rain Deflectors	0
8700601	S	Global Telematics Unit	0
8800260	O	Long Grabhandle RH Side Mounted to Side-of-Cab exhaust.	68
8800262	O	Long Grabhandle LH Side Mounted to Side-of-Cab exhaust.	68
8800402	S	Dual Cab Interior Grabhandles: A Pillar Mounted Dash Wrap and B Pillar Mounted Grabhandles	0
8832113	S	Kenworth Daylite Door With Standard LH/RH	0

Price Level: August 1, 2025

Deal: MAS MML ACCA ALM FAC

Printed On: 11/13/2025 11:25:04 AM

Date: 11/12/2025

DTPO Number: 10130377



Sales Code	Std/ Opt	Description	\$ List
electric door locks and LH/RH electric window controls.			
8841618	O	Dual Rectangular Air Horn 23 in. LH & RH Top of roof. Includes air horn covers.	324
8850139	S	Look-Down, Pass. Door, Black 11x6	0
8865002	S	Aero Mirror: Dual Kenworth Aerodynamic Motorized heated mirrors, 7in X 13in with cab color mirror shell and black mirror arms. Also includes LH/RH heated 6in X 7in convex mirrors. Mirror brackets set for 8-1/2 ft load width. Mirror controls located on driver side door pad.	0
8871446	S	Rear Cab Stationary Window 19in x 36in	0
8890038	O	3.5in x 11.5in Plastic Records Holder:Mounted On Rear Cab Panel. Not available With Sleeper Or 2 Person Bench Seat.	65
8890101	S	One-Piece Bonded-In Windshield With Curved Glass. Standard.	0
8890135	S	Exterior Stainless Steel Sunvisor.	893
8890300	O	Fender Close-Out: Below Headlamp, Behind bumper. *NOT available with 3-piece bumper.	232
8890348	O	Wheelwell Fender Extension: 4.5 inches	28
8890876	S	Kenworth Cab/Sleeper Air Suspension.	0
Lights & Instruments			
9010553	S	Headlamps: SAE Dual Halogen Complex Reflector	0
9022137	S	Marker Lights: Five Rectangular LED.	0
9030016	S	Turn Signal Lights: Flush Mounted LED. Mounted at top of fender wheel arc.	0
9030052	S	LED Stop,Turn,Tail: With Two LED Backup Lights and With An LED License Plate.	0
9052008	O	Floodlights: Dual LED Flush First Set	213
9059921	O	Floodlight Location: Located Low - First Set . This Code To Be Used With Flush-Mount (9052011) or C/I (9058071) Codes Only.	0
9090027	O	Headlamps to Turn on When Wipers are Active.	0



KENWORTH

Sales Code	Std/ Opt	Description	\$ List
9090039	S	Marker Lights: Interrupter Switch. Included in Turn Signal For All Models Except T3. The T3 Switch Is In The Dash.	0
9090052	O	Brake Lights on when Engine Brake Active. Can only be selected when chassis also has engine brake. Cannot be used with options to delete engine brake.	0
9090115	O	Reflectors: Two Midframe	25
9090849	O	Polyswitches Replacing Fuses. Switch Will automatically reset after removal of excess load.	49
Air Equipment			
9101219	O	Air Dryer: Bendix AD-HF Extended Purge Heated With Puraguard	145
9108001	S	Moisture Ejection Valve W/ Pull Cable Drain.	0
9110020	O	Full Truck Kit Gladhands mounted at end-of-frame. Seven-way female receptacle mounted at end-of-frame in taillamp bracket. Kit includes dash mounted trailer air supply valve, trailer hand control valve, and hoses/fittings for the valves. Dash mounted parking brake valve, tractor protection valve, and spring brake inversion/relay valves are standard.	1,005
9140020	S	Nylon Air Tubing in Frame & Cab, Excluding Hoses subject to excessive heat or flexing.	0
9140085	O	Bendix LQ-5 Ratio Valve: for Kenworth-Installed pusher/tag. LQ-5 valve limits the amount of air applied to the pusher brakes. Helps prevent lockup in lightly loaded conditions.	174
9140252	O	Locate Air Dryer Inside LH Rail BOC. This code requires the use of a custom frame layout code.	0
9140288	O	Air Tanks: Clear of Transmission Area. This code requires the use of a custom frame layout code.	0
9140328	O	Trailer ABS Electric Supply Through SAE J560 7-pin connector per TMC RP137).	0
Extended Warranty			
9200021	S	Base Warranty - Standard Service Heavy Duty 12 months / 100,000 miles / 160,000 km.	0
9210401	O	Allison 4000 Series Transmission Surcharge	1,600
9212653	O	TruckTech+ RD - 5YR Sub Cummins Engines	799

Price Level: August 1, 2025

Deal: MAS MML ACCA ALM FAC

Printed On: 11/13/2025 11:25:04 AM

Date: 11/12/2025

DTPO Number: 10130377



KENWORTH

Sales Code	Std/ Opt	Description	\$ List
9220001	O	Base Warranty: Emissions 5YR/100K MI - EPA Engine	0

Miscellaneous

9409852	O	GHG Secondary Manufacturer: Does Not Apply	0
9462002	O	Domestic Severe Service Package. Domestic severe service is required on any chassis operating within the 50 United States and Canada where the application includes class C road service 10% or more of the operation, or when vehicle will operate predominately on privately maintained, unimproved, or roughly prepared road surfaces. Specific vocations include, but are not limited to, oilfield service and Canadian logging service.	1,009
9490003	O	Additional Lead Time Required for Off Highway & /or specialty component truck.	0
9490206	O	Warning Triangle Reflector Kit: Shipped Loose. Kit consists of 3 triangles in plastic carrying case. Not floor mounted.	56
9490406	O	One 5 lb. Dry Chemical Type Fire Extinguisher mounted outboard of rider seat. Class ABC.	154
9491652	S	EMUX Architecture	0

Promotions

Paint

9700000	O	Paint Color Number(s). N9702 A - L0225 WHITE N9720 FRAME N0001 BLACK	0
9943004	O	Bumper Unpainted	0
9943048	O	Day Cab Bulk Paint	0
9943050	O	Day Cab Standard Paint	0
9944820	S	1 - Color Paint - Day Cab Color will be White if no other color is specified.	0
9960003	O	Non-Standard Paint Color.	295
9965510	S	Base Coat/ Clear Coat. The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0



TRUCKWORX

PROPOSAL SUMMARY

Prepared for:

2026 ACCA Joint Bid

HEAVY DUTY DUMP: CHASSIS OPTION (C)



\$183,350.00

TRUCKS MOVE



AMERICA

TRUCKWORX



TRUCKWORX

Attn: ACCA

January 1, 2026

Dear ACCA Administration:

Truckworx is proposing lowest cost ownership by offering the most aggressive residual value to the county members affiliated with the association. Please be advised that production will be limited to 51 slots for next year's ACCA contract. First come, first serve basis will be the methodology Truckworx will utilize to fulfill orders next year. Please continue to call for more opportunities.

2026 T880S Tri Axle Dump Truck	
PACCAR MX-13	510HP
Transmission Allison w/PTO	4500 RDS
Front Axle Meritor	20k
Rear Axle Meritor	46k
Non-Steerable Lift Axle	18k minimum
Color	White
Tires	425/65R22.5 & 11R24.5
Ratio	4.89
Alternator	160 amp
Price: \$183,350.00	



CC File: amandah@truckworx.com please copy on all ACCA orders.


Cell number: 601.331.2725

Amanda Hanks, Director of Government Affairs

Thank you for your consideration regarding a Kenworth Truck. Please feel free to contact me if you have any questions. I look forward to providing you with "The World's Best!"



TRUCKWORX

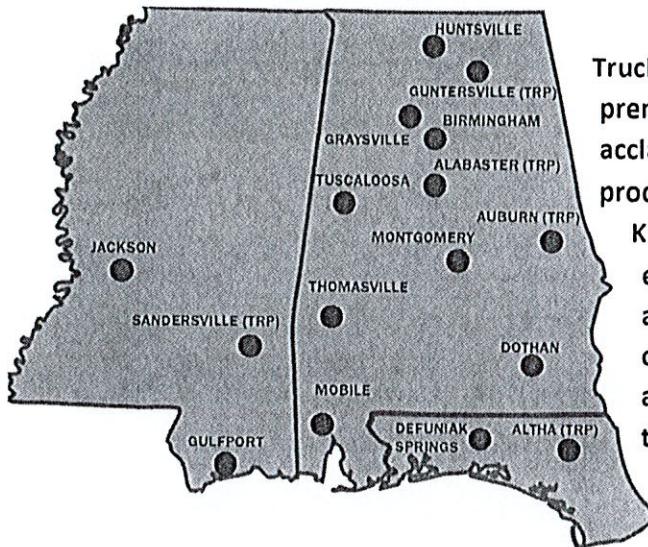


Truckworx is Alabama, Mississippi, and the Florida Panhandle's premier commercial truck dealer featuring nationally acclaimed parts and service teams and award-winning product lines. Our family-owned business was founded as Kenworth of Birmingham in 1978 and remains Alabama's exclusive Kenworth dealer today. Additionally, Truckworx also represents Hino (made by Toyota) and Isuzu commercial trucks; and we now offer full-service leasing and short-term rentals for vocational and over-the-road trucks through PacLease. We are also an authorized dealer of Yeti products, M.B. Ranch King deer blinds, and Pitmaker Grills.

In addition to our high-quality products, our level of service is unmatched! In fact, Truckworx was recently named 2023 North American Kenworth Dealer of the Year and recipient of the Dealer Excellence Gold Award by Kenworth Truck Company out of over 400 dealers nationwide! Our highly trained parts staff is knowledgeable on all makes and models, and we stock an extensive inventory of truck and bus parts in each of our facilities. We work on all makes and models and are certified to do warranty work on Caterpillar, Cummins, and Paccar engines; Kenworth, Hino, and Isuzu trucks.



Truckworx currently employs approximately 625 people throughout 17 locations in Alabama, Mississippi, and Florida. Full-service dealerships are located in Huntsville, Graysville, Birmingham, Montgomery, Dothan, Tuscaloosa, Thomasville, and Mobile, AL; Jackson, Gulfport, and Laurel, MS; and DeFuniak Springs, FL. Additionally, the company has five TRP Parts stores in Alabaster, Opelika, and Guntersville, AL; Altha, FL; and Gulfport, MS; and four Truckworx Fleet Solutions locations inside customers' facilities.

Truckworx Body Shop: The body shop portion of our new Graysville location features three new, state-of-the-art paint booths and offers a wide variety of services including complete collision repair, refurbishing equipment to meet trade terms, complete or spot/area painting, frame repair, front end alignment, cab repair or replacement, aluminum box repair, cargo box panel, door and floor repair, fiberglass repair, fabrication, glass replacement, and cosmetic upgrades.

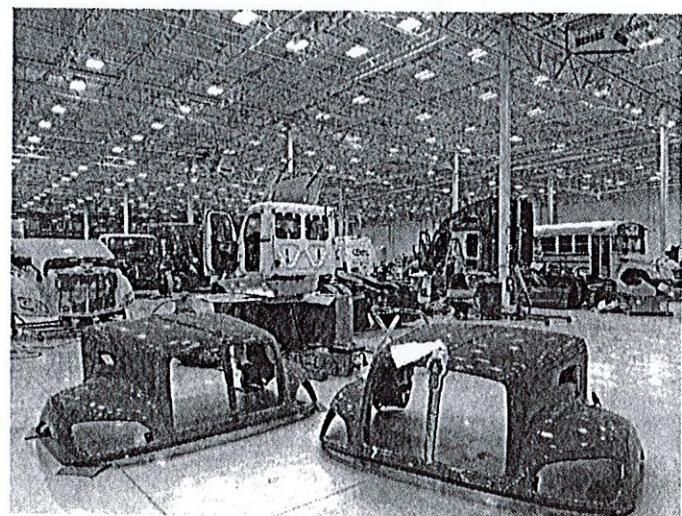

2025 Allison Transmission Coverage

ReTran® Pricing Guide

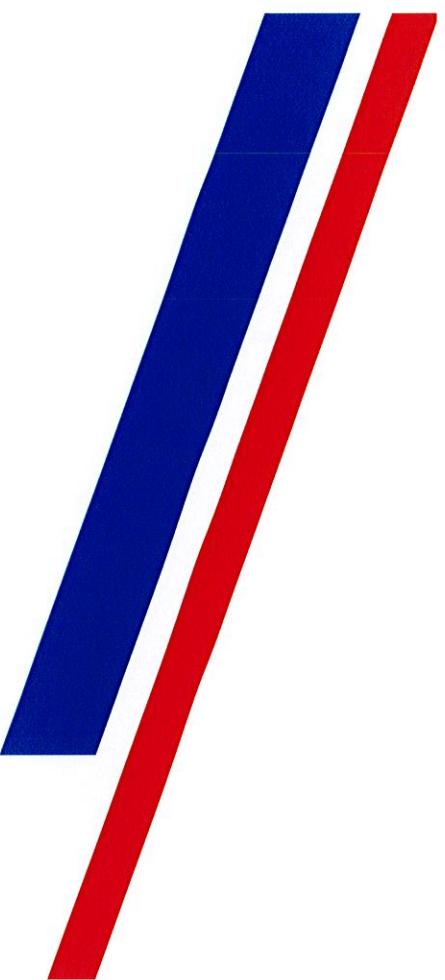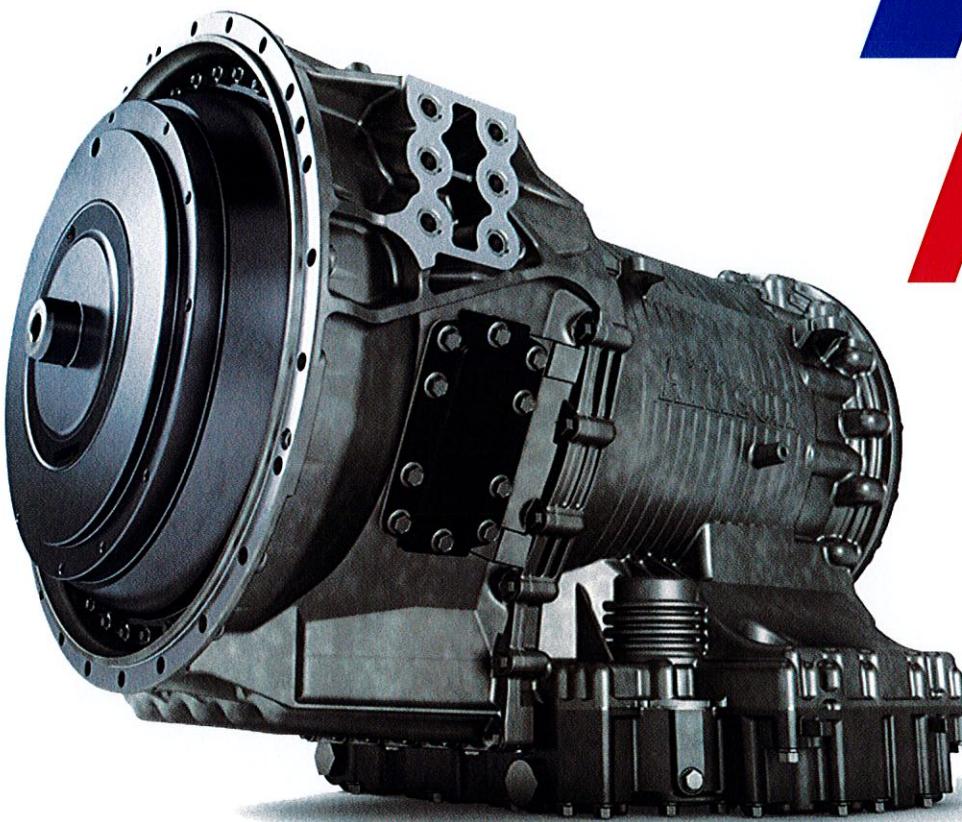

Improving The Way The World Works

Terms and Conditions for

Allison ReTran® Transmission Coverage

Transmission Coverage Definitions and Requirements

Standard Limited Warranty

All Allison ReTran® transmissions carry a comprehensive Standard Limited Warranty covering 100% parts and labor.* The length of Standard Limited Warranty coverage depends upon the Vocational Model Series and vehicle vocation.

Extended Coverage**

Extended Coverage can be purchased to increase coverage to a total of four years. Extended Coverage begins at the end of standard limited warranty and is available for purchase through Allison Authorized Distributors and Dealers.

REQUIREMENTS: Use of Allison Approved TES 668® or TES 295® transmission fluid** and Allison Genuine filters is required. Failure to use Allison Approved TES 668 or TES 295 transmission fluid and Allison Genuine filters will result in no coverage for repair beyond Standard Limited Warranty coverage. One hundred percent concentration is not achieved until the second consecutive fluid change using Allison Approved TES 668 or TES 295 transmission fluid. The second consecutive fluid change must be achieved at the time of Extended Coverage purchase.

* See ReTran Warranty Booklet SE0187EN for details.

** The terms and conditions under which Allison Transmission offers Extended Coverage are set forth on the back of the Extended Coverage Agreement Registration, available from any Allison Authorized Distributor or Dealer.

Q. During my Extended Coverage periods, will Allison Transmission cover repairs if I do not use an Allison Approved TES 668® or TES 295® transmission fluid and Allison Genuine filters?

A. No.

Q. Where can I purchase Extended Coverage?

A. You can purchase the coverage from any Allison Authorized Distributor or Dealer.

Q. When do I purchase Extended Coverage?

A. You can purchase the coverage at the time the ReTran Transmission is sold or within 12 months of the ReTran Transmission sale.

Q. How do I pay for this Extended Coverage?

A. You may include the cost with the purchase of your ReTran transmission (with dealer approval) or simply write a check to the Allison Authorized Distributor or Dealer.

Q. Do I have to return to the selling outlet to obtain service?

A. No. You may select any Allison Authorized Distributor or Dealer offering vehicle transmission service.

Q. If I decide to sell or trade in my vehicle before my coverage expires, can the remaining coverage be transferred to my ReTran transmission?

A. No. The remaining coverage is not transferable to your ReTran transmission. The Extended Coverage purchased stays with the transmission. There is no need for transfer papers to be filed.

Q. Are towing charges to the nearest Allison Transmission authorized service outlet covered by Extended Coverage?

A. See the ETC Agreement Registration terms and conditions for further details concerning towing coverage.

Q. Is the support equipment or transmission cooler purchased from Allison Transmission for original installations covered by Extended Coverage?

A. No.

Model Warranty Booklet

RETRAN®

SE0187

ReTran*	Standard Limited Warranty (Years Of Coverage)	Extended Coverage (Prices in USD)	
		1 Year	2 Years
1000**	2	\$703	\$1,157
2000**	2	\$654	\$953
2400	2	N/A	\$764
3000	2	N/A	\$731
3000 P	2	N/A	\$791
3000 P Refuse	2	N/A	\$1,484
3066	2	N/A	\$890
3066 P	2	N/A	\$920
3066 R	2	N/A	\$989
3066 PR	2	N/A	\$989
3500 P	2	N/A	\$873
3500 P Refuse	2	N/A	\$1,525
4000	2	N/A	\$1,539
4000 P	2	N/A	\$1,539
4000 P Refuse	2	N/A	\$2,338
4000 PR	2	N/A	\$1,848
4000 R	2	N/A	\$1,539
4500	2	N/A	\$1,503
4500 P	2	N/A	\$1,503
4500 P Refuse	2	N/A	\$2,413
4500 P with Cooler	2	N/A	\$1,783
4500 PR	2	N/A	\$1,590
4500 PR Refuse	2	N/A	\$2,500
4700	2	N/A	\$1,803
4700 P	2	N/A	\$1,803
4700 PR	2	N/A	\$2,002
B300	2	\$1,270	\$2,356
B300 R	2	\$1,679	\$3,226
B400	2	\$1,270	\$2,356
B400 R	2	\$1,791	\$3,463
B400 R with Cooler	2	\$1,890	\$3,672
B3400 xFE R	2	\$1,834	\$3,611
B500	2	\$1,188	\$2,061
B500 R	2	\$1,429	\$2,973

* Extended Coverage: Available for purchase through Allison Authorized Distributors and Dealers to increase coverage to a total of four years.

** 1000 Series™ and 2000 Series™ ReTran ETC not available for UK market.

Extended Coverage is not available for use on Refuse "Glider Kit" applications.