

BID SUBMITTAL FORM
Alabama County Joint Bid Program
BID ITEM – SKID STEER LOADER ATTACHMENTS

Company Name: Cowin Equipment Company Inc.

Address: 4325 Northern Blvd

Montgomery Al 36110

Bid Submitted by: John Edwards
(Name of company representative)

Title: Governmental Sales Manager E-mail address: jedwards@cowin.com

Phone: 8950-685-7055 Fax: 334-834-2272

By submitting this bid, we agree:

Initials

The equipment model number identified below meets the bid specs for this bid item

JE

That the bid price will be honored for all counties for the period from **January 1, 2026** to **June 30, 2026**.

JE

The equipment will be delivered at the bid price to all counties participating in the joint bid program

JE

The company representative listed above will be the contact person for purchasing this bid item under the joint bid program

JE

The bid is accompanied by a current catalog or model specification document for the model number identified below

JE

The bid is accompanied by a copy of the manufacturer's standard warranty as required in the bid specifications

JE

The bid includes the E-Verify documentation required by Alabama law

JE

We comply with, and if awarded the contract, we will comply with, the requirements of Section 41-16-50 and Sections 41-16-160 to -166, Code of Alabama 1975.

JE

If awarded the bid, a performance bond will be provided upon request

JE

The bid documents include the **Manufacturer's Suggested Retail Price Sheet (MSRP) for the Standard Machine**

JE

SKID STEER LOADER ATTACHMENTS

Attachment 1: SMOOTH DRUM VIBRATORY ROLLER

Total Bid Price for Standard Machine: \$ **\$14,209.00**

(Total Bid Price for Standard Machine Includes Freight Preparation, Delivery and Standard Warranty Costs) *

Freight Preparation and Delivery: \$ **\$1,50.00**
(Included in Standard Machine Bid Price)

Manufacturer's Suggested Retail Price for Standard Machine: \$ **\$16381.00**

Equipment Model #: **Paladin 105063**

Description: **Smooth Drum Vibratory Roller**

Signature of company representative submitting bid: *John Edwards*

Title: **Governmental Sales Manager**

Attachment 2: PAD FOOT VIBRATORY ROLLER

Total Bid Price for Standard Machine: \$ **\$15,233.00**

(Total Bid Price for Standard Machine Includes Freight Preparation, Delivery and Standard Warranty Costs) *

Freight Preparation and Delivery: \$ **\$1,250.00**
(Included in Standard Machine Bid Price)

Manufacturer's Suggested Retail Price for Standard Machine: \$ **\$17,425.00**

Equipment Model #: **Paladin 105067**

Description: **Pad Foot Vibratory Roller**

Signature of company representative submitting bid: *John Edwards*

Title: **Governmental Sales Manager**

SKID STEER LOADER ATTACHMENTS

Attachment 3: GRADER BLADE

Total Bid Price for Standard Machine: \$ No Bid

(Total Bid Price for Standard Machine Includes Freight Preparation, Delivery and Standard Warranty Costs) *

Freight Preparation and Delivery: \$ _____
(Included in Standard Machine Bid Price)

Manufacturer's Suggested Retail Price for Standard Machine: \$ _____

Equipment Model #: _____

Description: Grader Blade

Signature of company representative submitting bid: _____



Title: Governmental Sales Manager

Attachment 4: ANGLE BROOM

Total Bid Price for Standard Machine: \$ \$11,462.00

(Total Bid Price for Standard Machine Includes Freight Preparation, Delivery and Standard Warranty Costs) *

Freight Preparation and Delivery: \$ \$1,250.00
(Included in Standard Machine Bid Price)

Manufacturer's Suggested Retail Price for Standard Machine: \$ \$12,863.00

Equipment Model #: Paladin 22084

Description: Angle Broom

Signature of company representative submitting bid: _____



Title: Governmental Sales Manager

SKID STEER LOADER ATTACHMENTS

Attachment 5: COLD PLANER

Total Bid Price for Standard Machine: \$ **\$42,963.00**

(Total Bid Price for Standard Machine Includes Freight Preparation, Delivery and Standard Warranty Costs) *

Freight Preparation and Delivery: \$ **\$1,250.00**
(Included in Standard Machine Bid Price)

Manufacturer's Suggested Retail Price for Standard Machine: \$ **\$53,825.00**

Equipment Model #: **Paladin 114440 or Road Hog CP40G5**

Description: **Cold Planer**

Signature of company representative submitting bid: *John Edwards*

Title: **Governmental Sales Manager**

Attachment 6: ROAD WIDENER-SINGLE DISCHARGE

Total Bid Price for Standard Machine: \$ **No Bid**

(Total Bid Price for Standard Machine Includes Freight Preparation, Delivery and Standard Warranty Costs) *

Freight Preparation and Delivery: \$ _____
(Included in Standard Machine Bid Price)

Manufacturer's Suggested Retail Price for Standard Machine: \$ _____

Equipment Model #: _____

Description: _____

Signature of company representative submitting bid: *John Edwards*

Title: **Governmental Sales Manager**

SKID STEER LOADER ATTACHMENTS

Attachment 7: ROAD WIDENER- DUAL DISCHARGE

Total Bid Price for Standard Machine: \$ No Bid
(Total Bid Price for Standard Machine Includes Freight Preparation, Delivery and Standard Warranty Costs) *

Freight Preparation and Delivery: \$ _____
(Included in Standard Machine Bid Price)

Manufacturer's Suggested Retail Price for Standard Machine: \$ _____

Equipment Model #: _____

Description: _____

Signature of company representative submitting bid: John Edwards

Title: Governmental Sales Manager

Attachment 8: MULCHER

Total Bid Price for Standard Machine: \$ 42,189.00
(Total Bid Price for Standard Machine Includes Freight Preparation, Delivery and Standard Warranty Costs) *

Freight Preparation and Delivery: \$ \$1,250.00
(Included in Standard Machine Bid Price)

Manufacturer's Suggested Retail Price for Standard Machine: \$ \$50,585.00

Equipment Model #: Paladin MM60

Description: Mulcher

Signature of company representative submitting bid: John Edwards

Title: Governmental Sales Manager

* **NOTE:** Award will be made based on the total cost of the **Standard Machine**. The total cost of the standard machine is to include freight preparation, delivery and standard warranty cost. Freight preparation and delivery will be excluded from the total bid price of the standard machine in determining the percentage discount for any available options.

SPECIFICATIONS FOR SKID STEER LOADER ATTACHMENTS

GENERAL

These specifications shall be construed as the minimum acceptable standards for attachments compatible with the skid steer loader specifications. Should the manufacturer's current published data or specifications exceed these standards, the manufacturer's standards shall be considered minimum and shall be furnished. All integral parts not specifically mentioned in the scope of these specifications that are necessary to provide complete working unit(s) shall be furnished. Additionally, the attachments offered for bid shall include all standard manufacturers' equipment. The attachments bid must be a new current production model and shall meet all EPA and other applicable standards at the time of manufacture.

The use of specific names or numbers in the specifications is not intended to restrict the bidder or any seller or manufacturer but is intended solely for the purpose of indicating the type, size, and quality of equipment considered best adapted to the uses of counties participating in this joint bid.

Bidder is not required to bid on every attachment listed in this bid specification. Each attachment will be awarded individually to the lowest responsible bidder for that item.

BID SUBMITTAL FORM

Each bidder must submit his or her bid on the Bid Submittal Form included in the invitation to bid package. All written warranties to be submitted shall be attached to the Bid Submittal Form.

BID PRICE

The price bid for each attachment bid shall include all destination charges, delivery charges, title fees, rebates and all other applicable costs and refunds.

MANUALS

Each attachment shall be provided with one (1) copy of the owner/operator's manual for that attachment.

WARRANTY

Bidders shall submit a copy of the manufacturer's standard warranty along with a complete explanation of the warranty with their bid. All attachments must have (1) year warranty with no hour limit.

Yes No

Page#

or

Attachment

MINIMUM SPECIFICATIONS FOR SKID STEER LOADER ATTACHMENTS

All skid steer attachments listed below must be of the universal quick attach type and must be fully compatible with the skid steer loader to be awarded. As such, the attachment must be compatible with the bid specifications for the skid steer loader.

ATTACHMENT #1: SMOOTH DRUM VIBRATORY ROLLER

Weight	2000 lbs.	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Page # <u>2</u>
Hydraulic flow requirements	10 – 20 gpm	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Page # <u>2</u>
Working width	73"	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Page # <u>2</u>
Centrifugal Force	8,500 lbf	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Page # <u>2</u>
Flow control valve		Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Page # <u>2</u>

ATTACHMENT #2: PAD FOOT VIBRATORY ROLLER

Weight	2100 lbs.	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Page # <u>2</u>
Hydraulic flow requirements	10 – 20 gpm	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Page # <u>2</u>
Working width	73"	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Page # <u>2</u>
Centrifugal Force	8,500 lbf	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Page # <u>2</u>
Flow control valve		Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Page # <u>2</u>

ATTACHMENT #3: GRADER BLADE

Motor Grader style 8' moldboard with replaceable cutting edges

Yes No
Page #

2 front guide wheels with center oscillating pivot point

Yes No
Page #

In-cab hydraulic control box of blade height, angle, and tilt

Yes No
Page #

Proportional current valve for gradual adjustment of blade

Yes No
Page #

2 removable blade end plates

Yes No
Page #

Compatible with laser control system

Yes No
Page #

Weight 1200 lbs.

Yes No
Page #

Length 101"

Yes No
Page # **ATTACHMENT #4: ANGLE BROOM**

Hydraulic motor with hydraulic angle control

Yes No
Page # **2**

Weight 900 lbs

Yes No
Page # **2**

Straight Path 84"

Yes No
Page # **2**

Angled Path 75"

Yes No
Page # **2**

Angle 30 degrees

Yes No
Page # **2**

Brush Diameter 32"

Yes No
Page # **2**

Brush Material 50 poly/50 wire

Yes No
Page # **2**

ATTACHMENT #5: COLD PLANER

In cab electric control box to control unit

Yes No
Page # 2,1

Depth gauge

Yes No
Page # 2,1

Access door for access to drum

Yes No
Page # 2,1

Working Width

40"

Yes No
Page # 2,1

Weight

3100 lbs

Yes No
Page # 2,1

Hydraulic Requirements

40 gpm

Yes No
Page # 2,1

Max. Milling Depth

5"

Yes No
Page # 2,1

Side shift

-3" to 22"

Yes No
Page # 2,1

Tilt

+/- 8 degrees

Yes No
Page # 2,1

ATTACHMENT #6: ROAD WIDENER-SINGLE DISCHARGE

Hydraulic-driven conveyor

Yes No
Page #

10" Head and Tail Pulleys

Yes No
Page # **Right or left side discharge**Yes No
Page #

Hydraulic width/height adjustment

Yes No
Page #

Adjustable shoulderng angle

Yes No
Page #

Width

10'2"

Yes No
Page #

Length

7'6"

Yes No
Page #

Height

4'3"

Yes No
Page #

Working Width

1 - 3.5'

Yes No
Page #

Weight (Empty)

2600 lbs.

Yes No
Page #

ATTACHMENT #7: ROAD WIDENER DUAL DISCHARGE

Hydraulic-driven conveyor	Yes <input type="checkbox"/> No <input type="checkbox"/> Page # <u> </u>	
10" Head and Tail Pulleys	Yes <input type="checkbox"/> No <input type="checkbox"/> Page # <u> </u>	
Right and left side discharge	Yes <input type="checkbox"/> No <input type="checkbox"/> Page # <u> </u>	
Hydraulic width/height adjustment	Yes <input type="checkbox"/> No <input type="checkbox"/> Page # <u> </u>	
Adjustable shoulder angle	Yes <input type="checkbox"/> No <input type="checkbox"/> Page # <u> </u>	
Width	10'2"	Yes <input type="checkbox"/> No <input type="checkbox"/> Page # <u> </u>
Length	7'6"	Yes <input type="checkbox"/> No <input type="checkbox"/> Page # <u> </u>
Height	4'3"	Yes <input type="checkbox"/> No <input type="checkbox"/> Page # <u> </u>
Working Width	1 – 3.5'	Yes <input type="checkbox"/> No <input type="checkbox"/> Page # <u> </u>
Weight (Empty)	2600 lbs.	Yes <input type="checkbox"/> No <input type="checkbox"/> Page # <u> </u>

ATTACHMENT #8: MULCHING ATTACHMENT**MINIMUM SPECIFICATIONS FOR MULCHING ATTACHMENT**

Weight	2,250 lbs.	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Page # <u>2</u>
Horsepower rating	125	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Page # <u>2</u>
RPM speed of spindle shaft	1,900	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Page # <u>std</u>
Cutting width	58"	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Page # <u>2</u>

Overall width	72"	Yes <input checked="" type="checkbox"/> No <u> </u> Page # <u> </u> <u>2</u>
Fixed replaceable carbide cutting hammers (qty)	28	Yes <input checked="" type="checkbox"/> No <u> </u> Page # <u> </u> <u>2</u>
Rated hydraulic flow	30 – 40 gal	Yes <input checked="" type="checkbox"/> No <u> </u> Page # <u> </u> <u>2</u>
Hydraulic deflector door		Yes <input checked="" type="checkbox"/> No <u> </u> Page # <u> </u> <u>1</u>
4" diameter hydraulic pressure sight gauge which reads UP TO 6000 psi.		Yes <input checked="" type="checkbox"/> No <u> </u> Page # <u> </u> <u>2</u>
Rotor diameter including hammers	17.5"	Yes <input checked="" type="checkbox"/> No <u> </u> Page # <u> </u> <u>std</u>
Rotor tube wall thickness	3/4"	Yes <input checked="" type="checkbox"/> No <u> </u> Page # <u> </u> <u>2</u>
Rotor shaft diameter	3/8"	Yes <input checked="" type="checkbox"/> No <u> </u> Page # <u> </u> <u>std</u>
Rotor shaft attached inside of tube with (4) sweat collars		Yes <input checked="" type="checkbox"/> No <u> </u> Page # <u> </u> <u>2</u>
Lower bearing boxes equipped with dual spherical bearings with tapered lock system		Yes <input checked="" type="checkbox"/> No <u> </u> Page # <u> </u> <u>std</u>
Upper bearing box assembly for hydraulic motor equipped with dual tapered bearings		Yes <input checked="" type="checkbox"/> No <u> </u> Page # <u> </u> <u>std</u>
PD drive belt and matching drive pulley system		Yes <input checked="" type="checkbox"/> No <u> </u> Page # <u> </u> <u>2</u>
2 – Position adjustable lower skid plates		Yes <input checked="" type="checkbox"/> No <u> </u> Page # <u> </u> <u>1</u>
3 – Position adjustable push bar		Yes <input checked="" type="checkbox"/> No <u> </u> Page # <u> </u> <u>1</u>

INVITATION TO BID HEAVY EQUIPMENT

NOTICE OF BID OPENING

NOTICE IS HEREBY GIVEN that the Association of County Commissions of Alabama, which administers the Alabama County Joint Bid Program on behalf of Alabama's county governing bodies, shall receive and open bids for the purchase of zero (0) or more items of heavy road equipment at its office located at 2 North Jackson Street, Montgomery, Alabama, at **10:00 a.m. on Tuesday, November 18, 2025**. Bid specifications are available at <http://www.alabamacounties.org/heavy-equipment/> for each of the following items:

Track Mount Excavators	One-man Pothole Patchers
Compact Excavators	Trailer Mount Mastic Patcher/Crack Sealer
Mini Track Excavators	Trailer Mounted Patcher – Diesel
Wheeled Excavators	Trailer Mounted Patcher – Air Compressor/Tools
Highway Speed Truck Excavators	Chip Spreader
Motor Graders	Asphalt Distributor
Wheel Loaders	Asphalt Milling Attachments
Heavy Duty Dump Chassis	Asphalt Storage Tanks
Lowboy Tractors	Backhoes
Lowboy Trailers	Bulldozers
Half Round End Dump	Dump Bodies
Skid Steer Loader and Attachments	Road Wideners
Ride-on Industrial Boom Mowers	Ride On Industrial Boom Mowers
Rubber Tire Roller	
Vibratory Roller	

Time is of the essence in submitting bids and only bids received in the Association office by 10:00 a.m. Central Time on Tuesday, November 18, 2025 will be opened and considered. Bidders and any other interested individuals are invited to attend the bid opening.

NOTICE OF BID OPENING PROCEDURES

All bids for Heavy Equipment will be opened and the name(s) of the bidders read aloud on the morning of the bid opening on Tuesday, November 18, 2025 at 10:00 a.m. at 2 North Jackson Street, Montgomery, AL. The specifics of each bid submitted will be compiled by the Association staff thereafter and will be available, upon written or emailed request, one week after the bid opening. Requests should be emailed to jointbid@alabamacounties.org.

THE INVITATION PACKAGE

The invitation package for each item to be bid includes: this invitation to bid, the written bid specifications for the particular item of heavy road equipment, and a Bid Submittal Form to be used in submitting a bid for that particular item. Bidders should verify that they have received all pages of the invitation package. If there are any omissions, the bidder should contact Kenya Howard in the Association office by mail, fax, or e-mail (jointbid@alabamacounties.org) to request missing pages. It is the responsibility of the bidder to make this request in sufficient time to prepare and submit the bid in time for the bid opening. Bidders should carefully read and comply with all parts of the invitation package, including all attachments and/or any addendum.

PREPARING AND SUBMITTING BIDS

All bids must be typed or handwritten in ink on the attached Bid Submittal Form. **The completed Bid Submittal Form shall be placed in front of and separated from all other documents included in the bid packet, such that it will be the first document viewed upon opening the bid packet.**

Bids submitted in pencil and bids not submitted on the Bid Submittal Form **will not** be considered. All bids shall include a current catalog or model specification document for the equipment model number being offered for consideration. Bids submitted without such documentation **will not** be considered. Only information contained on the attached Bid Submittal Form and in the model specification document will be considered in evaluating bids.

Each separate requirement in the bid specification includes a block for indicating whether or not the item bid meets the specification. The bidder shall indicate compliance with each requirement by checking "Yes" or "No" in the block to the right of each bid specification. In addition, the bidder shall indicate the page number in the supplied manufacturer's equipment literature on which compliance with the specification can be verified. Failure to complete this portion of the bid form may result in the subject bid not being considered.

Each bid for one of the heavy equipment items included in the bid package must be submitted on the Bid Submittal Form for that item and forwarded in a separate envelope with the bid item and item number clearly identified on the outside of the envelope. Envelopes containing a "no bid" shall also include the words "NO BID" on the outside of the envelope. Facsimiles and e-mails will not be accepted. Bids submitted by "Express/Overnight" services must be in a separate inner envelope or package sealed and identified as stated above. All bids must be received in the Association office prior to the bid opening. Bids received after the deadline will be returned unopened.

The County Joint Bid Program reserves the right to require a performance bond from successful bidders as permitted under Alabama law. However, **no bid bond is required for this bid offering.**

All bids should be mailed or hand-delivered to:

**ATTN: Alabama County Joint Bid Program
Association of County Commissions of Alabama or ACCA
2 North Jackson Street, FL 7, Montgomery, Alabama 36104 (Physical Address)
P.O. Box 5040, Montgomery, Alabama 36103 (Mailing Address)**

BID SPECIFICATIONS

Please note that each piece of heavy equipment available for bid may include several different sizes and categories of machines. You should read each set of specifications very carefully as the differences vary depending upon the piece and size of equipment.

The award will be based on the total cost of the **Standard Machine** bid by the lowest responsible bidder. Each Bid shall include a **Manufacturer's Suggested Retail Price Sheet (MSRP)** for each machine bid. The percent difference between the Manufacturer's Suggested Retail Price (MSRP) for the standard machine as specified by these bid specifications and the actual price bid by the vendor will be calculated and that percentage discount shall be applied to any options an individual county may choose to add to the machine.

Both parties agree that the Vendor SHALL extend to ALL counties purchasing this equipment any factory discounts, incentives or rebates that become available during the Contract Period; provided that there are no alterations from the bid specifications for this item required in order to receive the discount, incentive, or rebate. FURTHER, BOTH PARTIES AGREE THAT THE VENDOR SHALL EXTEND TO ALL COUNTIES PURCHASING THIS EQUIPMENT THE SAME PURCHASE PRICE AND DISCOUNTS AS THEY ARE AWARDED ON ANY OTHER NATIONAL PURCHASING COOPERATIVE APPROVED BY THE DEPARTMENT OF EXAMINERS OF PUBLIC ACCOUNTS FOR USE BY ALABAMA COUNTIES.

Once the bids have been awarded, any county participant purchasing under this program may, at its discretion, add any of the vendor's available options at the same discount off the Manufacturer's Suggested Retail Price Sheet as was applied to the Standard Machine Price Bid.

Any use of specific names and/or model numbers in the attached specifications is not intended to restrict the bidder or any seller or manufacturer but is included solely for the purpose of indicating the type, size, and quality of materials, product services, or equipment considered best adapted to the use of the counties participating in the joint bid program.

ACQUISITION AND FINANCING OPTIONS

The awarded Vendor will provide the equipment, including any options required by the purchaser, at the awarded price as contracted through the Joint Bid Program. The purchaser may secure its own financing to acquire the equipment or execute any financial options available under Alabama law with the awarded Vendor in order to acquire the equipment.

BIDDER QUALIFICATIONS

All bidders and all program participants must be in compliance with any applicable federal, state, county and municipal laws, regulations, resolutions and ordinances, including but not limited to, licensing, permitting, and taxation requirements. All bidders should be prepared to submit evidence or documentation as proof that they are properly licensed and permitted under any applicable laws upon request. Such evidence or documentation may be submitted with the bid. **Additionally, all bidders shall provide proof that they are in compliance with the E-Verify requirements of Alabama's Immigration Law (Ala. Code § 31-13-1 et seq.). All bidders shall also affirm that they are in compliance with, and will comply with, Alabama's anti-boycott law (Ala. Code § 41-16-5) and anti-economic boycott law (Ala. Code § 41-16-160 et seq.).**

BID AWARD

The Houston County Commission will serve as the awarding authority for all bids and will award all contracts at a regular meeting of the Houston County Commission. Any and all bids submitted in compliance with this invitation to bid shall be considered, and award will be made to the lowest responsible bidder meeting bid specifications as determined by the awarding authority in compliance with Alabama law. All bids will be reviewed and evaluated by a committee created for that purpose, which committee will make comments and recommendations to the awarding authority regarding the award. All factors contained in each invitation package will be evaluated in determining the successful bidder, and any omissions of the stated requirements may be cause for rejection of the bid submitted. The awarding authority reserves the right to reject any and all bids, to waive any informality in bids, and to accept in whole or in part such bid or bids solely at its discretion.

The contract period will be six (6) months with an option to renew each six (6) months not to exceed a period of three (3) years under identical price, terms, and conditions upon the mutual consent of the vendor and the awarding authority. Any renewal contract shall be approved in writing by the vendor and the awarding authority no later than **60 days** prior to the expiration of the existing contract.

CONTACT REGARDING BIDS AND INVITATION

Contact initiated by a potential bidder with any county official, county employee, or member of the Association staff shall only be as specifically set out in this Invitation to Bid. Any questions related to the bid or the County Joint Bid Program shall be directed to Association staff in writing under the procedures set out in this Invitation to Bid. Additionally, a bidder may contact the Association in writing to request an appointment to review bid specifications following the bid opening. However, there shall be no communication with any county official or county employee regarding this bid between the date of this invitation and the date of bid award. Any contact other than as set out here shall be deemed as an attempt to unduly influence the bid award and shall be grounds for rejection of the bid submitted by the bidder initiating such other contact.

Any questions or problems related to downloading or obtaining copies of this Invitation to Bid should be directed to Kenya Howard at jointbid@alabamacounties.org or 334-263-7594.

Any other questions or requests for additional information regarding this invitation or the bid specifications shall be submitted **in writing** no later than five (5) days prior to bid opening to:

**ATTN: Patrick McDougald
Association of County Commissions of Alabama
P.O. Box 5040
Montgomery, Alabama 36104**


OR

**Patrick McDougald
Email: pattymackdaddy@gmail.com**



VIBRATORY ROLLER

FOR SKID STEER LOADERS

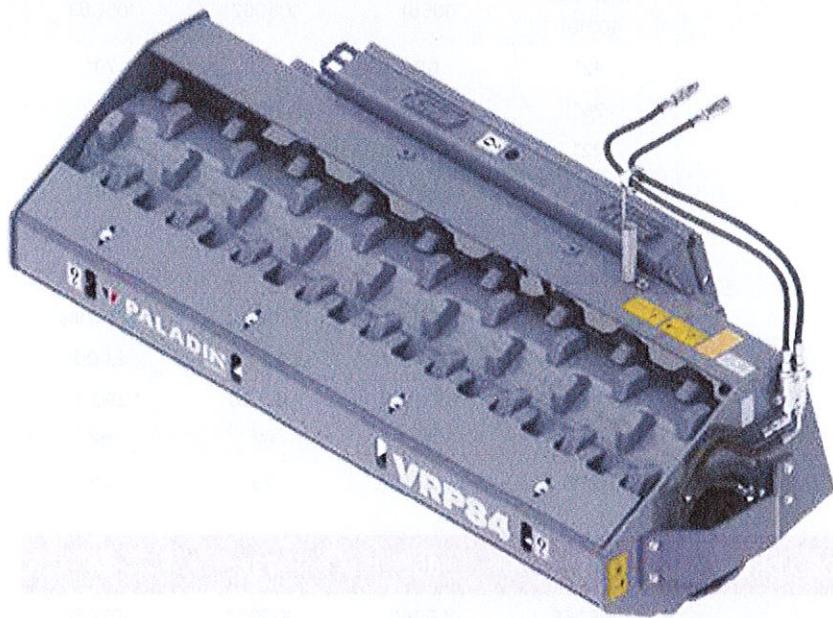

Features

- Seven models
- 36" to 84" working widths
- Hydraulic drives are protected and isolated to provide maximum performance and reliability
- Delivers up to 9,370 lbs of dynamic force when operating at 20 GPM
- 15° oscillation of drums
- Steel drum has an adjustable steel scrap blade between the frame and the drum ensuring smooth and uniform compaction performance
- Ideal for rental fleets, contractors, landscaping, roadways, walkways, bike paths, golf courses, bridges and parking lots

The **Bradco® Vibratory Roller** by Paladin, is skid steer compatible. The rollers are designed to follow ground contours for even compaction.







VIBRATORY ROLLER

FOR SKID STEER LOADERS

SPECIFICATIONS - SMOOTH DRUM	36"	48"	66"	73"	84"
Order Codes	109100 or 109101	10561	105062	105063	105064
A. Overall Width	42"	61"	72"	79"	90"
B. Drum Width	36"	48"	66"	73"	84"
C. Overall Height	22"	31"	31"	31"	31"
D. Overall Length	34"	39"	39"	39"	39"
E. Drum Diameter	20"	24"	24"	24"	24"
Operating Weight	840 lbs	1,680 lbs	2,150 lbs	2,300 lbs	2,530 lbs
Dynamic Force	2,488 lbs	5,750 lbs	7,800 lbs	8,550 lbs	9,370 lbs
Vibrating Speed (vpm)	2,000	2,600	2,600	2,600	2,600
Vibrating Weight	507 lbs	935 lbs	1,190 lbs	1,290 lbs	1,440 lbs
Drum Oscillation/Tile	15°	15°	15°	15°	15°
Hydraulic Motor Flow (gpm)	6-9 or 10-14	25	25	25	25

SPECIFICATIONS - PADDED DRUM	48"	66"	73"	84"
Order Codes	105065	105066	105067	105068
A. Overall Width	61"	72"	79"	90"
B. Drum Width	48"	66"	73"	84"
C. Overall Height	31"	31"	31"	31"
D. Overall Length	39"	39"	39"	39"
E. Drum Diameter (without pads)	20"	24"	24"	24"
Operating Weight	1,630 lbs	2,085 lbs	2,230 lbs	2,455 lbs
Dynamic Force	5,750 lbs	7,800 lbs	8,550 lbs	9,370 lbs
Vibrating Speed (vpm)	2,600	2,600	2,600	2,600
Vibrating Weight	507 lbs	935 lbs	1,190 lbs	1,290 lbs
Drum Oscillation/Tile	15°	15°	15°	15°
Maximum Flow	25	25	25	25

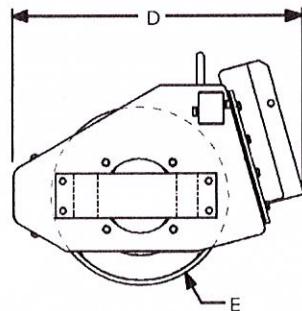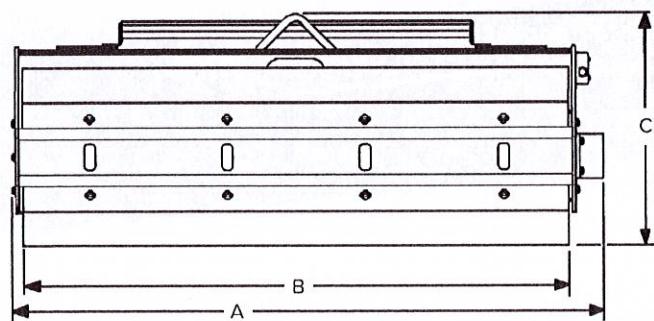



SWEEPERS CATALOG



Selection, Innovation, Performance
Your One-Stop Shop for Hydraulic Tools and Attachments

STANLEY.
Infrastructure

INDUSTRIAL TOOLS & ATTACHMENTS

PALADIN **STANLEY** **LABOUNTY** **PENGO**

SPECIAL FEATURES

Exclusive Patented Feature for Collector Sweepers

Waterless Dust Abatement


- VS and VCS models
- New hydraulic fan and filter assembly collects fine dust during sweeping
- Significantly reduces dust production from sweeping action
- No water tank on sprayer mechanism needed - dust control without impractical water systems that require constant refilling
- Filter can be cleaned by actuating a switch from inside cab
- No mud or clumpy debris cleanup required
- More comfort and safety for operator - no dust blowing into cab during operation



Waterless Dust Abatement Unit



High volume hydraulic fan pulls air from the sweeping chamber filtering the dust and exhausting clean air

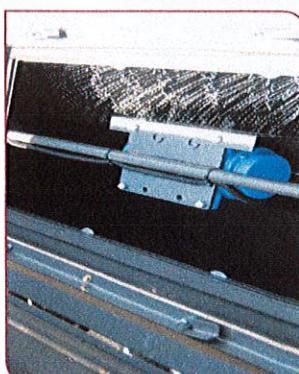

12 volt shaker dislodges loose debris from the filter media directly into the hopper

SWEEPERS FOR SKID STEER LOADERS

Prime Mover	Product Name	Description	Application
Skid Steers	QCSS Angle	SSL Angle Sweeper-Hydraulic Drive	Heavy duty cleanup
	SB Hopper	SSL Collector Sweeper-Hydraulic Drive	Standard duty cleanup
	SB Heavy Duty	SSL Collector Sweeper-Hydraulic Drive	Heavy duty cleanup, concrete and asphalt milling
	VRS Sweeper	SSL Collector Sweeper with Dust Abatement Capability-Hydraulic Drive	Heavy duty cleanup with high capacity bucket (22% more capacity than SB Hopper) and high dump.
	VS	SSL Collector Sweeper with Waterless Dust Abatement-Hydraulic Drive	Heavy duty cleanup with high capacity bucket (22% more capacity than SB Hopper), high dump, and waterless dust abatement

QCSS - SSL Angle Sweeper - Hydraulic Drive




- Heavy duty cleanup
- Powered from loader hydraulics
- 10-36 GPM flow required (3000 psi)
- Quick attach mount
- 32" brush diameter
- 5', 6', 7', 8' brush widths available
- Mechanical angle standard (hydraulic optional)
- Quick change core
- Optional modular design - can easily change single into dual or dual into single
- Fold away stands

Specifications - Single Motor		Specifications - Dual Motor	
Model Number	22059 22060 22071	22072 22083 22084	22096
A. Overall Height	33.5"	33.5"	33.5"
B. Overall Width @ 0°	74.8" 74.8"	86.8" 86.8"	98.8" 110.8"
C. Overall Length @ 0°	68.5" 68.5"	68.5" 68.5"	68.5" 68.5"
D. Sweeping Width @ 0°	60.0" 60.0"	72.0" 72.0"	84.0" 96.0"
E. Overall Length @ 30°	77.0" 77.0"	80.0" 83.0"	93.0" 106.0"
F. Overall Width @ 30°	75.2" 75.2"	85.6" 96.0"	105.4" 116.4"
G. Sweeping Width @ 30°	52.0" 52.0"	62.4" 62.4"	72.8" 83.2"
H. Center of Gravity	33.5" 33.5"	34.3" 34.3"	35.2" 35.9"
Weight (lbs)	793 831	852 890	953 1020
Flow Range (GPM)	10-18	12-25	10-18 12-25
Hydraulic Motor Displacement (C.I.)	18.3 24.9	18.3 24.9	Hydraulic Motor Displacement (C.I.)
# of Motors	1 1	1 1	# of Motors
Maximum Pressure (PSI)	3500	3000	3000 3500
Maximum Articulation	30° 30°	30° 30°	Maximum Articulation
Brush Diameter	32" 32"	32" 32"	Brush Diameter



A washable PTFE impregnated filter capable of filtering dust as small as 10 microns

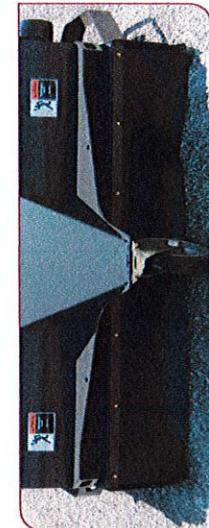


A double drape system seals the sweeping chamber to the ground



PALADIN

BRADCO

www.paladinattachments.com

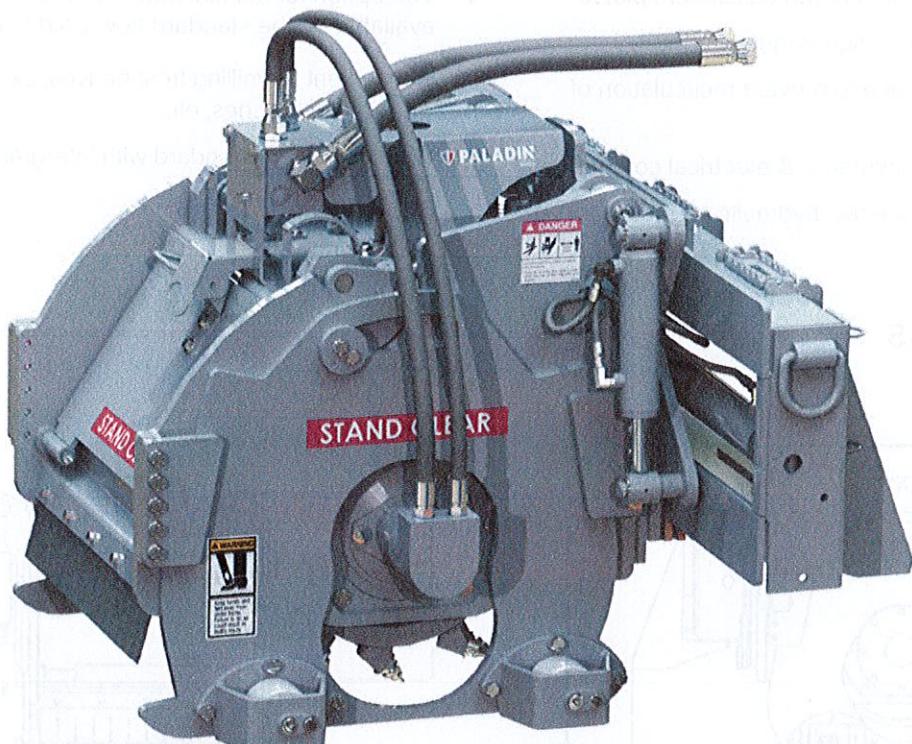

COLD PLANERS

FOR SKID STEER LOADERS

Paladin's™ cold planer is a highly effective tool for small milling jobs, as well as repairing asphalt and concrete potholes and frost heaves, cutting curbs, texturing pavement, and removing lane stripes and roadway around manholes.



COLD PLANERS

FOR SKID STEER LOADERS


FEATURES

- Independent self-leveling depth adjustment plates
- Planetary drive delivers high torque
- High rear spoil clearance to prevent recirculation of material
- Protective shields for hydraulic & electrical components
- Fully adjustable with electro-hydraulic controls
- The option for manual depth and tilt is exclusively available on the standard flow Cold Planer
- Convenient for milling frost heaves, expansion joints, railroad approaches, etc.
- Water nozzle kit standard with intergral nozzle pots

SPECIFICATIONS

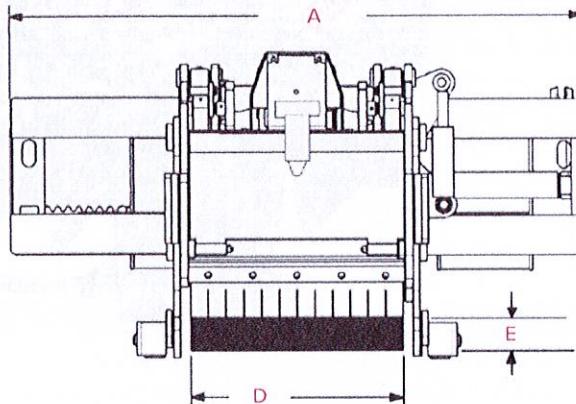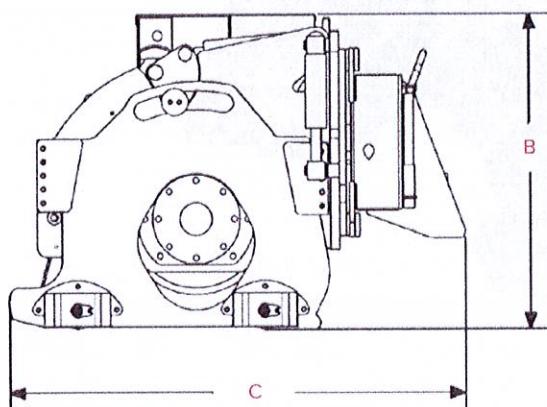

	SP300	HP400	HP450	HP600	HP750	HP1000
A. OVERALL WIDTH	51.94 IN. / 1295 MM	64.94 IN. / 1649 MM				
B. OVERALL HEIGHT	32.15 IN. / 817 MM	34.57 IN. / 878 MM				
C. OVERALL LENGTH	43.86 IN. / 1114 MM	50.30 IN. / 1278 MM				
D. PLANING WIDTH	12 IN. / 305 MM	16 IN. / 406 MM	18 IN. / 457 MM	24 IN. / 610 MM	30 IN. / 762 MM	40 IN. / 1016 MM
E. PLANING DEPTH	0 - 5 IN. / 0 - 127 MM	0 - 5 IN. / 0 - 127 MM	0 - 5 IN. / 0 - 127 MM	0 - 5 IN. / 0 - 127 MM	0 - 5 IN. / 0 - 127 MM	0 - 5 IN. / 0 - 127 MM
DRUM DIAMETER	19 IN. / 483 MM	22 IN. / 559 MM				
NUMBER OF PICKS	37	43	45	57	69	89
WEIGHT	1500 LBS / 680 KG	2150 LBS / 975 KG	2200 LBS / 998 KG	2400 LBS / 1087 KG	2600 LBS / 1179 KG	3100 LBS / 1406 KG
FLOW REQUIREMENT	15 - 22 GPM	22 - 40 GPM	31 - 40 GPM			

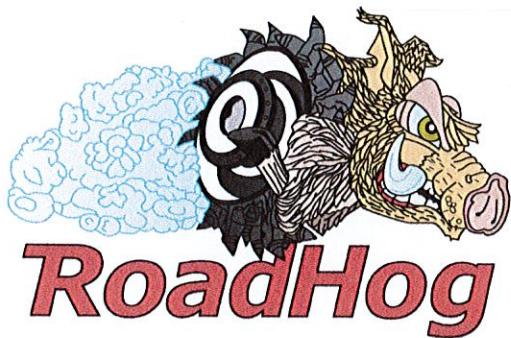

Cold Planers

For Skid Steers and Compact Track Loaders

18, 24", 30", 40" and 48" cutting width; 0-6" cutting depth

Independent control of left and right depth skis

Hydraulic tilt, depth and sideshift of cutting drum

Piston motor / planetary driveline

Optional 40 gallon ROPS mounted water system

Optional drum widths to fit any job requirement



Applications:

Milling asphalt prior to overlay

Pothole and shoulder repair

Cutting utility trenches

Restoring drainage elevation against curb lines

Base material reclamation

Removing trip hazards

Model	Min GPM / PSI	Cutting Width	Cutting Depth	# Cutting Teeth	Tilt	Sideshift	Weight
CP18G5	27 / 2,750	18 inches	0-6 inches	40	+/- 15 deg.	26 inches	1,805
CP24G5	30 / 2,750	24 inches	0-6 inches	56	+/- 13 deg.	26 inches	1,750
CP30G5	34 / 3,000	30 inches	0-6 inches	66	+/- 10 deg.	26 inches	2,155
CP40G5	37 / 3,450	40 inches	0-6 inches	76	+/- 8 deg.	26 inches	2,450
CP48G5	40 / 3,450	48 inches	0-6 inches	90	+/- 6 deg.	26 inches	2,685

RoadHog, Inc. • 877-640-9975 • www.roadhoginc.com • sales@roadhog-inc.com

Specifications and designs are subject to change without notice. Machines may be shown with optional equipment.

Rev 10/18



Features

- Designed to operate from 1,550 to 2,000 RPM
- Adjustable push bar on skid steer models
- Optional oil cooler available in both field and/or factory installation on skid-steer models
- Replaceable abrasion resistant AR400 wear plate on skid shoes
- Deflector door standard to control particle size and discharge direction
- 36", 42", 60", 72" cutting widths available
 - 36" Excavators only
 - 42" Excavators only
 - 60" Skid-Steer only; Excavator only
 - 60" Combo for both skid-steer and excavator
 - 72" Skid-Steer only

The **Bradco® Mulchers** by Paladin shred up to 12" diameter hardwood trees using a patented tooth design. Each tooth has a cross bar the full width of the tooth to help keep proper cutting alignment during operation.



Reversible Claw Tooth



Reversible Carbide Tooth



MULCHERS


FOR SKID-STEER LOADERS AND EXCAVATORS

SPECIFICATIONS	MM36E*	MM421*	MM422*	MM60S	MM60E	MM60C	MM60H	MM601*	MM72S	MM72H
Overall Width	48.5"	58"	58.6"	73"	73"	73"	73"	75.5"	85"	85"
Overall Height	24.8"	31.3"	33"	32.6"	42.3"	42.3"	32.6"	31.3"	32.6"	60.42"
Overall Length	33.03"	34.3"	34.9"	36.7"	36.7"	36.7"	36.7"	34.3"	36.7"	49.5"
Cutting Width	36"	42"	42"	60"	60"	60"	60"	60"	72"	72"
Height with Push Over Bar	-	-	-	60.4"	-	68.9"	60.4"	-	60.4"	32.63"
Length with Push Over Bar	-	-	-	49.5	-	53.3"	49.5"	-	49.5"	36.71"
Operating Pressure (PSI)	3500-5000	4500-5800	4500-5800	3000-4000	3000-5800	3000-5800	4500-5800	4500-5800	3500-4000	4500-5800
Hydraulic Flow (GPM)	28-41, 42-60	29-39	40-52	30-45	30-60	30-60	35-45	32-44	30-45	30-45
Recommended Hydraulic Horse Power (HP)	40-65, 65-90	55-95	75-115	60-95	60-95	60-95	90-130	60-100	75-95	90-130
Number of Teeth	26	30	30	44	44	44	44	44	54	54
Weight (lbs)	1580, 1600	N/A	2920, 2925	2530	2710	2980	2550	N/A	2860	2880
Prime Mover	Excavator	Excavator	Excavator	SSL/CTL	Excavator	Comb.	Specialty	Excavator	SSL/CTL	Forestry


* Multiple model variations available

Additional Features

- Patented Tree Stabilization Guide (MM36 models only)
- Fixed hammers with reversible and replaceable carbide and claw teeth can be easily interchanged without needing to rebalance the rotor
- Synchronous belt drive system eliminates belt and drive sprocket slippage
- Heavy duty bent axis variable displacement piston motor offers better performance optimization and allows mulcher to be switched easily to other prime movers without having to change out hydraulic motors, belts, or belt drive sprockets/pulleys

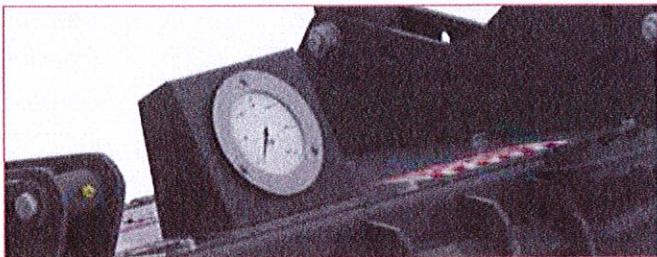

On-board pressure gauge easily viewed from operators station to monitor system pressure (N/S for excavator only models)

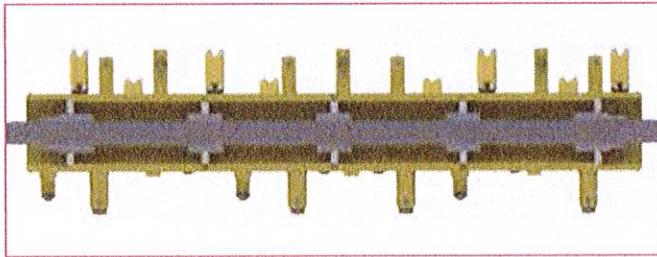

Heavy duty rotor construction; balanced .75"-1" wall drum with 2.438" alloy steel shaft through entire length of rotor; new rotor spiral cut pattern cuts the entire length of rotor and reduces the amount of cut per tooth to maximize efficiency & performance

Limited Warranty

All new products are warranted to be free from defects in material and/or workmanship for one (1) year. Under no circumstances will it cover any merchandise or components thereof, which, in the opinion of the company, have been subject to misuse, unauthorized modifications, alterations, accidents, or if repairs have been made with parts other than those obtainable through Paladin Light Attachment Tools.

Warranty period will begin on the date of invoice, or 6 months after invoice date if no product registration is received. In the event of a defect within the warranty period (excluding: Cable, ground engaging parts such as sprockets, digging chain, bearings, teeth, tamping and demolition heads, blade cutting edges, pilot bits, auger teeth, auger heads, and broom brushes) and after examination, it is determined failure was due to defective material and/or workmanship, part(s) will be repaired or replaced. PLC may request defective part(s) be returned to them for inspection at their place or business or sent to a specified locations.

Any claims under this warranty must be made within thirty (30) days from date of repair, and all repairs must be made within 30 days from date of failure. All claims not made in writing and received within these time periods specified above shall be denied.

LIMITATIONS ON RESPONSIBILITY

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, AND THERE ARE NO WARRANTIES OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL PALADIN LIGHT ATTACHMENT TOOLS BE LIABLE FOR CONSEQUENTIAL OR SPECIAL DAMAGE.

PALADIN LIGHT ATTACHMENT TOOLS LIABILITY FOR ANY AND ALL LOSSES AND DAMAGES TO BUYER, RESULTING FROM ANY CAUSE WHATSOEVER, INCLUDING NEGLIGENCE, IRRESPECTIVE OF WHETHER SUCH DEFECTS ARE DISCOVERABLE OR LATENT, SHALL IN NO EVENT EXCEED THE PURCHASE PRICE OF THE PARTICULAR PRODUCTS WITH RESPECT TO WHICH LOSSES OR DAMAGES ARE CLAIMED, OR, AT THE ELECTION OF PALADIN LIGHT ATTACHMENT TOOLS THE REPAIR OR REPLACEMENT OF DEFECTIVE OR DAMAGED PRODUCTS.

Warranty Procedures

Upon notification of a problem/failure on a component, please advise the Customer Service Department as to the following:

- Serial number of the attachment
- Description of specific component failure
- Number of hours on Prime Mover
- Comments pertaining to failure from end user

If repair will require parts, **you must refer to warranty consideration** when ordering parts through the Customer Service Department.

Upon receipt of replacement parts or verbal approval from the Customer Service Department to proceed with warranty resolution, all defective parts must be retained for evaluation by the brand. **Failure to retain defective parts will result in cancellation to any warranty consideration.**

If a defective component is deemed necessary to be returned to the brand, a Returned Merchandise Authorization (RMA) number will be issued. All shipping documents should show this number.

If a defective component can be fixed at your location or in the field, please **notify the brand for approved rework authorization**. Send a picture of the defect to the Customer Service Department before proceeding with any other repairs.

Upon completion of the repairs, send all pertinent documentation showing labor hours, material costs, and any other warranty costs as described in the Paladin Attachment Tools Warranty Policy.

Flat rate hours will be quoted by the Customer Service Department for any repair. If problems are encountered that were not addressed originally, the brand must be contacted to obtain authorization for additional labor hours. Each brand cannot be responsible for work performed without prior notification.



Company ID Number: 505216

To be accepted as a participant in E-Verify, you should only sign the Employer's Section of the signature page. If you have any questions, contact E-Verify at 888-464-4218.

Employer Cowin Equipment Co Inc

Tracy Womack

Name (Please Type or Print)	Title
<i>Electronically Signed</i>	02/15/2012
Signature	Date

Department of Homeland Security – Verification Division

USCIS Verification Division

Name (Please Type or Print)	Title
<i>Electronically Signed</i>	02/15/2012
Signature	Date

Information Required for the E-Verify Program

Information relating to your Company:

Company Name:	Cowin Equipment Co Inc
Company Facility Address:	2238 Pinson Valley Parkway Birmingham, AL 35217
Company Alternate Address:	PO Box 10624 Birmingham, AL 35202
County or Parish:	JEFFERSON
Employer Identification Number:	630141942