

BID SUBMITTAL FORM
Alabama County Joint Bidding Program
Heavy Equipment – Bid Item: Track Mount Excavator - Option A-1

Company Name: Warrior Tractor & Equipment Company, Inc.

Address: 6801 McFarland Blvd, Northport, AL 35476

Bid Submitted by: David Schafer
(Name of company representative)

Title: Sales Manager E-mail address: dschafer@warriortractor.com

Phone: 205-339-0300 Fax: 205-333-0101

By submitting this bid, we agree:

Initials

DRS

The equipment model number identified below meets the bid specs for this bid item

That the bid price will be honored for all counties for the period from **January 1, 2026** to **June 30, 2026**.

The equipment will be delivered at the bid price to all counties participating in the joint bid program.

The company acknowledges the freight preparation and delivery price is to be included in the total bid price for the standard machine.

The company representative listed above will be the contact person for purchasing this bid item under the joint bid program.

The bid is accompanied by a current catalog or model specification document for the model number identified below.

The bid is accompanied by a copy of the manufacturer's standard warranty as required in the bid specifications.

The bid includes the E-Verify documentation required by Alabama law.

We comply with, and if awarded the contract, we will comply with, the requirements of Section 41-16-50 and Sections 41-16-160 to -166, Code of Alabama 1975.

If awarded the bid, a performance bond will be provided upon request.

The bid documents include the **Manufacturer's Suggested Retail Price Sheet (MSRP) for the Standard Machine**.

Total Bid Price for Standard Machine: \$ 319,420.00

(Total Bid Price for Standard Machine Includes Freight Preparation, Delivery and Standard Warranty Costs) *

Freight Preparation and Delivery: \$ 7,750.00

(Included in Standard Machine Bid Price)

Manufacturer's Suggested Retail Price for Standard Machine: \$ 426,093.00

Equipment Model #: John Deere 300 P-Tier Excavator

Description: Track Mount Excavator-Option A-1

Signature of company representative submitting bid: David R. Schaff

Title: Sales Manager

* **NOTE:** Award will be made based on the total cost of the **Standard Machine**. The total cost of the standard machine is to include the freight preparation, delivery and standard warranty cost. Freight preparation, delivery will be excluded from the total bid price of the standard machine in determining the percentage discount for any available options.

BID SUBMITTAL FORM: OPTION COST SHEET

By submitting this bid, we agree:

To offer any available options at the percent difference between the Manufacturer's Suggested Retail Price Sheet and the actual bid price on the Standard Machine*

(DRPS)

The bid documents include the **Manufacturer's Suggested Retail Price Sheet (MSRP)** for the Standard Machine

(DRPS)

Equipment Model #: John Deere 300 P-Tier Excavator

Description: Track Mount Excavator-Option A-1

Signature of company representative submitting bid: David R Schafe

Title: Sales Manager

***Note:** The percent difference between the **Manufacturer's Suggested Retail Price Sheet (MSRP)** for the standard machine as specified by these **Bid Specifications** and the actual price bid by the vendor will be calculated to determine the percentage discount to be applied to any available options. The bid price of the freight preparation, delivery cost shall be excluded in determining the percentage discount to be applied to available options. Any individual county may choose to add any available option to the standard machine at the percentage discount at the time of purchase.

BID SPECIFICATIONS FOR TRACK-MOUNTED EXCAVATOR OPTION A-1

GENERAL

These specifications shall be construed as the minimum acceptable standards for a track mounted hydraulic excavator with long undercarriage. Should the manufacturer's current published data or specifications exceed these standards, the manufacturer's standards shall be considered minimum and shall be furnished. All integral parts not specifically mentioned in the scope of these specifications that are necessary to provide a complete working unit shall be furnished. Additionally, the machine offered for bid shall include all standard manufacturers' equipment. The excavator must be a new current production model and shall meet or exceed all EPA and other applicable standards at the time of manufacture.

Use of specific names and numbers in the specifications is not intended to restrict the bidder or any seller or manufacturer, but is intended solely for the purpose of indicating the type, size and quality of equipment considered best adapted to the uses of the counties participating in this joint bid.

BID SUBMITTAL FORM

Each bidder must submit his or her bid on the bid submittal form included in the invitation to bid package. All written warranties to be submitted shall be attached to the bid submittal form.

BID PRICE

The price bid shall include all destination charges, delivery charges, title fees, rebates, and all other applicable costs and refunds.

MANUALS

Each unit shall be provided with one (1) copy of the operator's manual, one [1] repair manual, and one (1) copy of the current parts manual. Units will not be accepted for delivery until the manuals as outlined above are received by the purchaser.

REPLACEMENT PARTS AVAILABILITY

Parts must be available for 5 years or 7,500 hours of use for the piece of equipment. If any replacement parts are not delivered within three (3) working days of an order being placed, the bidder will deliver an equivalent machine for the county to use at no cost to the county until such time as the parts are delivered to the county so it can affect repairs to its machine.

WARRANTY

Bidders shall submit a copy of the manufacturer's standard warranty. Warranty shall include service response time of maximum of 36 hours within notification by county.

Yes No

Page#

or

Attachment

WEIGHT

Minimum 68,000 lbs. equipped with minimum 32 inch wide track shoes.

Yes No _____
Page # 7 _____

ENGINE

Turbocharged, 6 cylinders with a minimum 400 cubic inch displacement diesel engine capable of a minimum 220 net horsepower.

Yes No _____
Page # 6 _____

Engine shall be manufactured by the equipment manufacturer.

Yes No _____
Page # 6 _____

UNDERCARRIAGE

Track length shall be minimum 15' 3".

Yes No _____
Page # 8 _____

Undercarriage Width shall be minimum 11'.

Yes No _____
Page # 8 _____

Track shoe width shall be minimum 32" (Triple grouser Shoes)

Yes No _____
Page # 8 _____

Minimum eight (8) track rollers per side.

Yes No _____
Page # 6 _____

Minimum two (2) carrier rollers per side.

Yes No _____
Page # 6 _____

STARTING SYSTEM

24 volt system with a minimum 100 amp alternator.

Yes No _____
Page # 6 _____

CAPACITIES

Fuel Tank Capacity – 136 gallon minimum

Yes No _____
Page # 7 _____

Hydraulic Tank Capacity – 40 gallon minimum

Yes No _____
Page # 7 _____

Hydraulic System Capacity – 75 gallon minimum

Yes No _____
Page # 7 _____

Engine Coolant – 7 gallon minimum

Yes No _____
Page # 7 _____

BOOM AND STICK

One piece boom with minimum 19' length

Yes No _____
Page # 7 _____

Stick shall be a minimum 10'2" long

Yes No _____
Page #7 _____

DIMENSIONS

Reach at ground level – 33' minimum

Yes No _____
Page #7 _____

Bucket breakout force (SAE) – minimum 39,000 lbs.

Yes No _____
Page #7 _____

Stick digging force (SAE) – minimum 31,000 lbs.

Yes No _____
Page #7 _____

Bucket:

Standard with no bucket. Buckets will be considered optional attachments.

HYDRAULICS

Hydraulic pump output shall be a minimum of 120 GPM

Yes No _____
Page #6 _____

CAB

Enclosed ROPS cab:

Yes No _____
Page #11 _____

Heater

Yes No _____
Page #11 _____

Factory installed air conditioning

Yes No _____
Page #11 _____

AM/FM radio

Yes No _____
Page #11 _____

Suspension seat

Yes No _____
Page #11 _____

Defroster

Yes No _____
Page #11 _____

Shall be equipped with a 12-volt converter capable of powering a two-way radio.

Yes No _____
Page #11 _____

300 P-Tier Excavator



JOHN DEERE

04-Nov-2025

Code	Description	QTY	List Price
04J0FF	300 P-Tier Excavator	1	US\$419,636.00 USD

300 P-tier Standard Equipment

HYDRAULICS:

Open Center, Load Sensing with Variable Displacement Pumps
Hydraulic Pilot Controls
Axial Piston Swing Motor
Multiple Wet Disk Swing Brake
Auxiliary Valve Section
Adjustable Flow for Attachments Through Monitor
Boom and Arm Reduced Drift Valves
Auto Power Lift
Hydraulic Tank Site Gauge
5,000 Hour Hydraulic Oil Change Interval
Hydraulic Oil Sampling Valve
Inline DEF Filter

UNDERCARRIAGE:

32 In. (800 mm) Triple Grouser Shoes
Two Speed Propel with Auto-Shift
Axial Piston Propel Motors
Propel Motor Shields
Planetary Final Drives
Sealed Track Chain
Front and Center Track Guides
Provisions for Tie Downs
X-Frame Car Body
Hydraulic Track Adjuster
Eight Lower Rollers
Two Upper Rollers
Spring Applied Hydraulic Released Propel Brake

UPPER STRUCTURE:

Right, Left and Counterweight Mirrors
Toolbox
Vandal Locks for:
Cab Door
Service Doors
Tool Box
Counterweight, 12346 lbs. (5,600 kg)
Work Lights:
One Mounted on Frame
One Mounted on Boom
Debris Screening Side Panel
Remote Mounted Engine Oil and Fuel Filters
Handrails

FRONT ATTACHMENT:

Steel Bushings
Thrust Plates
Tungsten Carbide Thermal Coating on arm to Bucket Joint
Centralized Lubrication System
Dirt Seals on Bucket Pins
Less Boom
Less Arm
Less Bucket

OPERATOR'S STATION:

Adjustable Control Positions (Levers to Seat, Seat to Pedals)
4" Arm Rests Attached to Side Consoles
Pilot Control Shut-Off Lever
Short Stroke, Low Effort Pilot Levers
Switches for Auxiliary Hydraulic Control on RH Pilot Lever
Deluxe Adjustable Cloth Seat with Suspension, Reclining Backrest, Headrest, and Adjustable Lumbar Support
Multifunction, Color LCD Monitor System with:
Diagnostic Capability
Systems Monitoring Capability
Multiple Language Capability
Maintenance Tracking
Control Pattern Changer
Engine Coolant Temperature Gauge
Engine Coolant Temperature Warning Indicator with Audible Alarm
Engine Oil Pressure Warning Indicator with Audible Alarm
Fuel Gauge with Low Fuel Indicator
Diesel Exhaust Fluid Gauge
Work Mode Indicator
Auto Idle Indicator
Alternator Charge Indicator
Air Filter Restriction Indicator
Fault Code Alert Indicator
Check Engine Indicator
Wiper Mode Indicator
Work Lights On Indicator
Fuel Rate Display
Clock
Hour Meter
Mode Selection:
One Work Mode
Three Power Modes
Numerous Attachment Modes
Auto-Climate Control/Air Conditioner, Heater with Pressurizer
AM-FM Radio
USB Charge Port
Pilot Lever Lock
Rear View Camera
Machine Information Center (MIC)
Windshield Wiper/Washer with Intermittent Speed
12V-60W, 5 Amp Cell Phone Power Outlet
3 In. Retractable Seat Belt
Tinted Safety Glass
Hot/Cold Box Compartment
Horn
Two Cup Holders
Interior Light
Coat Hook
Floor Mat
Motion Alarm with Cancel Switch
Transparent Tinted Roof Hatch with Sunshade
Four Fluid-Filled Elastic Mounts
Easy Access Air Conditioning Filter

Basic Factory Options - Required

Destination Codes

0202	United States	No Added Cost
------	---------------	---------------

Operator's Manual and Decals

0259	English	No Added Cost
------	---------	---------------

Trim Packages

0601	Level 1	No Added Cost
------	---------	---------------

Includes:

- Seat, Standard Mechanical
- Standard Front LED Worklights

0602	Level 2	US\$1,722.00
------	---------	--------------

Includes:

- Seat, Heated Air-Suspension
- Standard Front LED Worklights

0603	Level 3	US\$4,629.00
------	---------	--------------

Includes:

- Seat, Heated Air-Suspension
- Deluxe Front LED Worklights
- Chrome Exhaust

0604	Level 4	US\$5,920.00
------	---------	--------------

Includes:

- Seat, Premium Leather – Thermal Heating and Active Cooling
- Deluxe Front LED Worklights
- Chrome Exhaust

Vision System

1100	Rear Camera System	(US\$1,443.00)
------	--------------------	----------------

1101	Right, Rear and Left Camera System	No Added Cost
------	------------------------------------	---------------

Includes:

- Right, Rear and Left LED Lighting

1103	Right, Rear and Left Camera System w/Bucket Camera	US\$2,741.00
------	--	--------------

Includes:

- Right, Rear and Left LED Lighting
- Bucket Camera System

Machine Connectivity

170K	JDLink™	No Added Cost
------	---------	---------------

Includes integrated cab wiring harness, antenna, and JDLink Modem (MTG).

JDLink connectivity is enabled separately through the JDLink website. Connectivity service is subject to country availability.

Grade Systems

2000	Less Grade Reference Ready Mounts	No Added Cost
------	-----------------------------------	---------------

2001	Grade Reference Ready Mounts	US\$1,555.00
------	------------------------------	--------------

Includes:

- Mounting points on bucket link, arm and boom for third-party grade reference sensors.
- Sensors, manufacturing specific mounts, wiring harness and monitor to be purchased separately from third-party suppliers (e.g. Topcon, Trimble, Leica).

Engine

4068	John Deere PowerTech PSS 6.8L meets FT4/EU Stage IV Emissions	No Added Cost
------	---	---------------

Boom

6665 Less Boom, Less Boom Cylinders (US\$29,721.00)

Recommend: Hyd. Filter Restriction Indicator Kit

6666 Less Boom with Boom Cylinders with plumbing to Main Frame (US\$7,553.00)

Boom Not Included

Recommend: Hyd. Filter Restriction Indicator Kit

6667 One Piece Boom w/Arm Cyl. and Plumbing No Added Cost

6.2 M (20 ft 4 in) Boom

Am

6715 Less: Arm (US\$14,640.00)

If bucket is desired, must order attachment separately

Recommend: Hyd. Filter Restriction Indicator Kit and Indicator Coupler

6717 Arm: Standard No Added Cost

3.1 M (10 ft 2 in) Arm with Bucket Cylinder and Linkage

6719 Arm: Long US\$4,624.00

3.7 M (12 ft 2 in) Arm with Bucket Cylinder and Linkage

Lower Frame Bottom Covers

6630 Less: Lower Frame, Bottom Cover No Added Cost

Less: track frame under cover

6631 Lower Frame, Bottom Cover US\$619.00

Track frame under cover

Auxiliary Hydraulics

7000	Less: Auxiliary Hydraulics	(US\$8,319.00)
------	----------------------------	----------------

7001	Auxiliary High-Flow Lines with AFL and Auxiliary Relief Pressure Adjustment	US\$5,371.00
------	---	--------------

Includes:

- Combination auxiliary hydraulic piping with dedicated stop valves for each attachment.
- Auxiliary Function Lever (AFL) right-hand joystick for electronic proportional auxiliary control.
- Ability to set, confirm, and adjust the auxiliary relief pressure for an attachment.

Two Pump Combined Flow

7020	Less: Two Pump Combined Flow	No Added Cost
------	------------------------------	---------------

7021	Two Pump Combined Flow	US\$2,082.00
------	------------------------	--------------

Adds the ability to set internally combined pump flow for higher demand attachments.

Hydraulic Coupler Ready

7040	Less: Hydraulic Coupler Ready	No Added Cost
------	-------------------------------	---------------

7041	Hydraulic Coupler Ready Lines and Controls	US\$3,767.00
------	--	--------------

- Adds dedicated hydraulic lines and control circuit for hydraulic quick coupler installations.

Track Shoes

5707	700mm (28 in) Steel Track with Triple Semi-Grouser Shoes	(US\$1,249.00)
------	--	----------------

Recommended for general conditions and soft terrain.

5710	800mm (32 in) Steel Track with Triple Semi-Grouser Shoes	No Added Cost
Recommended for extremely soft terrain.		
	Buckets	
7800	Less: Bucket	No Added Cost
7813	36 In. Heavy Duty Bucket w/ Teeth	US\$12,695.00
36 Inch (900mm) 1.11 Cubic Yard (0.85 Cubic Meter) Heavy Duty Bucket. Includes Five (5) TK300 Series Teeth.		
7814	42 In. Heavy Duty Bucket w/ Teeth	US\$14,533.00
42 Inch (1050mm) 1.36 Cubic Yard (1.04 Cubic Meter) Heavy Duty Bucket. Includes (5) TK400 Series Teeth.		
7815	48 In. Heavy Duty Bucket w/ Teeth	US\$16,015.00
48 Inch (1220mm) 1.60 Cubic Yard (1.22 Cubic Meter) Heavy Duty Bucket. Includes Six (6) TK400 Series Teeth.		
7816	54 In. Heavy Duty Bucket w/ Teeth	US\$16,524.00
54 Inch (1375mm) 1.85 Cubic Yard (1.41 Cubic Meter) Heavy Duty Bucket. Includes Six (6) TK400 Series Teeth.		

Basic Factory Options - Optional

	Filter	
8124	Fuel Filter, Severe-Duty	US\$188.00
Recommended for harsh conditions.		
	Single Pedal Propel	
8261	Single Pedal Propel	US\$2,432.00

Additional pedal for tracking both tracks simultaneously in the same direction

Shipping Preparation

8262	Special Export Preparation– Do not install front for shipping	No Added Cost
------	---	---------------

Cold Weather Package

8500	Cold Weather Package	US\$646.00
	Includes Engine Block Heater	

Debris Package

8501	Debris Package	US\$2,691.00
	Includes Reversing Electric Variable Speed Fan Drive and Engine Air Centrifugal Pre-Cleaner	
	- Reversing fan features selectable intervals and manual override.	
	- For use in environments with airborne debris.	

Field Installed Attachments - Optional

Hydraulics

AT327659	Anti-Drift Valve with Plumbing and Hardware, Arm Cylinder	US\$3,131.00
----------	---	--------------

AT390776	Single Pedal Propel Kit	US\$2,143.00
----------	-------------------------	--------------

AT445803	Hydraulic Filter Restriction Indicator Kit	US\$797.00
----------	--	------------

BYT12888	Auxiliary High-Flow Lines for 3.7 M Long Arm	US\$5,150.00
----------	--	--------------

BYT13167	Two-Pump Combined Flow Piping	US\$1,945.00
BYT13479	Right Handle Joystick for Aux Hydraulic Control	US\$300.00
BYT13228	Control Solenoids for 2-Way Auxiliary Hydraulics	US\$1,000.00
<hr/>		
Operator Environment		
BYT11141	Full Length Front Guards	US\$3,509.00
<hr/>		
Guards		
AT390802	Cab FOPS Guard	US\$4,680.00
<hr/>		
G.R.Mfg.		
BYT11004	Auxiliary Counterweight, 2250 lbs.	US\$12,900.00
<hr/>		
ETN210311	Front Window Guard, Polycarbonate	US\$3,982.00
<hr/>		
Hydraulic Couplers		
AT452019	Hydraulic Quick Coupler (Non-Variable type) - Coupler and Controls Kit	US\$13,591.00
<hr/>		
BYT11633	Hydraulic Quick Coupler Controls Kit, (Variable-type Pin-Grabber) - Controls Kit Only	US\$1,774.00

BYT12950	Hydraulic Quick Coupler (Variable-type Pin-Grabber) 250-345 - Coupler Only	US\$12,722.00
BYT13151	Hydraulic Coupler Ready - Variable Type Pin-Grabber Coupler, Install Included, 250-300 Size Excavator	US\$13,286.00
BYT12889	Hydraulic Coupler Ready Pressure Reducing Valve	US\$1,000.00
Overall Vehicle		
BYT12324	Electric Reversing Fan Switch Kit	US\$1,750.00
BYT11005	Vandal Cover Kit	US\$3,053.00
Booms & Arms		
BYT13944	Top Hat Bushing Upgrade Kit	US\$682.00
Buckets, Side Cutters		
AT342512	Side-Cutter Kit, 3 inch	US\$1,154.00
AT342513	Side-Cutter Kit, 6 inch	US\$1,154.00

BYT13090	Hydraulic Thumb Kit, Direct, 250-345 Size Excavator	US\$11,967.00
----------	---	---------------

BYT13091	Hydraulic Thumb Kit, Direct for Couplers, 250-345 Size Excavator	US\$12,465.00
----------	--	---------------

BYT13092	Hydraulic Thumb Kit, Progressive, 250-345 Size Excavator	US\$14,254.00
----------	--	---------------

BYT13093	Hydraulic Thumb Kit, Progressive for Couplers, 250-345 Size Excavator	US\$13,684.00
----------	---	---------------

Hydraulic Thumb Kits - Installed

BYT12824	Hydraulic Thumb, Direct, Install Included, 250-345 Size Excavators	US\$15,241.00
----------	--	---------------

BYT12825	Hydraulic Thumb, Direct for Coupler, Install Included, 250-345 Size Excavators	US\$15,739.00
----------	--	---------------

BYT12826	Hydraulic Thumb, Progressive, Install Included, 250-345 Size Excavators	US\$17,528.00
----------	---	---------------

BYT12827	Hydraulic Thumb, Progressive for Coupler, Install Included, 250-345 Size Excavators	US\$16,958.00
----------	---	---------------

Buckets, Heavy-Duty

BYT11162	36 In (914mm), 0.97 Cubic Yard (0.74 Cubic Meter) Heavy-Duty Bucket	US\$10,156.00
----------	---	---------------

BYT11163	42 In (1067mm), 1.19 Cubic Yard (0.91 Cubic Meter) Heavy-Duty Bucket	US\$11,626.00
BYT11164	48 In (1219mm), 1.39 Cubic Yard (1.06 Cubic Meter) Heavy-Duty Bucket	US\$12,812.00
BYT11165	54 In (1372mm), 1.61 Cubic Yard (1.23 Cubic Meter) Heavy-Duty Bucket	US\$13,219.00
BYT11166	60 In (1525mm) 2.09 Cubic Yard (1.60 M3) Heavy-Duty Bucket	US\$14,424.00

Manufacturer's Suggested List Price shown. Retail prices may vary by dealer. Unless stated otherwise, taxes, freight, setup, delivery and other dealer specific charges not included in the pricing. Options/items noted with anything other than price will have additional costs. Pricing, availability, and specifications subject to change without notice. Special program pricing may be available on certain models. See dealer for details. Prices are shown in USD unless otherwise noted.



STANDARD WARRANTY FOR NEW JOHN DEERE CONSTRUCTION, COMPACT CONSTRUCTION (CCE), FORESTRY AND UTILITY PRODUCTS US & CANADA

- **Construction & Forestry Products:** 12 months/unlimited hours (whichever occurs first) Full Machine Standard Warranty
- **Compact Construction Equipment (CCE) Products:** 24 months or 2000 hours (whichever occurs first) Full Machine Standard Warranty
- **C&E Series Pull-Type Scrapers:** 6 months Full Machine Standard Warranty
- **DC & DE Pull-Type Scrapers:** (Model year 2024 and newer) 12 months Full Machine Standard Warranty; 36 months or 10,000 hours (whichever comes first) StructurALL Warranty
- **Scraper Tractors:** 24 Months or 2000 Hours (whichever occurs first) Full Machine Standard Warranty
- **Forestry Attachments:** 12 Months or 2000 Hours (whichever occurs first) Full Machine Standard Warranty

The "Standard Warranty" is part of the warranty protection package available from John Deere Construction & Forestry Company (John Deere Limited in Canada) ("John Deere") to purchasers of new John Deere products ("product").

STANDARD Warranty is John Deere's standard new product warranty, described in this document, provided at no additional charge to the purchaser.

EXTENDED Warranty is a separate repair contract made available by John Deere for purchasers who wish to complement their Standard Warranty coverage. Complete Extended Warranty details, including coverage options and limitations, are set forth in the Application for Extended Warranty, which is available from authorized John Deere dealers.

STRUCTURALL Warranty applies to certain structural components as listed below and as described in this document.

FACTORY-INSTALLED UNDERCARRIAGE Warranty applies to certain undercarriage components as listed below and as described in this document.

A. STANDARD WARRANTY - GENERAL PROVISIONS

John Deere will repair or replace, at its option, any parts (except those specified below) of a new John Deere product that, as delivered to the original retail purchaser(s), are defective in material or workmanship. Performance of this warranty will be free of charge for parts and labor, except as otherwise stated below. Standard Warranty applies only to purchases from John Deere and authorized John Deere dealers and, except as otherwise provided in the next sentence and section L below, is extended only to the original retail purchaser of the product. Remaining Standard Warranty applicable to a used John Deere product is transferred to a subsequent purchaser of the product only if the subsequent purchaser requests a transfer from an authorized John Deere dealer before the product's Standard Warranty expires. Coverage begins on the date of delivery of the product to the original retail purchaser. For purposes of this warranty, a product that has been rented, used for demonstration purposes for 150 or more hours, or otherwise used prior to its original retail purchase has been "used" for the total duration of such use. Warranty statements required by law covering engine emissions-related parts and components are found on a separate written warranty certificate provided to the purchaser at the time of the original retail purchase.

B. WHAT IS COVERED BY STANDARD WARRANTY

All parts of a new John Deere product (except those noted in Sections D and E below) are covered during the Standard Warranty period set out above.

C. EXCLUSIVE REMEDY

The repair or replacement of covered parts or components that are defective, as provided in Sections A, B, D.2 and D.3 herein, shall be the purchaser's exclusive remedy for any defect in the product. However, if after repeated attempts such repair or replacement fails to correct the performance problem caused by the defect, the purchaser's sole remedy shall be a refund of the amount paid for the product (in exchange for a return of the product), excluding any transportation charges, license fees, taxes and insurance premiums, and less a reasonable allowance for use of

the product prior to its return. In no event will the dealer, John Deere or any company affiliated with John Deere be liable for any incidental or consequential damages, including but not limited to loss of profits, rental of substitute equipment or other commercial loss. Correction of defects in the manner provided above shall constitute fulfillment of all liabilities of the Dealer, John Deere, or any company affiliated with John Deere to the purchaser or any other person, whether based upon contract, tort, strict liability, or otherwise. This limitation does not apply to claims for personal injury.

A. ITEMS COVERED SEPARATELY -

1. Standard Warranty does not apply to batteries, radios, tires, cameras, or to Cummins, MTU or Detroit Diesel Engines installed in John Deere products, which are covered by separate written warranties.
2. Factory-Installed Undercarriage Warranty covers all non-rubberized factory-installed undercarriage wear components for 3 years or 4,000 hours from the date of delivery to the original retail purchaser, whichever occurs first (unless terminated earlier under Section F, below). For purposes of this warranty, a product that has been rented, used for demonstration purposes for 150 or more hours, or otherwise used prior to its original retail purchase has been "used" for the total duration of such use. In addition to the items listed in section E below, Factory-Installed Undercarriage Warranty does not cover: failures due to wear, machine application, maintenance practices, or improper machine configuration; removal and installation labor; transportation or hauling costs; unapproved parts; non-wear items; and rubberized undercarriage components such as rubber tracks. Warranty claims will be pro-rated based upon wear of the failed component and whether track shoe width is approved by John Deere. Factory-Installed Undercarriage Warranty does not apply to Scraper Tractors.
3. StructurALL Warranty for new John Deere Products (except Compact Excavators & Loaders, Skid-Steer Loaders, Compact Track Loaders, Scraper Tractors, Pull-Type Scrapers, and Forestry Attachments, which are not eligible for StructurALL Warranty) begins at the date of delivery to the original retail purchaser and ends (unless terminated earlier under Section F, below) after three (3) years, or 10,000 hours (whichever occurs first). For purposes of this warranty, a product that has been rented, used for demonstration purposes for 150 or more hours, or otherwise used prior to its original retail purchase has been "used" for the total duration of such use. **StructurALL Warranty applies only to the following structural components listed below as installed on the product at the time of original manufacture. If a particular component is not listed below it is not covered by StructurALL Warranty.**

Arm; Articulation Joint (incl. pins & bushings); Bin Frame; Boom; Carbody; C-Frame*; Circle Frame; Coupler (John Deere built ONLY); Dipperstick; Draft Frame; Engine Frame; Equipment Frame; Grapple Arch and Grapple Boom; Loader Arm; Loader Frame; Mainframe; Moldboard Lift Arm; NeverGrease™ Pin Joints [Includes steering pin and bushing joints (standard equipment), roller elements (roller bearings) in bucket to boom joints and sliding elements (bushing) for boom and linkage joints (optional equipment)]; Rollover Protection Structure (ROPS); Side Frame; Swing Frame; Track Frame; Undercarriage Frame; X-Frame; Z-bar loader linkage (including bell crank and bucket driver link); Specialty booms and arms marketed as "heavy duty" by John Deere.

Items Covered by StructurALL for Cut-to-Length Forestry Machines: Front frame (welded assembly); Rear frame (welded assembly); Crane king post with basement; Middle joint frame; Cabin swing frame; Main Boom

StructurALL Warranty does not apply to:

1. Any product used primarily in extreme duty or severe duty applications such as but not limited to: demolition and wrecking, chemical plant (including fertilizer plants), salt mines, steel mill, land fill and transfer stations, scrap handling, scarifying and other applications that are similarly destructive or similarly heavy duty except specialty booms and arms as stated in Section D.3 above.
2. C-Frames on Crawlers equipped with root rakes or used in forestry applications unless equipped with an "extreme duty" reinforcement package.
3. Cut-to-Length Forestry Heads and Slash Bundler Units.
4. Crawlers equipped with optional side booms.
5. Cut-to-Length Forestry, Excavator, and Log Loader swing bearings.
6. Motor Graders equipped with front- or rear-mounted snow wings.

A. ITEMS NOT COVERED -

John Deere is NOT responsible for the following:

1. Freight.
2. Adjustments to compensate for wear, for periodic maintenance or adjustments that result from normal wear and tear.
3. Damage caused by unapproved adjustments (electronic or mechanical) to machine or machine components outside of published specifications including but not limited to engine, hydraulic components and relief valves.
4. Program updates, calibrations, and pressure adjustments.
5. Additional Labor Time - Above Dealer Labor Rate.
6. Additional Cleaning - Above Dealer Labor Rate.
7. Rental Fees.
8. Depreciation or damage caused by normal wear or application, lack of reasonable and proper maintenance, failure to follow operating instructions, misuse, lack of proper protection during storage, vandalism, negligence, collision, expenses to seek reinstatement of warranty following theft or loss of Product, or other accidents.
9. Premiums charged for Overtime Labor.
10. Transportation to and from the dealership.
11. Travel time, mileage, or service calls by the dealer.
12. Non-John Deere components or modifications, Rotobec grapples, and attachments installed aftermarket.
13. Shop supplies and maintenance items such as, but not limited to: filters, fuels, oil, hydraulic fluid, lubricants, coolants, conditioners, shop towels, cleaners and degreasers.
14. Torn, cut, or worn hoses.
15. Wear items, such as, but not limited to: body liner, belts, blades, bulbs, lubricated joints (including pins and bushings), dry brakes, brake linings, dry clutch linings, saw blades, chains, skidder grapple shocks, color marking nozzles, and articulation bumpers.
16. Items such as cutting-edge parts, delimiting knives, bucket teeth and rubber track are not warranted for depreciation or damage caused by normal wear, lack of proper maintenance, misuse, failure to follow operating instructions, the elements or accident.
17. Any defect in a non-covered component, or damage to or failure of a covered component caused by a defect in a non-covered component.
18. Secondary damage which occurs from continued operation of a product after recognition of the occurrence of a failure.
19. Parts supplied by or repairs, maintenance or modifications performed by someone other than an authorized John Deere dealer, including any damage caused by such use of parts, repairs, maintenance, or modifications not performed by an authorized John Deere dealer.
20. The use of "track type" tire chains on Feller Bunchers and Skidders is an unapproved modification. Warranty will be void on these machines using "track type" tire chains.
21. Topping off fluids when fluid levels fall in the range between low and full
22. Parts/Kits not ordered on machine and installed aftermarket. These parts will be covered by any applicable parts warranty.
23. Attachments installed aftermarket – i.e., Winch not installed at factory.
24. Custom options installed outside the factory – i.e., G.R. Manufacturing option packages.
25. Used Products (except as otherwise provided in section L below).
26. Lost or stolen Products.

B. TERMINATION OF WARRANTY -

John Deere is relieved of its obligations under Standard Warranty, StructurALL Warranty, Factory-Installed Undercarriage Warranty and/or Extended Warranty if:

1. The product is modified or altered in ways not approved by John Deere; or
2. Any unapproved or improperly sized attachment is installed on the product. Approval and attachment size shall be at John Deere's sole discretion. (Consult dealer prior to installing attachments or product modification).
3. The product is moved outside the US and/or Canada.

A. PARTS REPLACED UNDER WARRANTY -

Only new or remanufactured parts or components furnished or approved by John Deere, will be used if John Deere elects to repair the product. If any such part or component is defective in material or workmanship when installed in the product, John Deere will repair or replace, as it elects, such defective part or component, provided the defect is reported to an authorized John Deere dealer within 90 days of installation or before expiration of the applicable Standard Warranty, Factory-Installed Undercarriage Warranty and/or StructurALL Warranty whichever is later.

B. TELEMATICS

NOTICE: Products may be equipped with telematics hardware and software ("Telematics") that transmit data to John Deere/ Dealer. Purchaser may deactivate Telematics at www.jdlink.com.

Notwithstanding Purchaser's right, title or interest in the Products, Purchaser agrees that John Deere and Dealer (their affiliates, successors and assigns), without further notice to Purchaser have the right to:

1. Access, use, collect and disclose any data generated by, collected by, or stored in, Products or any hardware or devices interfacing with Products ("Machine Data");
2. Access Machine Data directly through data reporting devices integrated within, or attached to, Products, including Telematics ("Data Reporting Systems"); and
3. Update the Data Reporting Systems software from time to time. Machine Data will only be used in accordance with John Deere's Machine Data Policy, located at www.JohnDeere.com/MachineDataPolicy.

C. OBTAINING WARRANTY SERVICE -

To obtain warranty service, the purchaser must request warranty service from a John Deere dealer authorized to sell the product to be serviced. When making such a request, the purchaser must present evidence of the product's delivery date, make the product available at the dealer's place of business, and inform the dealer in what way the purchaser believes the product to be defective. Standard Warranty, Factory-Installed Undercarriage Warranty and/or StructurALL Warranty repairs may be made in the field if the purchaser and servicing dealer so desire. However, John Deere will not be responsible for any charges (such as dealer travel time, mileage or extra labor) that would not have been incurred had the product been repaired at the dealer's place of business.

D. NO IMPLIED WARRANTY, CONDITIONS OR OTHER REPRESENTATION -

Where permitted by law, neither John Deere nor any company affiliated with it makes any warranties, representations, conditions or promises, express or implied, as to the quality, performance, or freedom from defect of its products, other than those set forth in this document and **NO IMPLIED WARRANTY OF MERCHANTABILITY, CONDITIONS OR FITNESS IS MADE.**

E. NO DEALER WARRANTY -

The selling dealer makes no warranty of its own on any item covered by this warranty and makes no warranty on other items unless the dealer delivers to the purchaser a separate written warranty certificate specifically warranting the item. **The dealer has no authority to make any representation or promise on behalf of John Deere, or to modify the terms or limitations of this warranty in any way.**

F. USED JOHN DEERE PRODUCTS ONLY -

John Deere will transfer remaining Standard Warranty, Factory-Installed Undercarriage Warranty and/or StructurALL Warranty to the purchaser of a used John Deere construction and/or forestry product that has been used for less than the full warranty period provided at the product's original retail purchase. This transfer is not effective until change of ownership is registered by a John Deere dealer. **ALL THE TERMS, INCLUDING LIMITATIONS AND EXCLUSIONS, OF THE JOHN DEERE STANDARD WARRANTY, FACTORY-INSTALLED UNDERCARRIAGE WARRANTY, AND/OR STRUCTURALL WARRANTY ORIGINALLY PROVIDED FOR THE PRODUCT REMAIN IN EFFECT AND APPLICABLE.**



Company ID Number: 513478

Document ID: 00000000000000000000000000000000

THE E-VERIFY PROGRAM FOR EMPLOYMENT VERIFICATION MEMORANDUM OF UNDERSTANDING

ARTICLE I

PURPOSE AND AUTHORITY

This Memorandum of Understanding (MOU) sets forth the points of agreement between the Department of Homeland Security (DHS) and Warrior Tractor & Equipment Co., Inc. (Employer) regarding the Employer's participation in the Employment Eligibility Verification Program (E-Verify). This MOU explains certain features of the E-Verify program and enumerates specific responsibilities of DHS, the Social Security Administration (SSA), and the Employer. E-Verify is a program that electronically confirms an employee's eligibility to work in the United States after completion of the Employment Eligibility Verification Form (Form I-9). For covered government contractors, E-Verify is used to verify the employment eligibility of all newly hired employees and all existing employees assigned to Federal contracts or to verify the entire workforce if the contractor so chooses.

Authority for the E-Verify program is found in Title IV, Subtitle A, of the Illegal Immigration Reform and Immigrant Responsibility Act of 1996 (IIRIRA), Pub. L. 104-208, 110 Stat. 3009, as amended (8 U.S.C. § 1324a note). Authority for use of the E-Verify program by Federal contractors and subcontractors covered by the terms of Subpart 22.18, "Employment Eligibility Verification", of the Federal Acquisition Regulation (FAR) (hereinafter referred to in this MOU as a "Federal contractor with the FAR E-Verify clause") to verify the employment eligibility of certain employees working on Federal contracts is also found in Subpart 22.18 and in Executive Order 12989, as amended.

ARTICLE II

FUNCTIONS TO BE PERFORMED

A. RESPONSIBILITIES OF SSA

1. SSA agrees to provide the Employer with available information that allows the Employer to confirm the accuracy of Social Security Numbers provided by all employees verified under this MOU and the employment authorization of U.S. citizens.
2. SSA agrees to provide to the Employer appropriate assistance with operational problems that may arise during the Employer's participation in the E-Verify program. SSA agrees to provide the Employer with names, titles, addresses, and telephone numbers of SSA representatives to be contacted during the E-Verify process.
3. SSA agrees to safeguard the information provided by the Employer through the E-Verify program procedures, and to limit access to such information, as is appropriate by law, to individuals responsible for the verification of Social Security Numbers and for evaluation of the E-Verify program or such other persons or entities who may be authorized by SSA as governed



Company ID Number: 513478

To be accepted as a participant in E-Verify, you should only sign the Employer's Section of the signature page. If you have any questions, contact E-Verify at 888-464-4218.

Employer Warrior Tractor & Equipment Co., Inc.

Stanley McCracken

Name (Please Type or Print)	Title
Electronically Signed	03/01/2012
Signature	Date

Department of Homeland Security – Verification Division

USCIS Verification Division

Name (Please Type or Print)	Title
Electronically Signed	03/01/2012
Signature	Date

Information Required for the E-Verify Program

Information relating to your Company:

Company Name:	Warrior Tractor & Equipment Co., Inc.
Company Facility Address:	6801 McFarland Blvd
	Northport, AL 35476
Company Alternate Address:	P O Box 412
	Northport, AL 35476
County or Parish:	TUSCALOOSA
Employer Identification Number:	630588737



Company ID Number: 513478

North American Industry Classification Systems Code:	423
Administrator:	Warrior Tractor and Equipment Co., Inc.
Number of Employees:	100 to 499
Number of Sites Verified for:	1
Are you verifying for more than 1 site? If yes, please provide the number of sites verified for in each State:	
<ul style="list-style-type: none">• ALABAMA 1 site(s)	

Information relating to the Program Administrator(s) for your Company on policy questions or operational problems:

Name: Stanley N McCracken	Telephone Number: (205) 339 - 0300	Fax Number: (205) 333 - 0101
E-mail Address: wte024@warriortractor.com		

300 V P

Excavator



JOHN DEERE





THE FAST TRACK LOOKS GREAT FROM HERE

With its John Deere PowerTech™ engine and hydraulic system optimized to efficiently deliver plentiful power, our reimagined 300 P-Tier Excavator can help fast-track your bottom line. Enhancements inspired by ideas from real-world customers include Powerwise Plus™ technology that boosts performance on demand, intuitive operating controls, and reliably rugged undercarriage components. Optional camera array with LED-surround lighting plus deluxe LED lights help you see your work like never before. This mid-size muscle was designed to take your operation through the challenges — and accelerate your expectations.

300 P-TIER EXCAVATOR

FEATURES



**NEW INTEGRATED
UNDERCARRIAGE
IDLER & ADJUSTER
EASE GREASING**



Seeing is believing

Optional camera array with LED-surround lighting integrated into the main monitor work together to supplement 270-degree visibility of the area around the machine.

Plan for productivity

Powerwise Plus hydraulic-management system balances engine performance and hydraulic flow for reliable operation. **High productivity** yields more power and faster hydraulic response to move more material. **Power** delivers smooth, balanced metering for normal operation. **Economy** reduces engine rpm and helps save fuel.

Designed to deliver long life

Improved front-joint durability including new bushings on the boom end and foot, better front-piping clamping, and strengthened undercarriage components compared to earlier models help extend uptime and wear life. Larger front-piping diameter and new electric cooling fans improve fuel efficiency by up to five percent.

Underneath it all

New integrated idler and adjuster on the undercarriage of the 300 P-Tier Excavator eases the greasing process. Strengthened idler bearing absorbs the brunt of whatever the track frame encounters, to boost overall wear.

Control you can count on

Ergonomically correct short-throw pilot joysticks enable smooth, precise fingertip control with less movement or effort. Push buttons in the right lever allow predictable control of auxiliary hydraulic flow for operating attachments.

Take a load off

Quiet and spacious cab features standard rearview camera for expansive all-round visibility. Sculpted mechanical-suspension high-back seat slides together or independent of the joystick console to help keep operators comfortably supported.

Now you know

Multi-language LCD monitor and rotary dial provide intuitive access to a wealth of information and functions. Just turn and tap to select work mode, access operating info, check maintenance intervals, source diagnostic codes, adjust cab temperature, and tune the radio.

Get good grades

Grade-reference-ready option includes sensor mounts to help speed installation, eliminating the need to grind, weld, and repaint. Our "open-architecture" design allows you to employ your favorite brand of grade-control system to help maximize productivity and uptime while lowering daily operating costs.

See your work in a new light

Optional deluxe LED lights at cab front and rear, boom, and toolbox shine when your workday extends beyond daylight. Engine-compartment light makes it easy to see daily maintenance points in low-light conditions.

Add some muscle

When the digging gets tough, simply press the standard power-boost button on the right-hand control for more hydraulic muscle.



300 P-TIER EXCAVATOR



Simplify your routine

Large fuel tank and 500- and 5,000-hour engine and hydraulic oil-service intervals decrease downtime for routine maintenance. Fluid-level sight gauges are conveniently located and can be checked at a glance.

Precision Construction

This suite of construction technology delivers **Productivity Solutions** to help you get more done, more efficiently.

In-base JDLink™ connectivity provides machine location, utilization data, and alerts to help you maximize productivity and efficiency. To maximize uptime and lower costs, JDLink also enables **John Deere Connected Support™**. Dealers use Expert Alerts based on data from thousands of connected machines to proactively address conditions that may otherwise likely lead to downtime. Your dealer can also monitor machine health and leverage remote diagnostics and programming capability to further diagnose problems and even update machine software without a time-consuming trip to the jobsite.*

*Availability varies by region. Options not available in every country.

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

Engine	300 P-TIER		
Manufacturer and Model	Base engine for use in U.S., U.S. Territories, and Canada		
Non-Road Emission Standard	John Deere PowerTech™ PSS 6.8L, 6068HTI07		
Net Rated Power (ISO 9249)	EPA Final Tier 4/EU Stage IV		
Cylinders	166 kW (223 hp) at 1,900 rpm		
Displacement	6		
Off-Level Capacity	6.8 L (415 cu. in.)		
Aspiration	70% (35 deg.)		
	Series turbocharged, air-to-air charge-air cooler		
Cooling			
Reversing electric variable-speed fan drive			
Powertrain			
2-speed propel with automatic shift			
Maximum Travel Speed			
Low	3.1 km/h (1.9 mph)		
High	5.2 km/h (3.2 mph)		
Drawbar Pull	25 085 kg (55,303 lb.)		
Hydraulics			
Open center, load sensing			
Main Pumps			
Maximum Rated Flow	2 variable-displacement pumps		
	236 L/m (62.3 gpm) x 2		
Pilot Pump			
Maximum Rated Flow	1 gear		
Pressure Setting	30.2 L/m (8.0 gpm)		
	3900 kPa (566 psi)		
System Operating Pressure			
Circuits			
Implement	34 300 kPa (4,975 psi)		
Travel	35 500 kPa (5,149 psi)		
Swing	33 300 kPa (4,830 psi)		
Power Boost	38 000 kPa (5,511 psi)		
Controls	Pilot levers, short stroke, low-effort hydraulic pilot controls with shutoff lever		
Cylinders			
Boom (2)	Bore	Rod Diameter	Stroke
Arm (1)	135 mm (5.3 in.)	95 mm (3.7 in.)	1422 mm (56.0 in.)
Bucket (1)	150 mm (5.9 in.)	105 mm (4.1 in.)	1659 mm (65.3 in.)
	135 mm (5.3 in.)	90 mm (3.5 in.)	1070 mm (42.1 in.)
Electrical			
Number of Batteries (12 volt)	2		
Battery Capacity	950 CCA		
Alternator Rating	300 amp		
Work Lights	2 LED (1 on left side of boom, 1 on frame)		
Undercarriage			
Rollers (each side)			
Carrier	2		
Track	8		
Shoes, Triple Semi-Grousers (each side)	48		
Track			
Adjustment	Hydraulic		
Guides	2 per side		
Chain	Sealed and lubricated		

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

Ground Pressure 300 P-TIER

Triple Semi-Grouser Shoes

700 mm (28 in.)	50.0 kPa (7.26 psi)
800 mm (32 in.)	43.8 kPa (6.35 psi)

Swing Mechanism

Swing

Speed	10.3 rpm
Torque	90 500 Nm (66,749 lb.-ft.)

Serviceability

Refill Capacities

Fuel Tank	514 L (136 gal.)
Diesel Exhaust Fluid (DEF) Tank	35 L (9.2 gal.)
Cooling System	36 L (9.5 gal.)
Engine Oil With Filter	20.5 L (5 gal.)
Hydraulic Tank	156 L (41 gal.)

Refill Capacities (continued)

Hydraulic System	290 L (77 gal.)
Swing Drive	12 L (12.7 qt.)
Gearbox	
Propel (each)	9.2 L (9.7 qt.)
Pump Drive	1.1 L (1.2 qt.)

Operating Weights

With full fuel tank; 79-kg (175 lb.) operator; 1.44-m³ (1.88 cu. yd.), 1067-mm (42 in.), 1158-kg (2,553 lb.) bucket; 3.76-m (12 ft. 4 in.) arm; 5600-kg (12,346 lb.) counterweight; and 800-mm (32 in.) triple semi-grouser shoes

Operating Weight 31150 kg (68,674 lb.)

Component Weights

Undercarriage With Triple Semi-Grouser Shoes

700 mm (28 in.)	11 478 kg (25,305 lb.)
800 mm (32 in.)	11 881 kg (26,193 lb.)

1-Piece Boom (with arm cylinder)

Arm With Bucket Cylinder and Linkage

3.11 m (10 ft. 2 in.)	1288 kg (2,840 lb.)
3.76 m (12 ft. 4 in.)	1377 kg (3,036 lb.)

Boom-Lift Cylinders (2), Total Weight

1.25-m³ (1.63 cu. yd.), 1065-mm (42 in.)

Heavy-Duty Plate-Lip Bucket

Counterweight, Standard 5600 kg (12,346 lb.)

Operating Dimensions

Arm Length

Arm Digging Force 3.11 m (10 ft. 2 in.) 3.76 m (12 ft. 4 in.)

SAE 138 kN (31,024 lb.) 121 kN (27,202 lb.)

ISO 144 kN (32,372 lb.) 127 kN (28,551 lb.)

Bucket Digging Force

SAE 175 kN (39,342 lb.) 175 kN (39,342 lb.)

ISO 202 kN (45,411 lb.) 202 kN (45,411 lb.)

Lifting Capacity Over Front at Ground Level 23 650 kg (52,139 lb.) 22 600 kg (49,824 lb.)

6.1-m (20 ft. 0 in.) Reach (with power boost)

A Maximum Reach 10.71 m (35 ft. 2 in.) 11.27 m (37 ft. 0 in.)

A' Maximum Reach at Ground Level 10.52 m (34 ft. 6 in.) 11.09 m (36 ft. 5 in.)

B Maximum Digging Depth 7.22 m (23 ft. 8 in.) 7.87 m (25 ft. 10 in.)


B' Maximum Digging Depth at 2.44-m (8 ft. 0 in.) Flat Bottom 7.04 m (23 ft. 1 in.) 7.71 m (25 ft. 4 in.)

C Maximum Cutting Height 10.27 m (33 ft. 8 in.) 10.47 m (34 ft. 4 in.)

D Maximum Dumping Height 7.33 m (24 ft. 1 in.) 7.54 m (24 ft. 9 in.)

E Minimum Swing Radius 3.90 m (12 ft. 10 in.) 3.89 m (12 ft. 9 in.)


F Maximum Vertical Wall 6.48 m (21 ft. 3 in.) 7.05 m (23 ft. 2 in.)

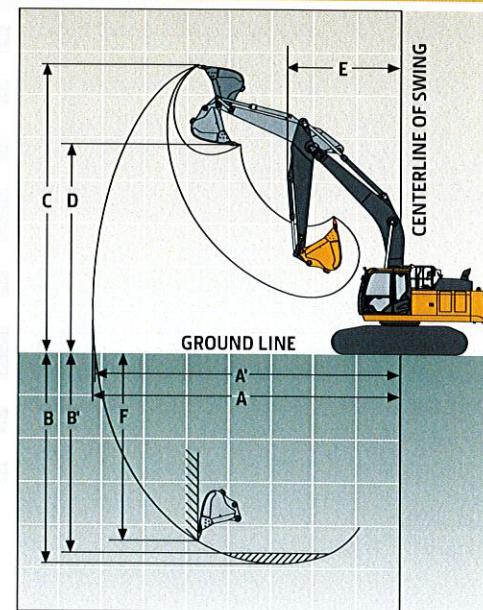

300 P-TIER

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

Machine Dimensions	300 P-TIER	
Arm Length	3.11 m (10 ft. 2 in.)	3.76 m (12 ft. 4 in.)
A Overall Length	10.66 m (35 ft. 0 in.)	10.71 m (35 ft. 2 in.)
B Overall Height	3.20 m (10 ft. 6 in.)	3.38 m (11 ft. 1 in.)
C Tail-Swing Radius	3.25 m (10 ft. 8 in.)	3.25 m (10 ft. 8 in.)
D Distance Between Idler/Sprocket Centerline	4.05 m (13 ft. 3 in.)	4.05 m (13 ft. 3 in.)
E Undercarriage Length	4.94 m (16 ft. 2 in.)	4.94 m (16 ft. 2 in.)
F Counterweight Clearance	1.17 m (3 ft. 10 in.)	1.17 m (3 ft. 10 in.)
G Upperstructure Width	2.99 m (9 ft. 10 in.)	2.99 m (9 ft. 10 in.)
H Cab Height	3.11 m (10 ft. 2 in.)	3.11 m (10 ft. 2 in.)
I Track Width With Triple Semi-Grouser Shoes	700 mm (28 in.) / 800 mm (32 in.)	700 mm (28 in.) / 800 mm (32 in.)
J Gauge Width	2.59 m (8 ft. 6 in.)	2.59 m (8 ft. 6 in.)
K Ground Clearance	0.51 m (20 in.)	0.51 m (20 in.)
L Overall Width With Triple Semi-Grouser Shoes	700 mm (28 in.)	3.29 m (10 ft. 10 in.)
	800 mm (32 in.)	3.39 m (11 ft. 1 in.)
		3.39 m (11 ft. 1 in.)

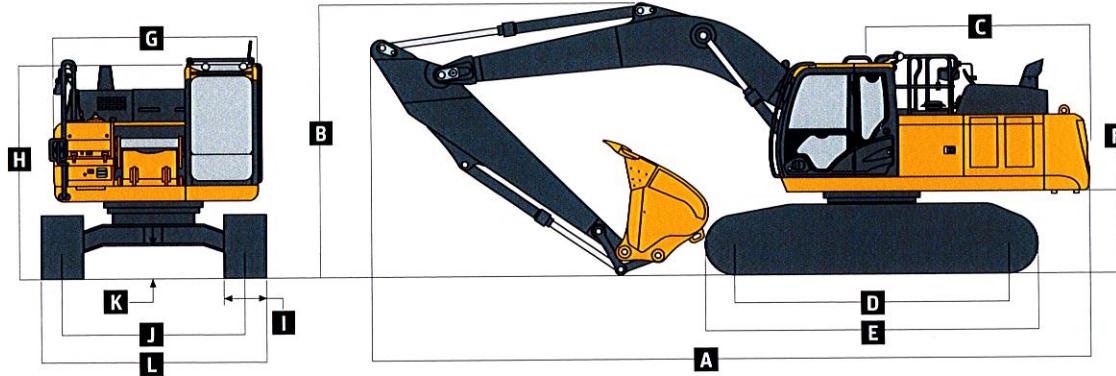

Lift Capacities

Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). Ratings at arm tip; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine. All lift capacities are based on ISO 10567.

HORIZONTAL DISTANCE FROM CENTERLINE OF ROTATION

LOAD POINT HEIGHT	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)	
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
<i>With 3.11-m (10 ft. 2 in.) arm and 700-mm (28 in.) shoes, less bucket</i>												
6.0 m (20 ft.)							7130	7130	6950	6010		
							(15,590)	(15,590)	(15,020)	(12,920)		
4.5 m (15 ft.)					9830	9830	8200	8200	7400	5870		
					(21,160)	(21,160)	(17,800)	(17,800)	(16,160)	(12,640)		
3.0 m (10 ft.)					12 180	11 910	9600	7840	8100	5670		
					(27,550)	(25,730)	(20,800)	(16,920)	(17,630)	(12,220)		
1.5 m (5 ft.)					15 230	11 170	10 920	7460	8690	5470		
					(32,860)	(24,100)	(23,640)	(16,110)	(18,730)	(11,800)		
Ground Line					16 270	10 820	11 770	7210	8530	5320		
					(35,250)	(23,320)	(25,520)	(15,560)	(18,370)	(11,480)		
-1.5 m (-5 ft.)	6810	6810	10 250	10 250	16 200	10 740	11 800	7100	8450	5250		
	(15,250)	(15,250)	(23,240)	(23,240)	(35,150)	(23,130)	(25,390)	(15,320)	(18,220)	(11,350)		
-3.0 m (-10 ft.)	11 900	11 900	16 480	16 480	15 200	10 830	11 440	7130				
	(26,690)	(26,690)	(37,430)	(37,430)	(32,930)	(23,320)	(24,740)	(15,390)				
-4.5 m (-15 ft.)			17 660	17 660	12 940	11 080	9560	7330				
			(38,020)	(38,020)	(27,800)	(23,890)	(20,250)	(15,860)				

Lift Capacities (continued)

300 P-TIER

Boldface type indicates hydraulically limited capacity; **lightface type** indicates stability-limited capacities, in kg (lb.). Ratings at arm tip; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine. All lift capacities are based on ISO 10567.

LOAD POINT HEIGHT	HORIZONTAL DISTANCE FROM CENTERLINE OF ROTATION											
	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)	
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
<i>With 3.11-m (10 ft. 2 in.) arm and 800-mm (32 in.) shoes, less bucket</i>												
6.0 m (20 ft.)							7130	7130	6950	6070		
							(15,590)	(15,590)	(15,020)	(13,060)		
4.5 m (15 ft.)					9830	9830	8200	8200	7400	5930		
					(21,160)	(21,160)	(17,800)	(17,800)	(16,160)	(12,780)		
3.0 m (10 ft.)					12 180	12 040	9600	7920	8100	5730		
					(27,550)	(26,000)	(20,800)	(17,110)	(17,630)	(12,360)		
1.5 m (5 ft.)					15 230	15 230	10 920	10 920	8790	8790		
					(32,860)	(24,380)	(23,640)	(16,290)	(18,950)	(11,940)		
Ground Line					16 270	10 950	11 770	7290	8630	5380		
					(35,250)	(23,600)	(25,520)	(15,740)	(18,590)	(11,620)		
-1.5 m (-5 ft.)	6810	6810	10 250	10 250	16 200	10 870	11 940	7190	8550	5320		
	(15,250)	(15,250)	(23,240)	(23,240)	(35,150)	(23,410)	(25,690)	(15,510)	(18,440)	(11,490)		
-3.0 m (-10 ft.)	11 900	11 900	16 480	16 480	15 200	10 960	11 440	7210				
	(26,690)	(26,690)	(37,430)	(37,430)	(32,930)	(23,590)	(24,740)	(15,580)				
-4.5 m (-15 ft.)			17 660	17 660	12 940	11 210	9560	7410				
			(38,020)	(38,020)	(27,800)	(24,170)	(20,250)	(16,050)				
<i>With 3.76-m (12 ft. 4 in.) arm and 700-mm (28 in.) shoes, less bucket</i>												
6.0 m (20 ft.)								6230	6110			
								(13,710)	(13,150)			
4.5 m (15 ft.)							7350	7350	6770	5950	5250	4430
							(15,980)	(15,980)	(14,800)	(12,820)	(10,350)	(9,530)
3.0 m (10 ft.)							11 420	11 420	8830	7970	7560	5720
							(24,570)	(24,570)	(19,130)	(17,200)	(16,460)	(12,350)
1.5 m (5 ft.)							14 200	11 380	10 300	7540	8380	5500
							(30,650)	(24,550)	(22,310)	(16,280)	(18,220)	(11,860)
Ground Line					6500	6500	15 380	10 870	11 390	7230	8520	5310
					(14,830)	(14,830)	(34,260)	(23,430)	(24,700)	(15,600)	(18,370)	(11,460)
-1.5 m (-5 ft.)	6480	6480	9930	9930	16 270	10 680	11 770	7060	8400	5200		
	(14,470)	(14,470)	(22,470)	(22,470)	(35,270)	(22,990)	(25,310)	(15,230)	(18,110)	(11,230)		
-3.0 m (-10 ft.)	10 280	10 280	14 490	14 490	15 730	10 690	11 710	7030	8390	5190		
	(23,040)	(23,040)	(32,840)	(32,840)	(34,080)	(23,010)	(25,240)	(15,170)	(18,100)	(11,220)		
-4.5 m (-15 ft.)	14 880	14 880	19 910	19 910	14 100	10 860	10 550	7140				
	(33,500)	(33,500)	(42,940)	(42,940)	(30,390)	(23,410)	(22,640)	(15,430)				
-6.0 m (-20 ft.)						10 530	10 530					
						(22,060)	(22,060)					
<i>With 3.76-m (12 ft. 4 in.) arm and 800-mm (32 in.) shoes, less bucket</i>												
6.0 m (20 ft.)								6230	6180			
								(13,710)	(13,290)			
4.5 m (15 ft.)							7350	7350	6770	6010	5250	4490
							(15,980)	(15,980)	(14,800)	(12,960)	(10,350)	(9,640)
3.0 m (10 ft.)							11 420	11 420	8830	8060	7560	5790
							(24,570)	(24,570)	(19,130)	(17,390)	(16,460)	(12,490)
1.5 m (5 ft.)							14 200	11 510	10 300	7630	8380	5560
							(30,650)	(24,830)	(22,310)	(16,470)	(18,220)	(12,000)
Ground Line					6500	6500	15 830	11 000	11 390	7320	8630	5380
					(14,830)	(14,830)	(34,260)	(23,710)	(24,700)	(15,790)	(18,590)	(11,600)
-1.5 m (-5 ft.)	6480	6480	9930	9930	16 270	10 810	11 900	7150	8500	5270		
	(14,470)	(14,470)	(22,470)	(22,470)	(35,270)	(23,270)	(25,610)	(15,420)	(18,330)	(11,370)		
-3.0 m (-10 ft.)	10 280	10 280	14 490	14 490	15 730	10 810	11 710	7120	8490	5260		
	(23,040)	(23,040)	(32,840)	(32,840)	(34,080)	(23,290)	(25,360)	(15,350)	(18,320)	(11,360)		
-4.5 m (-15 ft.)	14 880	14 880	19 910	19 910	14 100	10 990	10 550	7230				
	(33,500)	(33,500)	(42,940)	(42,940)	(30,390)	(23,690)	(22,640)	(15,620)				
-6.0 m (-20 ft.)						10 530	10 530					
						(22,060)	(22,060)					

300 P-TIER

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.


Buckets

300 P-TIER

A full line of buckets is offered to meet a wide variety of applications. Digging forces are with power boost. Buckets are equipped with John Deere TK-Series Bucket Teeth standard. A variety of teeth are available through John Deere Parts. Optional side cutters add 150 mm (6 in.) to bucket widths. Capacities are SAE heaped ratings.

Type Bucket	Bucket Width		Bucket Capacity		Bucket Weight		Bucket Dig Force		Bucket Pin to		Bucket Pin to Tooth		Number of Teeth
	mm	in.	m ³	cu. yd.	kg	lb.	kN	lb.	mm	in.	mm	in.	
Heavy Duty	915	36	0.85	1.11	983	2,167	198.1	44,527	1449	57	1591	63.6	4
	1067	42	1.04	1.36	1088	2,398	198.1	44,527	1449	57	1591	63.6	5
	1220	48	1.22	1.60	1206	2,660	198.1	44,527	1449	57	1591	63.6	6
	1372	54	1.41	1.85	1284	2,832	198.1	44,527	1449	57	1591	63.6	6
	1524	60	1.60	2.09	1390	3,065	198.1	44,527	1449	57	1591	63.6	7

Bucket Selection Guide*

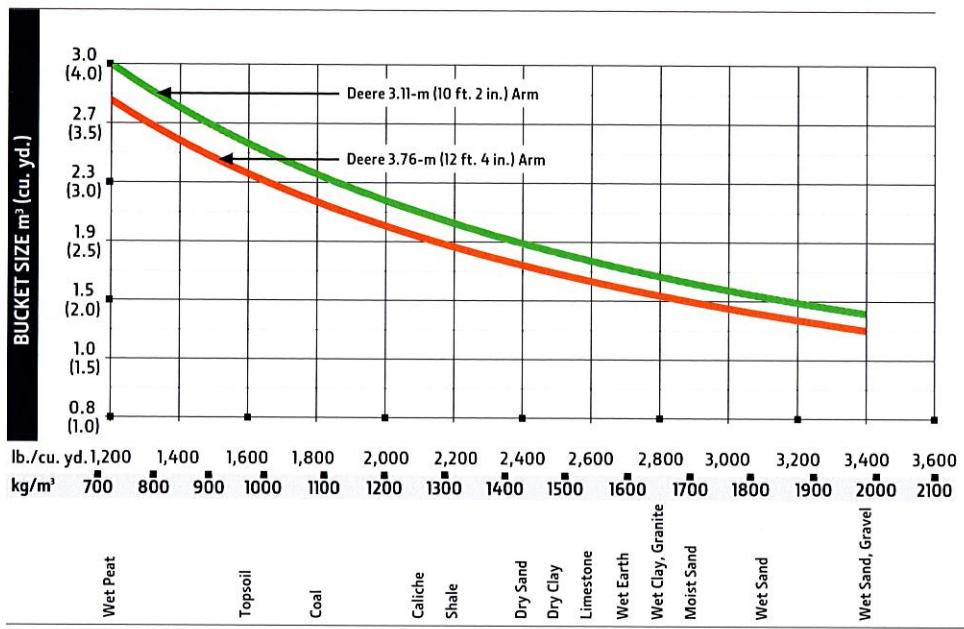

*Contact your John Deere dealer for optimum bucket and attachment selections. These recommendations are for general conditions and average use. Does not include optional equipment such as thumbs or couplers. Larger buckets may be possible when using light materials, for flat and level operations, less compacted materials, and volume loading applications such as mass-excavation applications in ideal conditions. Smaller buckets are recommended for adverse conditions such as off-level applications, rocks, and uneven surfaces. Bucket capacity indicated is SAE heaped.

Additional equipment

Key: ● Standard ▲ Optional or special
See your John Deere dealer for further information.

300 P Engine

- Auto-idle system
- Automatic belt-tension device
- Batteries (2 – 12 volt)
- Coolant recovery tank
- Dual-element dry-type air filter
- Electronic engine control
- Enclosed fan guard (conforms to SAE J1308)
- Engine coolant to -37 deg. C (-34 deg. F)
- Programmable auto shutdown
- Fuel filter with water separator
- Fuel shutoff valve
- Full-flow oil filter
- Turbocharger with charge-air cooler
- ▲ Reversing electric variable-speed fan drive
- Glow-plug start aid
- 500-hour engine-oil-change interval
- 70% (35 deg.) off-level capability
- Engine-oil-sampling valve
- ▲ Chrome exhaust stack
- ▲ Engine coolant heater
- ▲ Engine air precleaner
- ▲ Severe-duty fuel filter

Hydraulic System

- Reduced-drift valve for boom down, arm in
- Auxiliary hydraulic valve section
- Spring-applied, hydraulically released automatic swing brake
- Auxiliary hydraulic-flow adjustments through monitor
- Auto power lift
- 5,000-hour hydraulic-oil-change interval
- Hydraulic-oil-sampling valve
- Control pattern-change valve
- Powerwise Plus™ hydraulic-management system
- ▲ Auxiliary hydraulics with combination piping
- ▲ Auxiliary pilot and electric controls
- ▲ Hydraulic filter restriction indicator kit
- ▲ Load-lowering control / Anti-drift device
- ▲ Single-pedal propel control
- ▲ Dual pump-flow combiner
- ▲ High-flow auxiliary hydraulic lines with dual stop valves

Undercarriage

- Planetary drive with axial piston motors
- Propel motor shields
- Spring-applied, hydraulically released automatic propel brake
- Track guides, front idler and center
- 2-speed propel with automatic shift
- Upper carrier rollers (2)
- Sealed and lubricated track chain
- Heavy-duty undercover
- ▲ Triple semi-grouser shoes, 700 mm (28 in.)
- ▲ Triple semi-grouser shoes, 800 mm (32 in.)

300 P Upperstructure

- Right-hand, left-hand, and counterweight mirrors
- Vandal locks with ignition key: Cab door / Service doors / Toolbox
- Debris screen in side panel
- Remote-mounted engine oil and fuel filters
- ▲ "D" channel guard

Front Attachments

- Centralized lubrication system
- Dirt seals on all bucket pins
- Less boom and arm
- Oil-impregnated bushings
- Reinforced resin thrust plates
- Tungsten carbide thermal coating on arm-to-bucket joint
- ▲ Arm, 3.11 m (10 ft. 2 in.)
- ▲ Arm, 3.76 m (12 ft. 4 in.)
- ▲ Attachment quick-couplers
- ▲ Boom cylinder with plumbing to mainframe for less boom and arm
- ▲ Buckets: Heavy duty / Heavy-duty high capacity / Side cutters and teeth
- ▲ Hydraulic thumb

Operator's Station

- Adjustable independent-control positions (levers-to-seat, seat-to-pedals)
- AM/FM radio
- Auto climate control/air conditioner/heater/pressurizer
- Built-in Operator's Manual storage compartment and manual
- Cell-phone power outlet, 12 volt, 60 watt, 5 amp
- Coat hook
- Deluxe suspension cloth seat with 100-mm (4 in.) adjustable armrests
- Floor mat
- Front windshield wiper with intermittent speeds
- Gauges (illuminated): Diesel Exhaust Fluid (DEF) / Engine coolant / Fuel
- Horn, electric
- Hour meter, electric
- Hydraulic shutoff lever, all controls
- Hydraulic warm-up control
- Interior light
- Large cup holder
- Machine Information Center (MIC)
- Mode selectors (illuminated): Power modes (3) / Travel modes (2 with automatic shift) / Work mode (1)
- Multifunction, color LCD monitor with: Diagnostic capability / Multiple-language capabilities / Maintenance tracking / Clock / System monitoring with alarm features: Auto-idle indicator, engine air cleaner restriction indicator light, engine check, engine coolant temperature indicator light with audible alarm,

300 P Operator's Station (continued)

- engine oil pressure indicator light with audible alarm, low-alternator-charge indicator light, low-fuel indicator light, low DEF indication with audible alarm, fault code alert indicator, fuel-rate display, wiper-mode indicator, work-lights-on indicator, and work-mode indicator
- Motion alarm with cancel switch (conforms to SAE J994)
- Power-boost switch on right console lever
- Auxiliary hydraulic control switches in right console lever
- SAE 2-lever control pattern
- Seat belt, 76 mm (3 in.), non-retractable
- Tinted glass
- Transparent tinted overhead hatch
- Hot/cold beverage compartment
- USB charging port
- ▲ Air-suspension heated seat
- ▲ Hydraulic oil filter restriction indicator light
- ▲ Premium thermally heated and actively cooled leather seat
- ▲ Protection screens for cab front, rear, and side
- ▲ Window vandal-protection covers
- ▲ In-monitor adjustable flow and pressure auxiliary hydraulics with auxiliary function lever (AFL)

Electrical

- 300-amp alternator
- Blade-type multi-fused circuits
- Positive-terminal battery covers
- Battery-disconnect switch
- JDLink™ wireless communication system (available in specific countries; see your dealer for details)
- Rearview camera
- ▲ Right rear left 270-deg. camera system with additional LED surround lighting
- ▲ Cab extension wiring harness

Lights

- Work lights: LED / 1 mounted on left side of boom / 1 mounted on frame

Trim Packages

- **Level 1:** Mechanical seat and standard front LED work lights
- ▲ **Level 2:** Heated, air-suspension seat and standard front LED work lights
- ▲ **Level 3:** Heated, air-suspension seat; deluxe front LED work lights; and chrome exhaust
- ▲ **Level 4:** Premium-leather, thermal-heating, and active-cooling seat; deluxe front LED work lights; and chrome exhaust

Application Packages

- ▲ **Cold-weather package:** Engine-block heater
- ▲ **Debris package:** Engine air centrifugal pre-cleaner and reversing electric variable-speed fan drive with selectable intervals and manual override (for use in airborne-debris environments)

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan, at test conditions specified per ISO 9249. No derating is required up to 3050-m (10,000 ft.) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on a unit with 1067-mm (42 in.) bucket, 5600-kg (12,346 lb.) counterweight, 800-mm (32 in.) triple semi-grouser shoes, full fuel tank, and 79-kg (175 lb.) operator.



ME300PAU (23-01)



JOHN DEERE



6801 McFarland Blvd West
Northport, AL 35476
205-339-0300

66 Industrial Park Drive
Monroeville, AL 36460
251-575-7111

2149 Highway 31 South
Pelham, AL 35124
205-988-4474

4308 Water Trail
Graysville, AL 35073
205-988-4472

3540 Wetumpka Highway
PO Box 210278, Montgomery, AL 36
334-277-7260

25135 One Aviation Way SW
Madison, AL 35756
256-233-1914

2255 Highway 21 South
Oxford, AL 36203
256-831-0921