

**BID SUBMITTAL FORM**  
**Alabama County Joint Bid Program**  
**Heavy Equipment – Bid Item: 21 Ton Wheel Excavator**

Company Name: THOMPSON TRACTOR COMPANY

Address: PO BOX 10367  
BIRMINGHAM AL 35202-0367

Bid Submitted by: JAY SMITH  
(Name of company representative)

Title: SALES OPERATIONS MGR E-mail address: JAYSMITH@THOMPSONTRACTOR.COM

Phone: 205-849-4242 Fax: \_\_\_\_\_

By submitting this bid, we agree:

Initials

The equipment model number identified below meets the bid specs for this bid item

JAS

That the bid price will be honored for all counties for the period from January 1, 2026 to June 30, 2026.

JAS

The equipment will be delivered at the bid price to all counties participating in the joint bid program.

JAS

The company acknowledges the freight preparation and delivery price is to be included in the total bid price for the standard machine.

JAS

The company representative listed above will be the contact person for purchasing this bid item under the joint bid program.

JAS

The bid is accompanied by a current catalog or model specification document for the model number identified below.

JAS

The bid is accompanied by a copy of the manufacturer's standard warranty as required in the bid specifications.

JAS

The bid includes the E-Verify documentation required by Alabama law.

JAS

We comply with, and if awarded the contract, we will comply with, the requirements of Section 41-16-50 and Sections 41-16-160 to -166, Code of Alabama 1975.

JAS

If awarded the bid, a performance bond will be provided upon request.

JAS

The bid documents include the **Manufacturer's Suggested Retail Price Sheet (MSRP)** for the **Standard Machine**.

JAS

Total Bid Price for Standard Machine: \$ 327,443  
(Total Bid Price for Standard Machine Includes Freight Preparation, Delivery and Standard Warranty Costs)\*

Freight Preparation and Delivery: \$ 13,642  
(Included in Standard Machine Bid Price)

Manufacturer's Suggested Retail Price for Standard Machine: \$ 413,986

Equipment Model #: CATERPILLAR M320

Description: WHEELED EXCAVATOR

Signature of company representative submitting bid: 

Title: SALES OPERATIONS MANAGER

\* NOTE: Award will be made based on the total cost of the **Standard Machine**. The total cost of the standard machine is to include freight preparation, delivery and standard warranty cost. Freight preparation and delivery will be excluded from the total bid price of the standard machine in determining the percentage discount for any available options.

## BID SUBMITTAL FORM: OPTION COST SHEET


By submitting this bid, we agree:

To offer any available options at the percent difference between the Manufacturer's Suggested Retail Price Sheet and the actual bid price on the Standard Machine\* 

The bid documents include the Manufacturer's Suggested Retail Price Sheet (MSRP) for the Standard Machine 

Equipment Model #: CATERPILLAR M320

Description: WHEELED EXCAVATOR

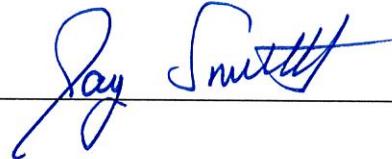Signature of company representative submitting bid: 

Title: SALES OPERATIONS MANAGER

**\*Note:** The percent difference between the Manufacturer's Suggested Retail Price Sheet (MSRP) for the standard machine as specified by these Bid Specifications and the actual price bid by the vendor will be calculated to determine the percentage discount to be applied to any available options. The bid price of the freight preparation and delivery cost shall be excluded in determining the percentage discount to be applied to available options. Any individual county may choose to add any available option to the standard machine at the percentage discount at the time of purchase.

## M320 WHEELED EXCAVATOR

M320	21 TON WHEELED EXCAVATOR	2026 Pricing
623-5774	M320 WHEELED EXCAVATOR CFG4	\$324,465
	553-0169 M320 WHEEL EXCAVATOR	
	553-0170 COMMON ARRANGEMENT	
	558-7123 BOOM, 1PC	
	563-5765 QC CONTROL, PG, 1PC, GRADE	
	558-9523 AUTOLUBE, 1PC	
	559-5055 LINKAGE, BKT, A-LUBE, GRADE	
	583-3846 WIRING, PRODUCT LINK	
	585-8747 COUNTERWEIGHT	
	563-4269 HYDRAULIC OIL, MINERAL	
	581-3651 ALARM, TRAVEL	
	621-9627 LIGHTS, CHASSIS	
	589-1744 RADIO MODULE, PL243 CELLULAR	
553-8758	NO CAT GRADE CONTROL	\$0
558-9532	9'6" STICK	\$5,057
575-1387	1 PIECE BOOM, RIDECONTROL, BLCV & DRIFT VALVE	\$9,250
565-4313	21.7 MPH SPEED	\$0
496-8300	FRONT & REAR OUTRIGGERS	\$31,894
548-1811	NO FENDERS	\$0
474-7236	11.00-20 DUEL BRIDGESTONE TIRES	\$9,499
622-4172	JOYSTICK STEERING AND HIGH PRESSURE CIRCUITS	\$10,132
622-4236	MAIN CONTROL VALVE FOR 1 PIECE BOOM	\$3,469
491-9770	DELUXE CAB	\$10,948
539-9003	2-SLIDER JOYSTICKS	\$2,998
555-7286	NETWORK MANAGER	\$0
563-5769	REAR & RIGHT HAND SIDE CAMERAS	\$936
527-9744	MIRRORS	\$0
521-6833	N.A. DECALS	\$0
0G-9240	STORAGE PROTECTION	\$480
564-8368	AUTOLUBE	\$1,506
650-6846	LINES FOR 2ND HIGH PRESSURE CIRCUIT	\$609
563-5780	QUICK COUPLER STICK LINES	\$1,142
618-5516	JOYSTICK CONTROLLER	\$0
528-6146	GRADE SENSOR	\$0
567-0427	BEACON ON TOP OF CAB	\$360
527-7970	PEDAL	\$1,243
TOTAL BID PRICE FOR STANDARD MACHINE		\$327,443
FREIGHT PREPARATION AND DELIVERY		\$13,642
TOTAL MANUFACTURER'S SUGGESTED RETAIL PRICE FOR STANDARD MACHINE		\$413,986

# BID SPECIFICATIONS FOR 21 TON WHEELED EXCAVATOR

## GENERAL

These specifications shall be construed as the minimum acceptable standards for a 21-ton wheeled excavator. Should the manufacturer's current published data or specifications exceed these standards, the manufacturer's standards shall be considered minimum and shall be furnished. All integral parts not specifically mentioned in the scope of these specifications that are necessary to provide a complete working unit shall be furnished. Additionally, the machine offered for bid shall include all standard manufacturers' equipment. **The wheeled excavator must be a new current production model and shall meet all EPA and other applicable standards at the time of manufacture.**

The use of specific names and numbers in the specifications is not intended to restrict the bidder or any seller or manufacturer but is intended solely for the purpose of indicating the type, size and quality of equipment considered best adapted to the uses of the counties participating in this joint bid.

## BID SUBMITTAL FORM

Each bidder must submit his or her bid on the bid submittal form included in the invitation to bid package. All written warranties to be submitted shall be attached to the bid submittal form.

## BID PRICE

The price bid shall include all destination charges, delivery charges, title fees, rebates, and all other applicable costs and refunds.

## MANUALS

Each unit shall be provided with one (1) copy of the operator's manual, one (1) copy of the repair manual and one (1) copy of the current parts manual. Units will not be accepted for delivery until the manuals as outlined above are received by the purchaser.

## REPLACEMENT PARTS AVAILABILITY

Parts must be available for 5 years or 7,500 hours of use for the piece of equipment. If any replacement parts are not delivered within three (3) working days of an order being placed, the bidder will deliver an equivalent machine for the county to use at no cost to the county until such time as the parts are delivered to the county so it can affect repairs to its machine.

## WARRANTY

Bidders shall submit a copy of the manufacturer's standard warranty. Warranty shall include service response time of maximum of 36 hours within notification by county.

Yes  No   
Page #   
or  
Attachment

## WEIGHT

Minimum 41,400 lbs.

Yes  No   
Page #   
*14*

## ENGINE

Six (6) cylinders, turbo charged, diesel engine with minimum of 171 NET flywheel Horsepower. Displacement minimum of 268 Cu. In.

Yes  No   
Page #   
*14*

Oil and fuel filters of spin-on type, vertically mounted, accessible from ground level

Yes  No   
Page # 2,3,15

Automatic engine speed control

Yes  No   
Page # 15

Factory installed fuel line water separator

Yes  No   
Page # 11

Variable speed on-demand fan type cooling system

Yes  No   
Page # 14,15

**Engine designed and produced by equipment manufacturer**

Yes  No   
Page # 14

### **TRANSMISSION**

Two-speed powershift, all-wheel drive in both speed ranges with creeper speed

Yes  No   
Page # 8,15

Maximum travel speed not less than **21 mph**

Yes  No   
Page # TECH spec p.2

Travel speed lock

Yes  No   
Page # 8

### **HYDRAULICS**

Variable displacement, closed center, load sensing hydraulic system

Yes  No   
Page # 14,15

Minimum **71-gallon** hydraulic oil system (including tank)

Yes  No   
Page # 14

Travel circuit maximum pressure not less than **5,075 psi**

Yes  No   
Page # 14

Implement circuit maximum pressure not less than **5,075 psi**

Yes  No   
Page # 14

High pressure hydraulics circuit capable of powering high speed cutting attachment

Yes  No   
Page # 14,15

Single rocker pedal controls

Yes  No   
Page # 8

### **AXLES/BRAKES**

Front steering axle pivotally mounted to the frame and free to oscillate  
not less than **8°** in either direction

Yes  No   
Page # TECH spec p.2

Minimum Turning Radius (Outside of Tire) **21- ft**

Yes  No   
Page # TECH spec p2

Minimum 14" ground clearance

Yes  No   
Page # 17

Minimum tractive force/drawbar pull **23,380 lb**

Yes  No   
Page # 7007 spec p.2

Automatic brake/axle lock

Yes  No   
Page # 8

### **ELECTRONICS, ELECTRONIC CONTROLS, ELECTRIC SYSTEM**

Electronic fluid level check at machine start-up with operator warning for the following fluids: engine coolant, hydraulic oil

Yes  No   
Page # 10

Lighter/Power Supply

Yes  No   
Page # 15

24 volt electrical starting system

Yes  No   
Page # 15

Alternator rated at not less than 115 amps

Yes  No   
Page # 14

Two 12 Volt Heavy Duty, Maintenance Free Batteries

Yes  No   
Page # 15

Central diagnostic function to record system parameters and faults

Yes  No   
Page # 15

Cab monitor warning display when oil and filter maintenance interval is due

Yes  No   
Page # 10

Cab monitor text warning messages of problems and international fault codes display

Yes  No   
Page # 10

Central diagnostic function to record system parameters and faults

Yes  No   
Page # 15

Master electrical disconnect switch that cuts all electrical power to all circuits

Yes  No   
Page # TECH spec p.7

## BOOM STICK AND PERFORMANCE

One-piece boom with 9'6" minimum stick length

Maximum reach at ground level not less than 30'6"

Yes  No   
Page # TECH Spec  
P. 2,7

Maximum digging depth not less than 19'-0"

Yes  No   
Page # TECH Spec  
P. 2,7

Maximum bucket digging force with standard trenching bucket not less than 30,700 lbs.

Yes  No   
Page # TECH Spec  
P. 7

Maximum stick digging force not less than 20,300 lbs.

Yes  No   
Page # TECH Spec  
P. 7

Maximum lifting capacity at ground level 20' from machine with load over front and two stabilizers down not less than 15,700 lbs.

Yes  No   
Page # TECH Spec  
P. 8

Anti-drift valves for stick and bucket cylinders

Yes  No   
Page # TECH Spec  
P. 1,7

## SWING MECHANISM

Max. Swing Speed not less than 9.2 rpm

Yes  No   
Page # 14

Swing Torque not less than 38,000 ft-lb

Yes  No   
Page # 14

## CAB

Road, tail, and turn lights

Yes  No   
Page # 15

Falling objects guard

Yes  No   
Page # 2,7, TECH Spec P. 7

Suspension seat with lumbar support

Yes  No   
Page # 4

Sliding door window

Yes  No   
Page # TECH Spec A.5,7

Control levers mounted to suspension seat

Yes  No   
Page # 4

Shock reducing dampening mounts

Yes  No   
Page # 4

Factory installed CD/MP3/radio

Yes  No   
Page # 7

Factory installed air conditioning with easy removable primary filter

Yes  No   
Page # 14

All hydraulic controls locked out when console is in raised position.

Yes  No   
Page # TECH spec  
A. 3,7

Console must be in raised position for engine start-up

Yes  No   
Page # TECH spec  
A. 3,7

Back-up alarm

Yes  No   
Page # TECH spec  
A. 3,7

Rear View and side view Cameras

Yes  No   
Page # 3,15

Retractable seat belt

Yes  No   
Page # TECH spec.  
A. 4,7

#### **GENERAL:**

Anti-skid, punched steel star plate covering the entire normal walking surface of the upper structure

Yes  No   
Page # 11

Centralized maintenance and greasing points accessible from ground level

Yes  No   
Page # 10

Wiper and washer for lower windshield

Yes  No   
Page # 10

Fuel capacity not less than 124 gal.

Yes  No   
Page # 14

#### **Bucket:**

**Standard with no bucket. Buckets will be considered optional attachments.**

# M320

SHOVEL EXCAVATOR



---

**Engine Power (ISO 14396:2002)**

129 kW (174 hp)

**Operating Weight Maximum**


21 200 kg (40,740 lbs)

Meets U.S. EPA Tier 4 Final, EU Stage V, and Korea Tier 4 Final emission standards.

**CAT**<sup>®</sup>

# THE NEW CAT® M320 BOOSTING EFFICIENCY

The Cat® M320 Excavator maximizes performance with up to 16 percent more swing torque to get the job done faster. Save time and money with up to 10 percent overall savings in maintenance costs, longer service intervals, and 100 percent daily ground level maintenance. Combined with a comfortable working environment, the M320 keeps you working quickly and efficiently.

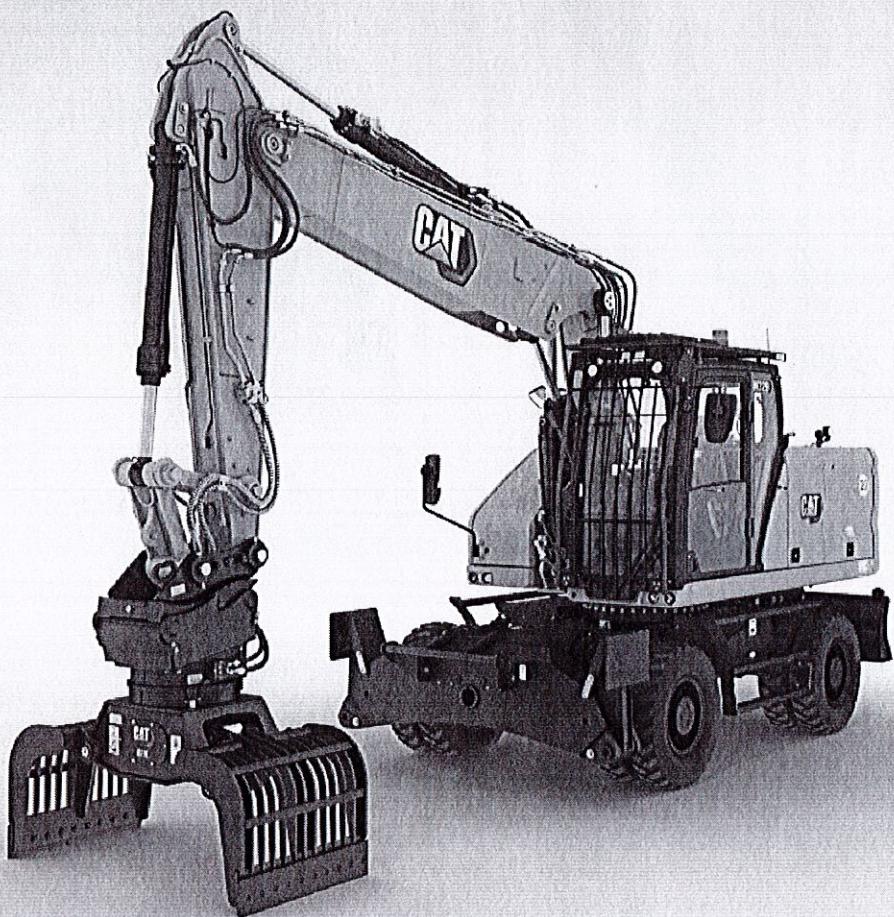

## NEXT GENERATION WHEELED EXCAVATORS


The new line of Cat Excavators offers more choices than ever for your business.

- + LOWER OPERATING AND MAINTENANCE COSTS
- + INCREASED OPERATOR EFFICIENCY AND VISIBILITY
- + MORE IN-CAB COMFORT

Ready to help you make your business stronger, Cat Next Generation Wheeled Excavators give you new ways to get the most work done at a cost that fits your business.



## DO MORE WORK WITH **EXTENDED INTERVALS**

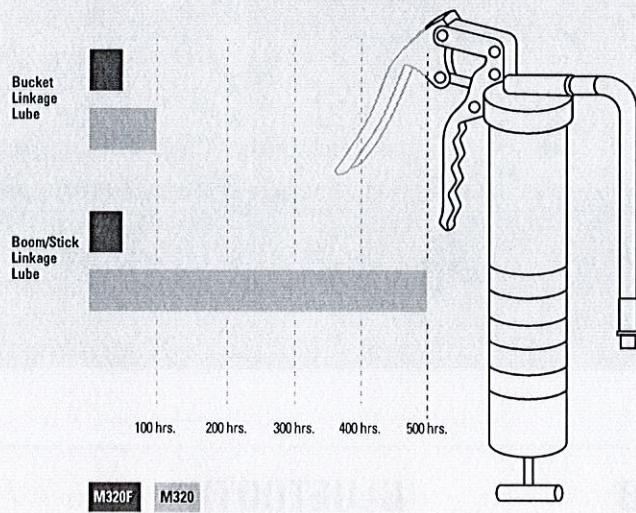

## **MAXIMIZE PERFORMANCE**

Work faster with up to 16 percent more swing torque with lower fuel and DEF consumption. Tiltrotator integration gives you more versatility to complete more tasks faster with one machine.

## **UP TO 10% LOWER MAINTENANCE COSTS**

Fewer maintenance costs, combined with 100 percent daily ground-level maintenance and extended service intervals, increase uptime and keep overall costs down.

## **ENHANCED CAB COMFORT**

Operate comfortably with the ergonomic control layout and cab options. Get better visibility with rear- and side-view cameras and an optional 360° machine view system.

# NEW CAB DESIGN MAKES HARD WORK EASY

Comfort and movement efficiency help keep you productive and alert all shift long. A tip-up left console lets you get in and out of the cab easily, and the standard seat is wide and adjustable for operators of virtually any size.



## ERGONOMIC CONTROL LAYOUT

Controls are easy to reach, allowing you to operate comfortably with minimal twists and turns.

## REDUCED CAB VIBRATIONS

Work more comfortably with reduced cab vibrations from advanced viscous mounts. The standard ROPS cab meets ISO 12117-2:2008 requirements and helps block outside noise.

## BLUETOOTH® CONNECTION

Bluetooth-integrated radio allows for seamless mobile phone connection to listen to music, podcasts, and hands-free calling.

# BOOST YOUR PRODUCTIVITY BY UP TO 45%

WITH SIMPLE-TO-USE INTEGRATED CAT TECHNOLOGY



## OPTIONAL TECHNOLOGIES INCLUDE:



### CAT GRADE WITH 2D

Cat Grade with 2D helps operators reach grade faster. Onboard processors and sensors provide real-time guidance on distance to grade without guesswork. Work safer with fewer ground personnel needed to check the work area for obstacles or grade. All Cat Grade systems are compatible with radios and base stations from Trimble.



### CAT PAYLOAD

Onboard weighing system increases loading efficiency with on-the-go weighing. Combine with VisionLink® to manage your production targets remotely (available for download to USB).


Cat Technology gives you the edge. Operators of all experience levels will dig, load and grade with more confidence, speed, and accuracy to save time and money.

# CAT TECHNOLOGY MORE WORK, LESS TIME



## GET JOBS DONE FASTER WITH LESS REWORK

Cat Grade with Advanced 2D lets you create and edit grade designs with ease on a second high-resolution 240 mm (10 in.) touchscreen monitor. Cat Grade with 3D adds real-time, pinpoint positioning using GPS and GLONASS. Already invested in a grade infrastructure? You can install grade systems from Trimble.

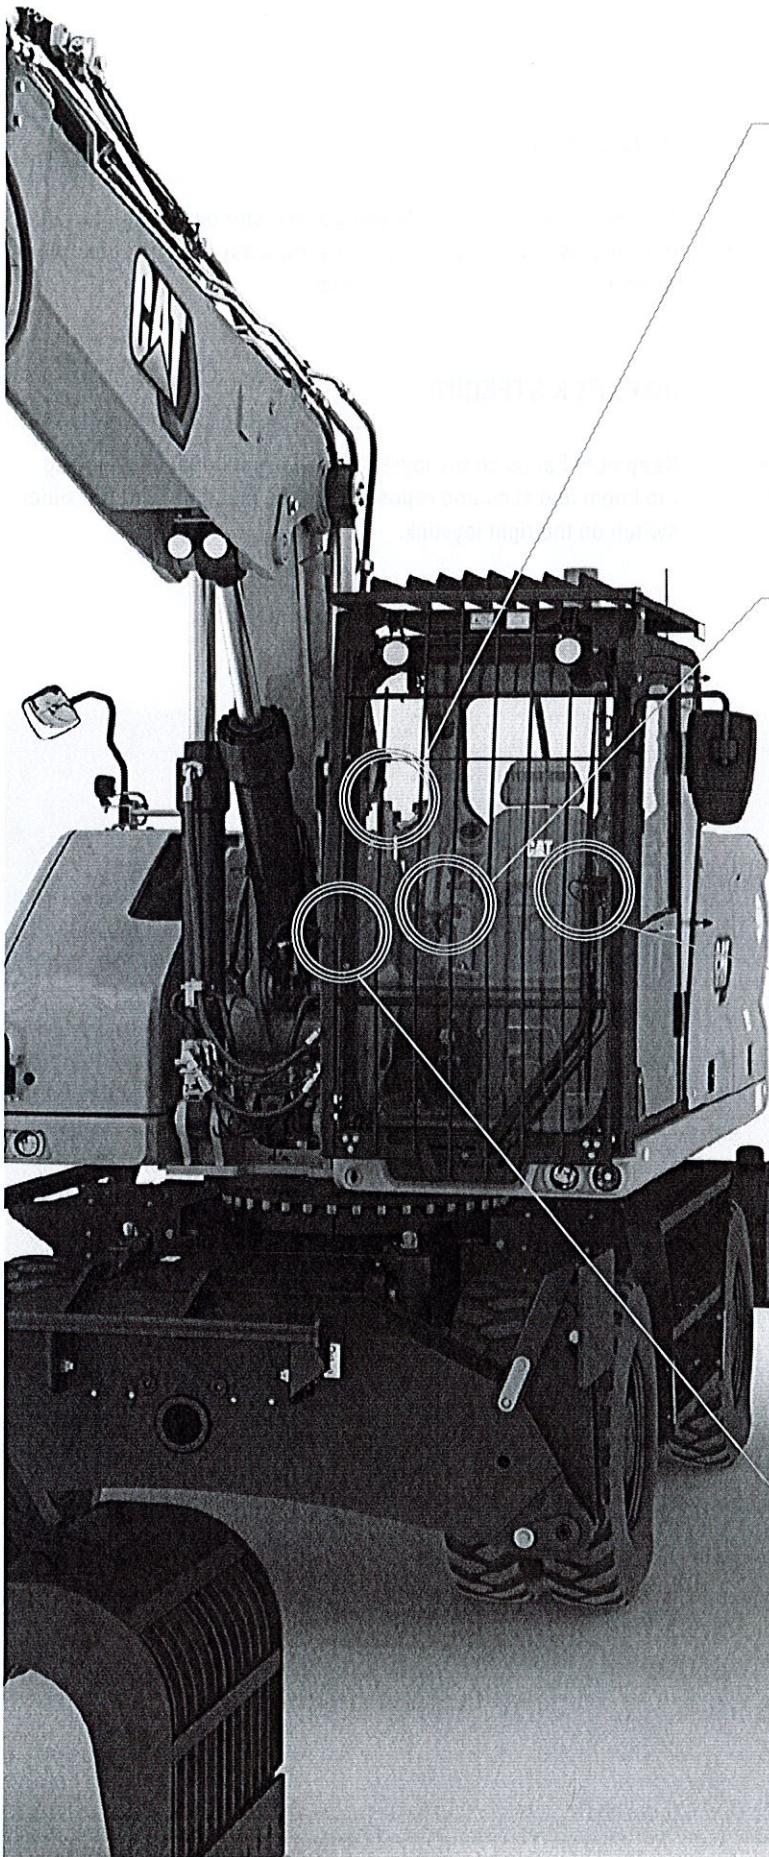

## POWER MODES

Set and store your power mode preference using Operator ID. Owners can lock in the mode they want their operators to use to help manage fuel consumption.



## KEYLESS PUSH TO START

The M320 uses a keyless push-button engine start. This adds security for the machine by using Operator ID codes to limit and track machine access. Codes can be entered manually via an optional Bluetooth key fob.



## CUSTOMIZABLE JOYSTICKS

Joystick function can be customized through the monitor. Joystick pattern as well as response can be set to match operator preference. All preferences are saved with the Operator ID and restored at login.



## TOUCHSCREEN MONITOR

Most machine settings can be controlled through the high resolution 203 mm (8-inch) touchscreen monitor. It offers 42 languages and is easy to read from the seat.

## SMARTBOOM™

SmartBoom lets the boom freely travel up and down without using any pump flow, so operators can focus on attachment control and have a smoother cycle.

## AUTO AXLE LOCK WITH AUTO BRAKE

The axle locks at zero speed and unlocks when the travel pedal is activated. The axle can also be manually locked with a button on the right-hand console. Auto Axle Brake Lock automatically activates the service brake and locks axle oscillation. It is activated when the travel pedal is in neutral and the machine speed is near zero.

## RIDE CONTROL

The ride control system lets you travel faster over rough terrain with improved ride quality. Accumulators act as shock absorbers to help make your journey smoother.

## JOYSTICK STEERING

Keep both hands on the joysticks while simultaneously moving the boom and stick and repositioning the machine with the slider switch on the right joystick.




**WORK MORE EFFICIENTLY  
WITH LESS STRESS**

# EXPAND YOUR JOBSITE CAPABILITIES

WITH MORE SWING TORQUE AND FUEL EFFICIENCY

An increase in swing torque makes traveling, swinging, and working on slopes easy. Backfill trenches and move around your jobsite faster than before – allowing you to be more productive and finish jobs quickly. An advanced hydraulic system provides the optimum balance of power and efficiency while giving you the control you need for precise digging requirements.



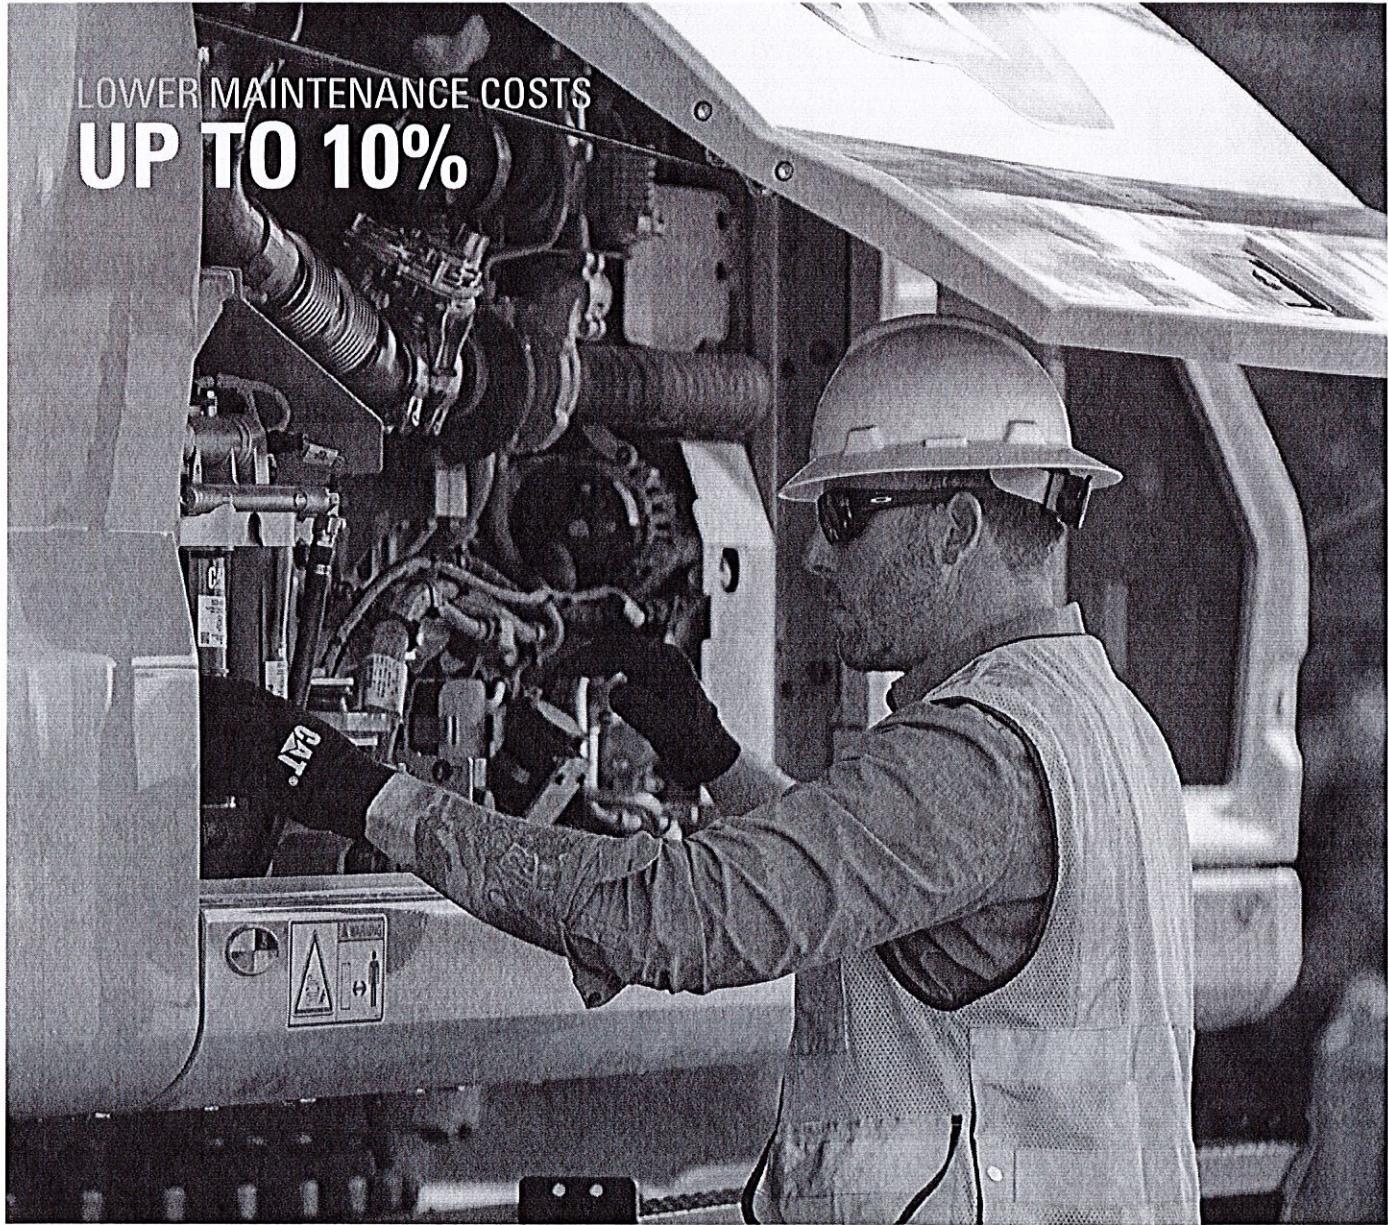

LOWER MAINTENANCE COSTS  
**UP TO 10%**

---

## DO MORE. PAY LESS.

With extended and more synchronized maintenance intervals, you get more done at a lower cost. Consolidated filter locations make service faster.

---

## INFORMATION AT YOUR FINGERTIPS

View operating information such as fuel and oil levels as well as critical service alerts on the in-cab touchscreen monitor. Your machine's filter life and maintenance intervals are also trackable on the in-cab monitor

---

## NEW LONGER-LASTING FILTERS

The new hydraulic oil filter provides improved filtration performance, anti-drain valves to keep oil clean when the filter is replaced, and lasts up to 50 percent longer than previous filter designs.

# SAFETY FEATURES

## LOOK OUT FOR YOUR PEOPLE AND EQUIPMENT

With both visual and audio alerts, the operator is made aware of potential hazards with enhanced visibility and audio alerts. The optional 360° visibility feature allows for enhanced awareness of the surroundings. The operator can also be alerted when approaching other vehicles or structures with the optional rearview camera system.



## GROUND-LEVEL DAILY MAINTENANCE

All daily maintenance checks can be performed from ground level, making maintenance faster, easier, and safer. Checkpoints include the engine oil dipstick, fuel water separator, fuel tank water and sediment drains, and cooling system coolant level check.

## 2D E-FENCE

Optional 2D E-Fence is integrated right out of the factory to prevent the excavator from moving outside operator defined set points.

## UPPER PLATFORM ACCESS

The service platform design provides easy, safe, and quick access to upper platform. The steps use anti-skid punch plate to prevent slipping.

## SECURE START



Use your PIN code on the monitor or the optional Bluetooth key fob to enable the push-button start feature.

## SEE THE JOBSITE AROUND YOU

Enlarged windows and improved machine layout increase visibility from the seat of the cab. Standard rearview and right-side-view cameras always keep operators aware of their surroundings. An optional 360° visibility feature is also available. Powerful, long-lasting LED lights consume minimal power, keeping you safe while working in the dark.

# CAT EQUIPMENT MANAGEMENT TECHNOLOGY TAKES THE GUESSWORK OUT OF MANAGING YOUR EQUIPMENT

Cat Equipment Management telematics technology helps take the complexity out of managing your jobsites by gathering data generated by your equipment, materials, and people and serving it up to you in customizable formats.

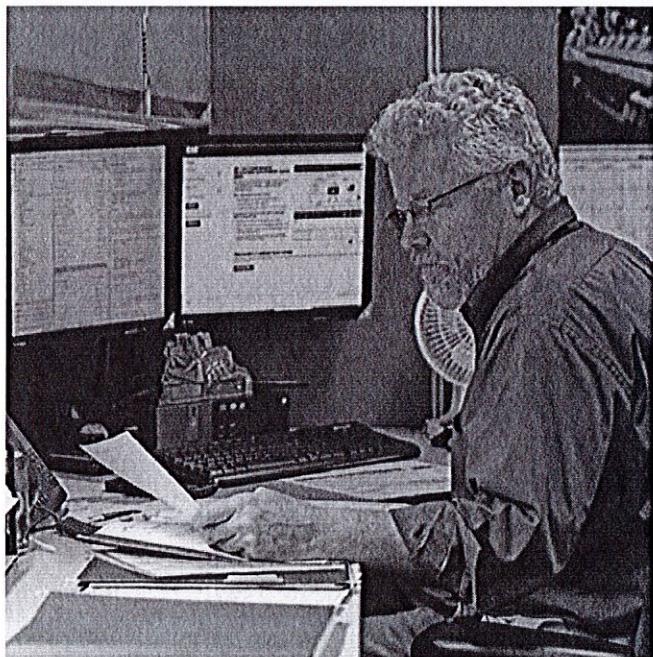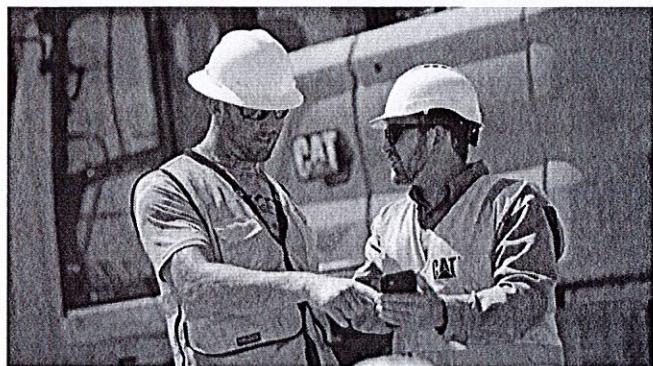

## **PRODUCT LINK™**

Product Link collects data automatically and accurately from your assets – any type and any brand. Information such as location, hours, fuel usage, productivity, idle time, maintenance alerts, diagnostic codes, and machine health can be viewed online through web and mobile applications.

## **VISIONLINK®**

Access information anytime, anywhere with VisionLink. Use it to make informed decisions that boost productivity, lower costs, simplify maintenance, and improve safety and security on your jobsite. With different subscription level options, your Cat dealer can help you configure exactly what you need to connect your fleet and manage your business without paying for extras you don't want. Subscriptions are available with cellular or satellite reporting (or both).

**Remote Services** is a suite of technologies that improve your jobsite efficiency.

**Remote Troubleshoot** allows your Cat dealer to perform diagnostic testing on your connected machine remotely, pinpointing potential issues while the machine is in operation. Remote Troubleshoot helps ensure the technician arrives with the correct parts and tools the first time, eliminating additional trips to save you time and money.


**Remote Flash** updates onboard software to potentially reduce update time by as much as 50 percent. You can initiate the update when convenient, increasing your overall operating efficiency.

The **Cat App** helps you manage your assets – at any time – right from your smartphone. You can see your fleet location, hours, and other information. You will get critical alerts for required maintenance, and you can even request service from your local Cat dealer.


# INCREASE YOUR PRODUCTIVITY AND PROFIT WITH CAT ATTACHMENTS

You can easily expand the performance of your machine by utilizing any of the variety of Cat Attachments. Each Cat Attachment is designed to fit the weight and horsepower of Cat Wheeled Excavators for improved performance, safety, and stability.

BUCKETS

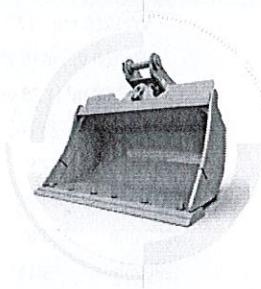

GRAPPLERS

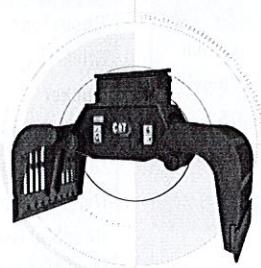


HYDRAULIC HAMMERS




MULTI-PROCESSORS




SHEARS

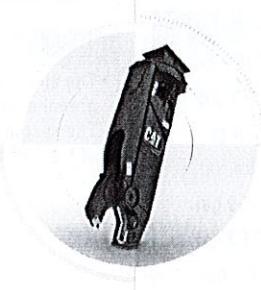

PULVERIZERS

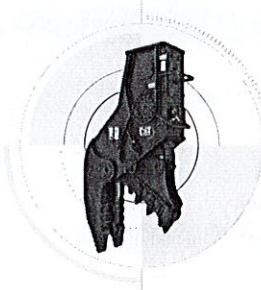

TILOTTATORS

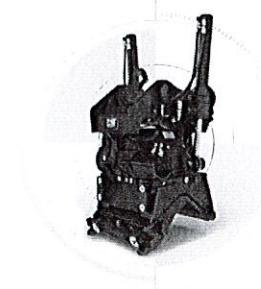

COMPACTORS



COUPLERS



# TECHNICAL SPECIFICATIONS

See cat.com for complete specifications.

ENGINE		
Engine Model		Cat C4.4
Engine Power – ISO 14396:2002	129 kW	174 hp
Engine Power – ISO 14396:2002 (DIN)	176 hp(Ps)	
Net Power – ISO 9249:2007	128 kW	171 hp
Net Power – ISO 9249:2007 (DIN)	174 hp(Ps)	
Bore	105 mm	4 in
Stroke	135 mm	5 in
Displacement	4.4 L	268.5 in <sup>3</sup>
<ul style="list-style-type: none"> <li>Net power advertised is the power available at the flywheel when engine is equipped with fan, air cleaner, CEM exhaust gas aftertreatment, alternator, and cooling fan running at intermediate speed.</li> <li>Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).</li> <li>Rated speed 2,200 rpm.</li> </ul>		

HYDRAULIC SYSTEM		
Main System – Maximum Flow	306 L/min	81 gal/min
Maximum Pressure – Equipment	37 000 kPa	5,366 psi
Maximum Pressure – Travel	35 000 kPa	5,076 psi
Maximum Pressure – Swing	39 500 kPa	5,729 psi

SWING MECHANISM		
Swing Speed	9.2 rpm	
Maximum Swing Torque	52.5 kN·m	38,722 lbf·ft

WEIGHTS		
Operating Weight Minimum	18 800 kg	41,450 lb
Operating Weight Maximum	21 200 kg	46,740 lb

SERVICE REFILL CAPACITIES		
Fuel Tank	470 L	124.2 gal
Diesel Exhaust Fluid (DEF) Tank	30 L	7.9 gal
Cooling System	31.7 L	8.4 gal
Engine Oil	13 L	3.4 gal
Hydraulic Tank	155 L	40.9 gal
Hydraulic System (including tank)	270 L	71.3 gal
Final Drive	2.5 L	0.7 gal

DIMENSIONS		
Boom		VA 5260 mm (17'3")
Stick		Reach 2.5 m (8'2")
Bucket		GD 0.98 m <sup>3</sup> (1.28 yd <sup>3</sup> )
Shipping Height (top of cab)	3370 mm	11'1"
Support Point	3850 mm	11'9"
Shipping Length	8925 mm	29'3"
Tail Swing Radius	2600 mm	8'6"
Counterweight Clearance	1306 mm	4'3"
Ground Clearance	420 mm	1'5"
Undercarriage Length (with blade and outrigger)	5050 mm	16'7"
Wheel Base	2700 mm	8'10"

WORKING RANGES AND FORCES		
Boom Type		VA 5260 mm (17'3")
Stick		Reach 2.5 m (8'2")
Bucket		GD 0.98 m <sup>3</sup> (1.28 yd <sup>3</sup> )
Loading Height	6960 mm	22'10"
Cutting Height	9950 mm	32'8"
Digging Depth	6030 mm	19'9"
Reach at Ground Level	9290 mm	30'6"
Vertical Wall Digging Depth	4230 mm	13'11"
Bucket Forces (ISO)	137 kN	30,799 lbf
Stick Forces (ISO)	92 kN	20,682 lbf
<ul style="list-style-type: none"> <li>Range values are with dual pneumatic tires (10.00-20).</li> <li>Range values are calculated with a GD bucket (CW) and CW-30 quick coupler with a tip radius of 1535 mm (5'0").</li> </ul>		

AIR CONDITIONING SYSTEM		
<ul style="list-style-type: none"> <li>The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 0.85 kg of refrigerant which has a CO<sub>2</sub> equivalent of 1.216 metric tonnes.</li> </ul>		

# STANDARD & OPTIONAL EQUIPMENT

Standard and optional equipment may vary. Consult your Cat dealer for details.

CAB	STANDARD	OPTIONAL	STANDARD	OPTIONAL	
ROPS, sound suppression	•		5650 mm (18'6") one-piece boom	•	
Deluxe Cab		•	5260 mm (17'3") variable adjustable boom	•	
Premium Cab		•	2500 mm (8'2") stick	•	
High-resolution 254 mm (10 in) LCD touchscreen monitor	•		2900 mm (9'6") stick	•	
CAT TECHNOLOGY	STANDARD	OPTIONAL	UNDERCARRIAGE AND STRUCTURES	STANDARD	OPTIONAL
Product Link	•		10.00-20 16 PR, dual tires	•	
Remote Flash/Troubleshoot capability	•		11.00-20- 16 PR, dual tires	•	
Cat Grade with 2D		•	315/70R 22.5, no gap dual tires	• <sup>1</sup>	
Cat Grade with Advanced 2D		•	445/70R 19.5, single tires	•	
Cat Grade with 3D		•	All wheel drive	•	
Cat Payload		•	Automatic brake/axle lock	•	
2D E-Fence		•	3600 kg (7,937 kg) counterweight	• <sup>1</sup>	
Laser Catcher		•	4200 kg (9,259 lb) counterweight	•	
Fenders, front and rear, synthetic		•	Electrical system	STANDARD	OPTIONAL
Power mode selector	•		LED lights on boom and cab	•	
One-touch low idle with auto engine speed control	•		LED lights on chassis (left-hand, right-hand) and counterweight	•	
Auto engine idle shutdown	•		Roading and indicator lights, front and rear	•	
52°C (125°F) high-ambient cooling capacity	•		Maintenance-free batteries	•	
-18°C (0°F) cold start capability	•		Centralized electrical disconnect switch	•	
Double element air filter with integrated precleaner	•		Electrical refueling pump	•	
On-demand electric cooling fans with auto-reverse function	•		SERVICE AND MAINTENANCE	STANDARD	OPTIONAL
Electric fuel priming pump	•		Sampling ports for Scheduled Oil Sampling (S•O•S <sup>SM</sup> )	•	
HYDRAULIC SYSTEM	STANDARD	OPTIONAL	Automatic lubrication system for implement and swing system	•	•
Automatic swing brake	•		SAFETY AND SECURITY	STANDARD	OPTIONAL
Auto hydraulic oil warm up	•		Rear- and right-side-view cameras	•	
Electronic main control valve	•		360° visibility	•	•
Boom and stick drift reduction valves	•		Wide angle mirrors	•	
Boom/stick lowering check valves		•	Ground-level engine shutoff switch	•	
One-slider joysticks	•		Anti-skid plate and countersunk bolts on service platform	•	
Two-slider joysticks		•	Signaling/warning horn	•	
Combined flow/high-pressure auxiliary circuit		•			
Heavy lift mode	•				
Quick coupler circuit	•				
SmartBoom™		•			
Ride control		•			
Cat TRS support		•			
Joystick steering		•			
Separate dedicated swing pump	•				

<sup>1</sup>Europe only.

Not all features are available in all regions. Please check with your local Cat dealer for specific offering availability in your area. For additional information, refer to the Technical Specifications brochures for the M320 available at [www.cat.com](http://www.cat.com) or your Cat dealer.

For more complete information on Cat products, dealer services and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com).

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

© 2021 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, Product Link, SmartBoom, S•O•S, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. VisionLink is a trademark of VirtualSite Solutions LLC, registered in the United States and in other countries.

[www.cat.com](http://www.cat.com) [www.caterpillar.com](http://www.caterpillar.com)

AEXQ3157-01  
Replaces: AEXQ3157-00  
Build Number: 07B  
(Aus-NZ, Eur,  
Korea, N Am)





# M320

## Wheeled Excavator

# Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

### Table of Contents

<b>Specifications</b> .....	<b>2</b>
Engine .....	2
Transmission .....	2
Service Refill Capacities .....	2
Swing Mechanism .....	2
Undercarriage .....	2
Operating Weights .....	2
Major Component Weights .....	3
Hydraulic System .....	3
Tires .....	3
Dozer Blade .....	4
Emissions and Safety .....	4
Standards .....	4
Sound Performance .....	4
Air Conditioning System .....	4
Dimensions .....	5
Undercarriage Dimensions .....	6
Working Ranges .....	7
Lift Capacities:	
Variable Adjustable Boom .....	8
One-Piece Boom .....	16
Bucket Specifications and Compatibility:	
Europe .....	24
North America .....	31
Australia and New Zealand .....	32
South Korea .....	33
Attachments Offering Guide:	
Europe .....	34
North America .....	64
Australia and New Zealand .....	68
South Korea .....	70
<b>Standard and Optional Equipment</b> .....	<b>71</b>
<b>Dealer Installed Kits and Attachments</b> .....	<b>74</b>
<b>Cab Options</b> .....	<b>75</b>



# M320 Wheeled Excavator Specifications

## Engine

Engine Model	Cat® C4.4	
Maximum Gross Power		
ISO 14396	129.4 kW	174 hp
ISO 14396 (metric)	176 hp (PS)	
Maximum Net Power		
ISO 9249	127.8 kW	171 hp
ISO 9249 (metric)	174 hp (PS)	
Bore	105 mm	4.1 in
Stroke	135 mm	5.3 in
Displacement	4.4 L	268.5 in <sup>3</sup>
Biodiesel Capability	Up to B20 <sup>(1)</sup>	
Number of Cylinders	4	

- Meets U.S. EPA Tier 4 Final, EU Stage V, and Korea Tier 4 Final emission standards.
- Net power advertised is the power available at the flywheel when engine is equipped with fan, air cleaner, CEM exhaust gas aftertreatment, alternator, and cooling fan running at intermediate speed.
- Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).
- Rated speed 2,200 rpm.

<sup>(1)</sup>Cat engines are compatible with the following renewable, alternative, and bio-fuels\* with lower greenhouse gas emission impact:  
 ✓ Up to B20 biodiesel (FAME)\*\*  
 ✓ Up to 100% HVO and GTL renewable fuels

\*Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.

\*\*For use of higher blends, consult your Cat dealer.

## Transmission

Forward/Reverse		
1st Gear	10 km/h	6.2 mph
2nd Gear	35 km/h	21.7 mph
Creeper Speed		
1st Gear	5.5 km/h	3.4 mph
2nd Gear	15 km/h	9.3 mph
Drawbar Pull	104 kN	23,380 lbf
Maximum Gradeability at (19 500 kg/42,990 lb)	61.0%	

## Service Refill Capacities

Fuel Tank (total capacity)	470 L	124.2 gal
Diesel Exhaust Fluid Tank	30 L	7.9 gal
Cooling System	31.7 L	8.4 gal
Engine Oil	13 L	3.4 gal
Hydraulic Tank	155 L	40.9 gal
Hydraulic System (including tank)	270 L	71.3 gal
Rear Axle Housing (differential)	14 L	3.7 gal
Front Steering Axle (differential)	10.5 L	2.8 gal
Final Drive (each)	2.5 L	0.7 gal
Powershift Transmission	2.5 L	0.7 gal

## Swing Mechanism

Maximum Swing Speed	9.2 rpm	
Maximum Swing Torque	52.5 kN·m	38,722 lbf·ft

## Undercarriage

Ground Clearance	360 mm	14.2 in
Maximum Steering Angle	35°	
Oscillation Axle Angle	± 8.5°	
Minimum Turning Radius		
Outside of Tire	6600 mm	21.6 ft
Outside of Tire (Plastic Fender)	7900 mm	25.9 ft
End of One-Piece Boom	9200 mm	30.2 ft
End of Variable Adjustable Boom	7500 mm	24.6 ft

## Operating Weights\*

Minimum	18 800 kg	41,450 lb
Maximum	21 200 kg	46,740 lb
Typical configurations:		
Variable Adjustable Boom**		
Rear Blade Only	19 500 kg	42,990 lb
Blade and Outriggers	20 500 kg	45,190 lb
Front and Rear Outriggers	20 600 kg	45,410 lb
One-Piece Boom **		
Rear Blade Only	19 050 kg	42,000 lb
Blade and Outriggers	20 050 kg	44,200 lb
Front and Rear Outriggers	20 150 kg	44,420 lb

\*Operating weight includes full fuel tank, operator, bucket 700 kg (1,543 lb) and dual pneumatic tires. Weight varies depending on configuration.

\*\*Typical configurations include 2500 mm (8'2") stick, 3600 kg (7,937 lb) counterweight, bucket and 220 kg (485 lb) quick coupler.

# M320 Wheeled Excavator Specifications

## Major Component Weights

Boom (including VA and stick cylinder, pins and standard hydraulic lines):		
One-Piece Boom 5650 mm (18'6")	2280 kg	5,030 lb
Variable Adjustable Boom 5260 mm (17'3")	2720 kg	6,000 lb
Sticks (including cylinder, bucket linkage, pins and standard hydraulic lines):		
Stick 2500 mm (8'2")	990 kg	2,180 lb
Stick 2900 mm (9'6")	1040 kg	2,290 lb
Counterweights:		
3600 kg (7,937 kg) Counterweight	3600 kg	7,940 lb
4200 kg (9,259 kg) Counterweight	4200 kg	9,260 lb
Undercarriage (including axles, standard tires and steps):		
Rear Blade	4960 kg	10,930 lb
Rear Blade/Front Outrigger	5970 kg	13,160 lb
Rear Outrigger/Front Blade	5970 kg	13,160 lb
Rear Outrigger/Front Outrigger	6150 kg	13,560 lb
Buckets:		
Pin-On Bucket GD 1.0 m <sup>3</sup> (1.31 yd <sup>3</sup> )	700 kg	1,540 lb
CW Bucket GD 1.0 m <sup>3</sup> (1.31 yd <sup>3</sup> )	700 kg	1,540 lb
Quick Couplers:		
CW30 Dedicated Quick Coupler	220 kg	490 lb
Pin Grabber Quick Coupler	380 kg	840 lb

## Hydraulic System

Maximum Pressure – Implement Circuit		
Normal	35 000 kPa	5,076 psi
Heavy Lift	37 000 kPa	5,366 psi
Travel Circuit	35 000 kPa	5,076 psi
Maximum Pressure – Auxiliary Circuit		
High Pressure	35 000 kPa	5,076 psi
Medium Pressure	17 000 kPa	2,466 psi
Swing Mechanism	39 500 kPa	5,729 psi
Maximum Flow		
Implement	306 L/min	81 gal/min
Travel Circuit	235 L/min	62 gal/min
Auxiliary Circuit		
High Pressure	250 L/min	66.0 gal/min
Medium Pressure	55 L/min	14.5 gal/min
Swing Mechanism	90 L/min	23.8 gal/min
Cylinders		
Boom Cylinder (VA) – Bore	130 mm	0'5"
Boom Cylinder (VA) – Stroke	906 mm	2'12"
VAB cylinder – Bore	160 mm	0'6"
VAB cylinder – Stroke	731 mm	2'5"
Boom Cylinder (1 PC) – Bore	130 mm	0'5"
Boom Cylinder (1 PC) – Stroke	906 mm	2'12"
Stick Cylinder (VA) – Bore	130 mm	0'5"
Stick Cylinder (VA) – Stroke	1205 mm	3'11"
Stick Cylinder (1 PC) – Bore	140 mm	0'6"
Stick Cylinder (1 PC) – Stroke	1205 mm	3'11"
Bucket Cylinder – Bore	110 mm	0'4"
Bucket Cylinder – Stroke	1077 mm	3'6"

## Tires

Standard	10.00 – 20 (dual pneumatic)
Optional	11.00 – 20 (dual pneumatic) 315/70R22.5 (dual pneumatic without spacer) 445/70/R19.5 TL XF (single pneumatic)

# M320 Wheeled Excavator Specifications

## Dozer Blade

Blade Type	Parallel	
Width	2540 mm	8'4"
Blade Roll-Over Height	570 mm	1'10"
Blade Total Height	610 mm	2'0"
Maximum Lowering Depth From Ground	130 mm	0'5"
Maximum Raising Height Above Ground	495 mm	1'7"

## Emissions and Safety

Engine Emissions	Tier 4 Final and Stage V	
Vibration Levels		
Maximum Hand/Arm (ISO 5349-2001)	<2.5 m/s <sup>2</sup>	<8.2
Maximum Whole Body (ISO/TR 25398:2006)	<0.5 m/s <sup>2</sup>	<1.6
Seat Transmissibility Factor (ISO 7096:2000-spectral class EM5)	<0.7	

## Standards

Brakes	ISO 3450:2011
Cab (ROPS)	ISO 12117-2:2008
FOPS (Falling Object Protective Structure)	ISO 10262:1998
Cab/Sound Levels	Meets appropriate standards as listed below

## Sound Performance

Operator Sound	
2000/14/EC	70 dB(A)
Spectator Sound	
2000/14/EC	99 dB(A)

- Operator Sound – The operator sound level is measured according to the procedures specified in 2000/14/EC, for a cab offered by Caterpillar, when properly installed and maintained and tested with the door and windows closed.
- Exterior Sound – The labeled spectator sound power level is measured according to the test procedures and conditions specified in 2000/14/EC.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained for doors/windows open) for extended periods or in noisy environment(s).


## Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 0.85 kg of refrigerant which has a CO<sub>2</sub> equivalent of 1.216 metric tonnes.


# M320 Wheeled Excavator Specifications

## Dimensions

All Dimensions are approximate. Values are with 10.00-20 Dual Pneumatic Tires.

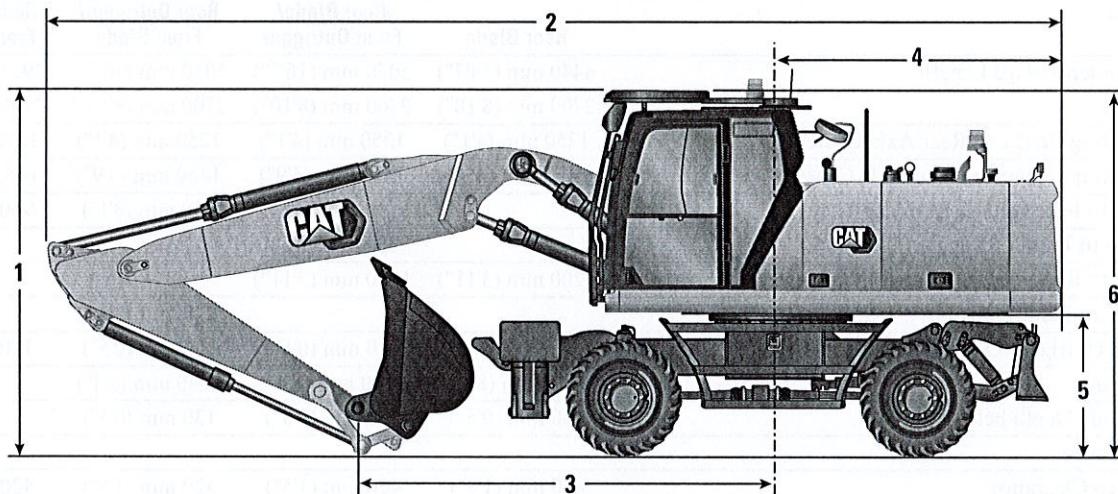

Boom Options	Variable Adjustable Boom 5260 mm (17'3")		One-Piece Boom 5650 mm (18'6")	
Stick Options	Bucket Linkage 2500 mm (8'2")	Bucket Linkage 2900 mm (9'6")	Bucket Linkage 2500 mm (8'2")	Bucket Linkage 2900 mm (9'6")
1 Shipping Height with Falling Object Guard (highest point between boom and cab)	3370 mm (11'1")	3370 mm (11'1")	3370 mm (11'1")	3370 mm (11'1")
Shipping Height without FOGS	3360 mm (11'0")	3490 mm (11'5")	3230 mm (10'7")	3340 mm (10'11")
2 Shipping Length	8925 mm (29'3")	8875 mm (29'1")	9325 mm (30'7")	9300 mm (30'6")
3 Support Point	3580 mm (11'9")	3420 mm (11'3")	3820 mm (12'6")	3610 mm (11'10")
4 Tail Swing Radius	2600 mm (8'6")	2600 mm (8'6")	2600 mm (8'6")	2600 mm (8'6")
5 Counterweight Clearance	1306 mm (4'3")	1306 mm (4'3")	1306 mm (4'3")	1306 mm (4'3")
6 Cab Height				
No Falling Object Guard	3199 mm (10'6")	3199 mm (10'6")	3199 mm (10'6")	3199 mm (10'6")
With Falling Object Guard	3361 mm (11'0")	3361 mm (11'0")	3361 mm (11'0")	3361 mm (11'0")
Overall Machine Width				
7 Width with outriggers on ground	3820 mm (12'6")	3820 mm (12'6")	3820 mm (12'6")	3820 mm (12'6")
8 Width with outriggers up	2540 mm (8'4")	2540 mm (8'4")	2540 mm (8'4")	2540 mm (8'4")
9 Width with blade	2540 mm (8'4")	2540 mm (8'4")	2540 mm (8'4")	2540 mm (8'4")
10 Width with Outriggers Fully Down	3650 mm (12'0")	3650 mm (12'0")	3650 mm (12'0")	3650 mm (12'0")
Enclosure Height (Doors)	2506 mm (8'3")	2506 mm (8'3")	2506 mm (8'3")	2506 mm (8'3")
11 Upperframe Width	2540 mm (8'4")	2540 mm (8'4")	2540 mm (8'4")	2540 mm (8'4")
Roading Position				
12 Steering Wheel to Linkage in Roading Position	3040 mm (10'0")	3040 mm (10'0")	—	—
13 Height in Roading Position	3970 mm (13'0")	3970 mm (13'0")	—	—

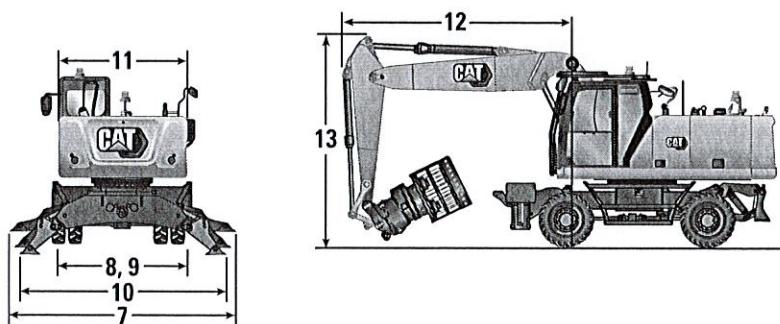

# M320 Wheeled Excavator Specifications

## Undercarriage Dimensions

All Dimensions are approximate. Values are with 10.00-20 Dual Pneumatic Tires.

Undercarriage	Rear Blade	Rear Blade/ Front Outrigger	Rear Outrigger/ Front Blade	Rear Outrigger/ Front Outrigger
14 Overall Undercarriage Length	4440 mm (14'7")	5050 mm (16'7")	5050 mm (16'7")	4955 mm (16'3")
15 Wheel Base	2700 mm (8'10")	2700 mm (8'10")	2700 mm (8'10")	2700 mm (8'10")
16 Swing Bearing Center to Rear Axle Center	1250 mm (4'1")	1250 mm (4'1")	1250 mm (4'1")	1250 mm (4'1")
17 Swing Bearing Center to Front Axle Center	1450 mm (4'9")	1450 mm (4'9")	1450 mm (4'9")	1450 mm (4'9")
18 Rear Axle to Rear Outrigger (mid)	—	—	950 mm (3'1")	950 mm (3'1")
19 Front Axle to Front Outrigger (mid)	—	750 mm (2'6")	—	—
20 Rear Axle to Blade (end)	1200 mm (3'11")	1200 mm (3'11")	—	—
Front Axle to Blade (end)	—	—	1245 mm (4'1")	—
21 Maximum Outrigger Depth below Ground	—	120 mm (0'5")	120 mm (0'5")	120 mm (0'5")
22 Blade Width	2540 mm (8'4")	2540 mm (8'4")	2540 mm (8'4")	—
Maximum Blade Depth below Ground	130 mm (0'5")	130 mm (0'5")	130 mm (0'5")	—
Ground Clearance				
Lowest Step Clearance	420 mm (1'5")	420 mm (1'5")	420 mm (1'5")	420 mm (1'5")
23 Outrigger Clearance	325 mm (1'1")	325 mm (1'1")	325 mm (1'1")	325 mm (1'1")
24 Blade Clearance (parallel)	495 mm (1'7")	495 mm (1'7")	495 mm (1'7")	495 mm (1'7")
25 Axle Clearance	360 mm (1'2")	360 mm (1'2")	360 mm (1'2")	360 mm (1'2")

\*Maximum tire clearance  
with outrigger fully down






Undercarriage with dozer only



Undercarriage with 2 sets of outriggers



Undercarriage with 1 set of outriggers and dozer

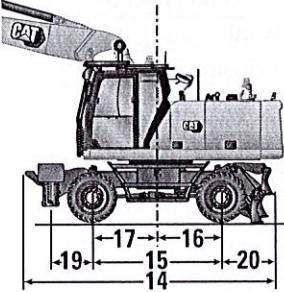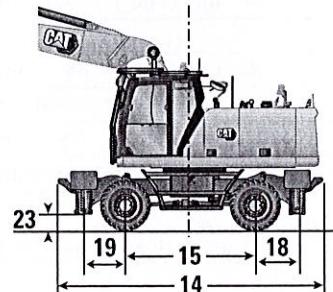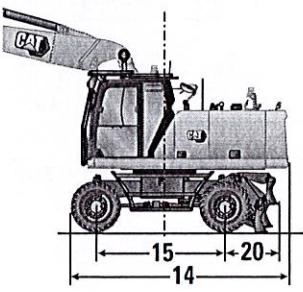


# M320 Wheeled Excavator Specifications


## Working Ranges

All Dimensions are approximate. Values are with 10.00-20 Dual Pneumatic Tires.

Feet Meters

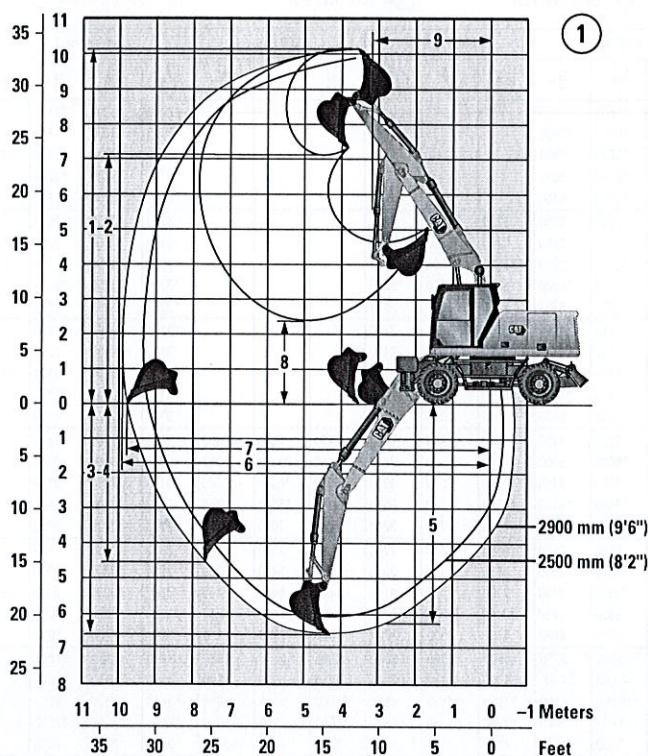

Feet Meters

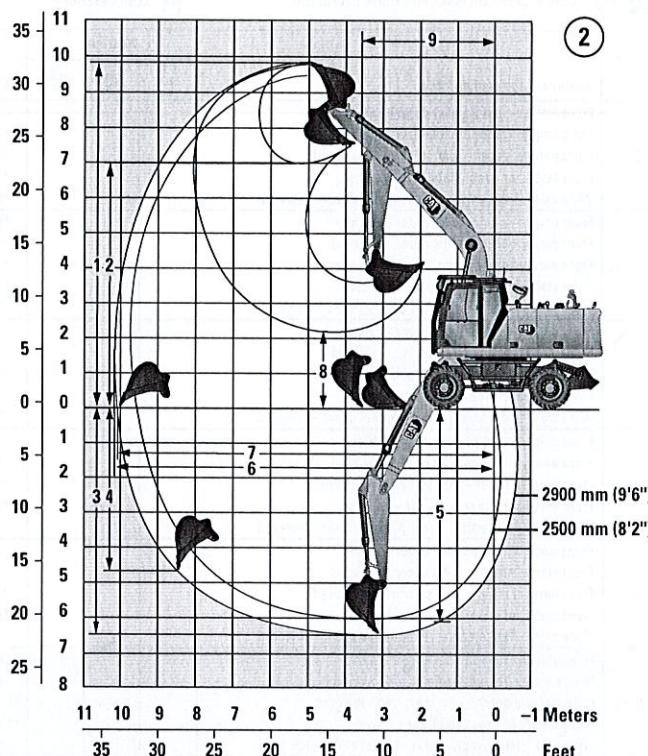

### Boom Options

### Variable Adjustable Boom 5260 mm (17'3")

### One-Piece Boom 5650 mm (18'6")

1

2

### Stick Options

### Bucket Linkage 2500 mm (8'2")

### Bucket Linkage 2900 mm (9'6")

### Bucket Linkage 2500 mm (8'2")

### Bucket Linkage 2900 mm (9'6")

1 Maximum Cutting Height	9950 mm (32'8")	10 240 mm (33'7")	9550 mm (31'4")	9790 mm (32'1")
2 Maximum Loading Height	6960 mm (22'10")	7250 mm (23'9")	6680 mm (21'11")	6910 mm (22'8")
3 Maximum Digging Depth	6030 mm (19'9")	6430 mm (21'1")	6000 mm (19'8")	6400 mm (21'0")
4 Maximum Vertical Wall Digging Depth	4230 mm (13'11")	4670 mm (15'4")	4250 mm (13'11")	4740 mm (15'7")
5 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	5930 mm (19'5")	6330 mm (20'9")	5800 mm (19'0")	6220 mm (20'5")
6 Maximum Reach	9470 mm (31'1")	9850 mm (32'4")	9820 mm (32'3")	10 190 mm (33'5")
7 Maximum Reach at Ground Line	9290 mm (30'6")	9680 mm (31'9")	9640 mm (31'8")	10 030 mm (32'11")
8 Minimum Loading Height	2810 mm (9'3")	2420 mm (7'11")	2790 mm (9'2")	2390 mm (7'10")
9 Minimum Front Swing Radius	3180 mm (10'5")	3300 mm (10'10")	3620 mm (11'11")	3610 mm (11'10")
Bucket Forces (ISO)	137 kN 30,799 (lbf)	137 kN 30,799 (lbf)	137 kN 30,799 (lbf)	137 kN 30,799 (lbf)
Stick Forces (ISO)	92 kN 20,682 (lbf)	83 kN 18,659 (lbf)	106 kN 23,830 (lbf)	96 kN 21,582 (lbf)
Bucket Type	GD	GD	GD	GD
Bucket Capacity	0.98 m <sup>3</sup> (1.28 yd <sup>3</sup> )			
Bucket Tip Radius (Pin-On)	1462 mm (4'10")	1462 mm (4'10")	1462 mm (4'10")	1462 mm (4'10")
Bucket Tip Radius (QC)	1535 mm (5'0")	1535 mm (5'0")	1535 mm (5'0")	1535 mm (5'0")

Range values are with dual pneumatic tires (10.00-20).

Range values are calculated with a GD bucket (CW) and CW-30 quick coupler with a tip radius of 1535 mm (5'0").

Force values are calculated with heavy lift on, a GD bucket (pin-on) and a tip radius of 1462 mm (4'10").

# M320 Wheeled Excavator Specifications

## Lift Capacities – Variable Adjustable Boom 2500 mm Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 3600 kg, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height			
Undercarriage configuration	mm	3000 mm			4500 mm			6000 mm			7500 mm			mm			
7500 mm	Front empty – rear parallel dozer – raised				*5800	*5800	5250							*3700	*3700	*3700	
	Front empty – rear parallel dozer – lowered				*5800	*5800	5800							*3700	*3700	*3700	
	Front parallel dozer – rear stabilizer – lowered				*5800	*5800	5800							*3700	*3700	*3700	
	Front stabilizer – rear stabilizer – lowered				*5800	*5800	5800							*3700	*3700	*3700	
	Wide axle – front empty – rear parallel dozer – lowered				*5800	*5800	5750							*3700	*3700	*3700	
6000 mm	Front empty – rear parallel dozer – raised				*6200	*6200	5250	5250	4000	3200				*3250	*3250	2650	
	Front empty – rear parallel dozer – lowered				*6200	*6200	5800	5200	*5500	3550				*3250	*3250	2900	
	Front parallel dozer – rear stabilizer – lowered				*6200	*6200	*6200	*5500	*5500	5300			*3250	*3250	*3250	6660	
	Front stabilizer – rear stabilizer – lowered				*6200	*6200	*6200	*5500	*5500	*5500			*3250	*3250	*3250		
	Wide axle – front empty – rear parallel dozer – lowered				*6200	*6200	5750	5250	4050	3550				*3250	*3250	2900	
4500 mm	Front empty – rear parallel dozer – raised				*7150	6250	4950	5150	3900	3100				*3100	2650	2100	
	Front empty – rear parallel dozer – lowered				*7150	*7150	5500	5100	*6000	3450				*3100	*3100	2350	
	Front parallel dozer – rear stabilizer – lowered				*7150	*7150	*7150	*6000	*6000	5200			*3100	*3100	*3100	7440	
	Front stabilizer – rear stabilizer – lowered				*7150	*7150	*7150	*6000	*6000	*6000			*3100	*3100	*3100		
	Wide axle – front empty – rear parallel dozer – lowered				*7150	6250	5450	5150	3900	3400				*3100	2700	2350	
3000 mm	Front empty – rear parallel dozer – raised				7650	5750	4450	4900	3700	2900	3450	2550	2000	*3100	2350	1850	
	Front empty – rear parallel dozer – lowered				7650	*8600	5000	4900	*6550	3250	3450	*5350	2250	*3100	*3100	2100	
	Front parallel dozer – rear stabilizer – lowered				*8600	*8600	7750	*6550	*6550	4950	*5350	*5350	3500	*3100	*3100	7840	
	Front stabilizer – rear stabilizer – lowered				*8600	*8600	*8600	*6550	*6550	5950	*5350	*5350	4150	*3100	*3100		
	Wide axle – front empty – rear parallel dozer – lowered				7700	5750	4950	4950	3700	3200	3450	2600	2250	*3100	2400	2050	
1500 mm	Front empty – rear parallel dozer – raised				7150	5250	4000	4650	3450	2700	3350	2500	1950	3050	2250	1750	
	Front empty – rear parallel dozer – lowered				7100	*9800	4550	4650	*7100	3050	3350	5400	2200	3050	*3300	2000	
	Front parallel dozer – rear stabilizer – lowered				*9800	*9800	7250	*7100	*7100	4700	*5650	5450	3400	*3300	*3300	3100	7930
	Front stabilizer – rear stabilizer – lowered				*9800	*9800	8850	*7100	*7100	5700	*5650	5600	4050	*3300	*3300	*3300	
	Wide axle – front empty – rear parallel dozer – lowered				7200	5250	4450	4700	3500	3000	3350	2500	2150	3100	2250	1950	
0 mm	Front empty – rear parallel dozer – raised				6850	5000	3750	4500	3300	2550	3300	2400	1850	3150	2300	1800	
	Front empty – rear parallel dozer – lowered				6850	*10000	4300	4500	*7250	2900	3250	5350	2100	3150	*3650	2000	
	Front parallel dozer – rear stabilizer – lowered				*10000	*10000	6950	*7250	*7250	4550	*5500	5400	3300	*3650	*3650	3200	7720
	Front stabilizer – rear stabilizer – lowered				*10000	*10000	8600	*7250	*7250	5500	*5500	5500	4000	*3650	*3650	*3650	
	Wide axle – front empty – rear parallel dozer – lowered				6900	5000	4200	4550	3300	2850	3300	2400	2100	3150	2300	2000	
-1500 mm	Front empty – rear parallel dozer – raised	*9300	*9300	6850	6800	4900	3700	4450	3250	2500				3500	2550	2000	
	Front empty – rear parallel dozer – lowered	*9300	*9300	7950	6800	*9250	4250	4450	*6800	2850				3450	*4350	2250	
	Front parallel dozer – rear stabilizer – lowered	*9300	*9300	*9300	*9250	*9250	6900	*6800	*6800	4500				*4350	*4350	3500	7190
	Front stabilizer – rear stabilizer – lowered	*9300	*9300	*9300	*9250	*9250	8500	*6800	*6800	5450				*4350	*4350	4250	
	Wide axle – front empty – rear parallel dozer – lowered	*9300	*9300	7800	6850	4950	4150	4500	3250	2800				3500	2550	2200	
-3000 mm	Front empty – rear parallel dozer – raised				6900	5000	3800	4550	3350	2600				4300	3200	2450	
	Front empty – rear parallel dozer – lowered				6900	*7450	4300	4500	*5150	2900				4300	*4650	2800	
	Front parallel dozer – rear stabilizer – lowered				*7450	*7450	7000	*5150	*5150	4600				*4650	*4650	4350	6240
	Front stabilizer – rear stabilizer – lowered				*7450	*7450	*7450	*5150	*5150	*5150				*4650	*4650	*4650	
	Wide axle – front empty – rear parallel dozer – lowered				6950	5050	4250	4550	3350	2900				4350	3200	2750	

\*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Lift Capacities – Variable Adjustable Boom 8'2" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 7,940 lb, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height				
Undercarriage configuration	25 ft	10 ft			15 ft			20 ft			25 ft			ft				
		Front	Side	Rear	Front	Side	Rear	Front	Side	Rear	Front	Side	Rear	Front	Side	Rear		
Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered	25 ft				*12,300	*12,300	11,300							*8,300	*8,300	*8,300		
					*12,300	*12,300	*12,300							*8,300	*8,300	*8,300		
					*12,300	*12,300	*12,300							*8,300	*8,300	*8,300		
					*12,300	*12,300	*12,300							*8,300	*8,300	*8,300		
					*12,300	*12,300	*12,300							*8,300	*8,300	*8,300		
Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered	20 ft				*13,500	*13,500	11,300	11,200	8,600	6,900				*7,200	*7,200	5,900		
					*13,500	*13,500	12,500	11,200	*11,500	7,600				*7,200	*7,200	6,600		
					*13,500	*13,500	*13,500	*11,500	*11,500	11,400				*7,200	*7,200	*7,200		
					*13,500	*13,500	*13,500	*11,500	*11,500	*11,500				*7,200	*7,200	*7,200		
					*13,500	*13,500	12,300	11,300	8,600	7,600				*7,200	*7,200	6,500		
Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered	15 ft				*15,400	*15,400	10,700	11,000	8,400	6,700				*6,800	*6,800	4,700		
					*15,400	*15,400	11,900	11,000	*13,000	7,500				*6,800	*6,800	5,200		
					*15,400	*15,400	*15,400	*13,000	*13,000	11,100				*6,800	*6,800	*6,800		
					*15,400	*15,400	*15,400	*13,000	*13,000	*13,000				*6,800	*6,800	*6,800		
					*15,400	*15,400	13,500	11,700	11,100	8,400	7,400			*6,800	*6,800	5,200		
Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered	10 ft				16,500	12,400	9,600	10,600	8,000	6,300	7,400	5,500	4,300	*6,900	5,200	4,100		
					16,500	*18,600	10,800	10,500	*14,300	7,000	7,400	*10,300	4,900	*6,900	*6,900	4,600		
					*18,600	*18,600	16,700	*14,300	*14,300	10,700	*10,300	*10,300	7,500	*6,900	*6,900	*6,900		
					*18,600	*18,600	*18,600	*14,300	*14,300	12,800	*10,300	*10,300	8,900	*6,900	*6,900	*6,900		
					16,600	12,400	10,700	10,600	8,000	6,900	7,500	5,500	4,800	*6,900	5,300	4,600		
Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered	5 ft				15,400	11,300	8,700	10,100	7,500	5,800	7,200	5,300	4,100	6,800	5,000	3,900		
					15,300	*21,200	9,800	10,000	*15,400	6,600	7,200	11,600	4,700	6,700	*7,200	4,400		
					*21,200	*21,200	15,600	*15,400	*15,400	10,200	*12,300	11,800	7,300	*7,200	*7,200	6,800		
					*21,200	*21,200	19,100	*15,400	*15,400	12,200	*12,300	12,000	8,700	*7,200	*7,200	*7,200		
					15,500	11,300	9,600	10,100	7,500	6,500	7,300	5,300	4,600	6,800	5,000	4,300		
Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered	0 ft				14,800	10,700	8,100	9,700	7,100	5,500	7,100	5,200	4,000	6,900	5,100	3,900		
					14,700	*21,700	9,200	9,700	*15,700	6,200	7,000	*10,700	4,500	6,900	*8,000	4,500		
					*21,700	*21,700	15,000	*15,700	*15,700	9,800	*10,700	*10,700	7,100	*8,000	*8,000	7,000		
					*21,700	*21,700	18,400	*15,700	*15,700	11,900	*10,700	*10,700	8,600	*8,000	*8,000	*8,000		
					14,900	10,800	9,100	9,800	7,200	6,100	7,100	5,200	4,500	7,000	5,100	4,400		
Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered	-5 ft				*21,200	20,500	14,700	14,700	10,600	8,000	9,600	7,000	5,400		7,700	5,700	4,400	
					*21,200	*21,200	17,000	14,600	*20,000	9,100	9,500	*14,600	6,100			7,600	*9,600	4,900
					*21,200	*21,200	*21,200	*20,000	*20,000	14,800	*14,600	*14,600	9,700			*9,600	*9,600	7,800
					*21,200	*21,200	*21,200	*20,000	*20,000	18,300	*14,600	*14,600	11,700			*9,600	*9,600	9,300
					*21,200	20,600	16,700	14,700	10,600	9,000	9,700	7,000	6,000			7,700	5,700	4,900
Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered	-10 ft														9,600	7,100	5,500	
															9,600	*10,200	6,200	
															*10,200	*10,200	9,700	
															*10,200	*10,200	*10,200	
															9,700	7,100	6,100	

\* Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Lift Capacities – Variable Adjustable Boom 2900 mm Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 3600 kg, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height		
Undercarriage configuration	mm	3000 mm			4500 mm			6000 mm			7500 mm			mm		
		Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear
7500 mm	Front empty – rear parallel dozer – raised													*3050	*3050	*3050
	Front empty – rear parallel dozer – lowered													*3050	*3050	*3050
	Front parallel dozer – rear stabilizer – lowered													*3050	*3050	*3050
	Front stabilizer – rear stabilizer – lowered													*3050	*3050	*3050
	Wide axle – front empty – rear parallel dozer – lowered													*3050	*3050	*3050
6000 mm	Front empty – rear parallel dozer – raised							*5000	4100	3300				*2700	*2700	2350
	Front empty – rear parallel dozer – lowered							*5000	*5000	3650				*2700	*2700	2650
	Front parallel dozer – rear stabilizer – lowered							*5000	*5000	*5000				*2700	*2700	*2700
	Front stabilizer – rear stabilizer – lowered							*5000	*5000	5000*				*2700	*2700	*2700
	Wide axle – front empty – rear parallel dozer – lowered							*5000	4100	3600				*2700	*2700	2600
4500 mm	Front empty – rear parallel dozer – raised				*6150	*6150	5050	5200	3950	3150	3550	2700	2100	*2600	2450	1950
	Front empty – rear parallel dozer – lowered				*6150	*6150	5600	5150	*6550	3500	3550	*4100	2350	*2600	*2600	2150
	Front parallel dozer – rear stabilizer – lowered				*6150	*6150	*6150	*5650	*5650	5250	*4100	*4100	3600	*2600	*2600	*2600
	Front stabilizer – rear stabilizer – lowered				*6150	*6150	*6150	*5650	*5650	*5650	*4100	*4100	*4100	*2600	*2600	*2600
	Wide axle – front empty – rear parallel dozer – lowered				*6150	*6150	5550	5200	3950	3500	3600	2700	2350	*2600	2450	2150
3000 mm	Front empty – rear parallel dozer – raised				7800	5850	4550	4950	3750	2950	3450	2600	2050	*2600	2200	1700
	Front empty – rear parallel dozer – lowered				7750	*8150	5100	4950	*6300	3300	3450	*5350	2300	*2600	*2600	1950
	Front parallel dozer – rear stabilizer – lowered				*8150	*8150	7900	*6300	*6300	5000	*5350	*5350	3500	*2600	*2600	*2600
	Front stabilizer – rear stabilizer – lowered				*8150	*8150	*8150	*6300	*6300	6000	*5350	*5350	4200	*2600	*2600	*2600
	Wide axle – front empty – rear parallel dozer – lowered				7850	5850	5050	5000	3750	3250	3500	2600	2250	*2600	2200	1900
1500 mm	Front empty – rear parallel dozer – raised				7200	5300	4050	4700	3500	2700	3350	2500	1950	*2750	2100	1600
	Front empty – rear parallel dozer – lowered				7200	*9500	4600	4650	*6950	3050	3350	5400	2200	*2750	*2750	1850
	Front parallel dozer – rear stabilizer – lowered				*9500	*9500	7300	*6950	*6950	4750	*5550	5500	3400	*2750	*2750	*2750
	Front stabilizer – rear stabilizer – lowered				*9500	*9500	8950	*6950	*6950	5700	*5550	*5550	4050	*2750	*2750	*2750
	Wide axle – front empty – rear parallel dozer – lowered				7250	5300	4550	4700	3500	3000	3350	2500	2150	*2750	2100	1800
0 mm	Front empty – rear parallel dozer – raised				6900	5000	3750	4500	3300	2550	3250	2400	1850	2900	2150	1650
	Front empty – rear parallel dozer – lowered				6850	*10000	4300	4500	*7200	2900	3250	5300	2100	2900	*3000	1850
	Front parallel dozer – rear stabilizer – lowered				*10000	*10000	6950	*7200	*7200	4550	*5600	5400	3300	*3000	2950	8120
	Front stabilizer – rear stabilizer – lowered				*10000	*10000	8600	*7200	*7200	5500	*5600	5500	3950	*3000	*3000	*3000
	Wide axle – front empty – rear parallel dozer – lowered				6900	5000	4250	4550	3300	2850	3300	2400	2050	2950	2150	1850
-1500 mm	Front empty – rear parallel dozer – raised	*8700	*8700	6700	6750	4900	3650	4400	3200	2450	3250	2350	1800	3200	2300	1800
	Front empty – rear parallel dozer – lowered	*8700	*8700	7800	6750	*9500	4200	4400	*6950	2800	3200	*4700	2050	3150	*3500	2050
	Front parallel dozer – rear stabilizer – lowered	*8700	*8700	*8700	*9500	*9500	6850	*6950	*6950	4450	*4700	*4700	3250	*3500	*3500	3200
	Front stabilizer – rear stabilizer – lowered	*8700	*8700	*8700	*9500	*9500	8450	*6950	*6950	5400	*4700	*4700	3950	*3500	*3500	*3500
	Wide axle – front empty – rear parallel dozer – lowered	*8700	*8700	7650	6800	4900	4100	4450	3250	2750	3250	2350	2050	3200	2350	2000
-3000 mm	Front empty – rear parallel dozer – raised	*11050	9650	6900	6800	4950	3700	4450	3250	2500				3850	2800	2150
	Front empty – rear parallel dozer – lowered	*11050	*11050	7950	6800	*8050	4250	4450	*5750	2850				3800	*4550	2450
	Front parallel dozer – rear stabilizer – lowered	*11050	*11050	*11050	*8050	*8050	6900	*5750	*5750	4500				*4550	*4550	3850
	Front stabilizer – rear stabilizer – lowered	*11050	*11050	*11050	*8050	*8050	8050	*5750	*5750	5450				*4550	*4550	*4550
	Wide axle – front empty – rear parallel dozer – lowered	*11050	9650	7850	6850	4950	4150	4500	3250	2800				3850	2800	2450

\*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Lift Capacities – Variable Adjustable Boom 9'6" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 7,940 lb, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height				
		Undercarriage configuration			10 ft			15 ft			20 ft			25 ft			ft	
		Front empty	Front parallel dozer	Front stabilizer	Front empty	Front parallel dozer	Front stabilizer	Front empty	Front parallel dozer	Front stabilizer	Front empty	Front parallel dozer	Front stabilizer	Front empty	Front parallel dozer	Front stabilizer	ft	
25 ft	Front empty – rear parallel dozer – raised															*6,800	*6,800	*6,800
	Front empty – rear parallel dozer – lowered															*6,800	*6,800	*6,800
	Front parallel dozer – rear stabilizer – lowered															*6,800	*6,800	*6,800
	Front stabilizer – rear stabilizer – lowered															*6,800	*6,800	*6,800
	Wide axle – front empty – rear parallel dozer – lowered															*6,800	*6,800	*6,800
20 ft	Front empty – rear parallel dozer – raised								*10,800	8,800	7,100					*6,000	*6,000	5,300
	Front empty – rear parallel dozer – lowered								*10,800	*10,800	7,800					*6,000	*6,000	5,900
	Front parallel dozer – rear stabilizer – lowered								*10,800	*10,800	*10,800					*6,000	*6,000	23.13
	Front stabilizer – rear stabilizer – lowered								*10,800	*10,800	7,700					*6,000	*6,000	5,800
	Wide axle – front empty – rear parallel dozer – lowered								*10,800	8,800	7,700					*6,000	*6,000	5,800
15 ft	Front empty – rear parallel dozer – raised				*13,400	*13,400	10,900	11,200	8,500	6,800	7,600	5,700	4,500	*5,700	5,400	4,300		
	Front empty – rear parallel dozer – lowered				*13,400	*13,400	12,100	11,100	*12,400	7,600	7,600	*7,900	5,100	*5,700	*5,700	4,800		
	Front parallel dozer – rear stabilizer – lowered				*13,400	*13,400	*13,400	*12,400	*12,400	11,300	*7,900	*7,900	7,700	*5,700	*5,700	*5,700	25.66	
	Front stabilizer – rear stabilizer – lowered				*13,400	*13,400	*13,400	*12,400	*12,400	*12,400	*7,900	*7,900	*7,900	*5,700	*5,700	*5,700		
	Wide axle – front empty – rear parallel dozer – lowered				*13,400	*13,400	12,000	11,200	8,500	7,500	7,700	5,700	5,000	*5,700	5,500	4,700		
10 ft	Front empty – rear parallel dozer – raised				16,800	12,600	9,900	10,700	8,000	6,400	7,500	5,600	4,400	*5,700	4,800	3,800		
	Front empty – rear parallel dozer – lowered				16,700	*17,600	11,000	10,600	*13,700	7,100	7,400	*11,300	4,900	*5,700	*5,700	4,300		
	Front parallel dozer – rear stabilizer – lowered				*17,600	*17,600	17,000	*13,700	*13,700	10,800	*11,300	*11,300	7,500	*5,700	*5,700	*5,700	26.97	
	Front stabilizer – rear stabilizer – lowered				*17,600	*17,600	*17,600	*13,700	*13,700	12,900	*11,300	*11,300	9,000	*5,700	*5,700	*5,700		
	Wide axle – front empty – rear parallel dozer – lowered				16,900	12,600	10,900	10,700	8,100	7,000	7,500	5,600	4,800	*5,700	4,900	4,200		
5 ft	Front empty – rear parallel dozer – raised				15,600	11,400	8,800	10,100	7,500	5,900	7,200	5,300	4,100	*6,000	4,600	3,600		
	Front empty – rear parallel dozer – lowered				15,500	*20,500	9,900	10,100	*15,000	6,600	7,200	11,600	4,700	*6,000	*6,000	4,000		
	Front parallel dozer – rear stabilizer – lowered				*20,500	*20,500	15,700	*15,000	*15,000	10,200	*12,100	11,800	7,300	*6,000	*6,000	*6,000	27.30	
	Front stabilizer – rear stabilizer – lowered				*20,500	*20,500	19,300	*15,000	*15,000	12,300	*12,100	12,100	8,700	*6,000	*6,000	*6,000		
	Wide axle – front empty – rear parallel dozer – lowered				15,600	11,500	9,800	10,200	7,500	6,500	7,300	5,300	4,600	*6,000	4,600	4,000		
0 ft	Front empty – rear parallel dozer – raised				14,800	10,700	8,100	9,700	7,100	5,500	7,000	5,100	4,000	6,400	4,700	3,600		
	Front empty – rear parallel dozer – lowered				14,700	*21,600	9,200	9,700	*15,600	6,200	7,000	11,400	4,500	6,400	*6,600	4,100		
	Front parallel dozer – rear stabilizer – lowered				*21,600	*21,600	15,000	*15,600	*15,600	9,800	*12,100	11,600	7,100	*6,600	*6,600	6,500	26.64	
	Front stabilizer – rear stabilizer – lowered				*21,600	*21,600	18,500	*15,600	*15,600	11,900	*12,100	11,800	8,500	*6,600	*6,600	*6,600		
	Wide axle – front empty – rear parallel dozer – lowered				14,900	10,800	9,100	9,800	7,100	6,100	7,100	5,200	4,400	6,500	4,700	4,000		
-5 ft	Front empty – rear parallel dozer – raised	*19,800	*19,800	14,400	14,600	10,500	7,900	9,500	6,900	5,300				7,000	5,100	4,000		
	Front empty – rear parallel dozer – lowered	*19,800	*19,800	16,700	14,500	*20,600	9,000	9,500	*15,000	6,000				7,000	*7,800	4,500		
	Front parallel dozer – rear stabilizer – lowered	*19,800	*19,800	*19,800	*20,600	*20,600	14,700	*15,000	*15,000	9,600				*7,800	*7,800	7,100	24.93	
	Front stabilizer – rear stabilizer – lowered	*19,800	*19,800	*19,800	*20,600	*20,600	18,200	*15,000	*15,000	11,700				*7,800	*7,800	*7,800		
	Wide axle – front empty – rear parallel dozer – lowered	*19,800	*19,800	16,400	14,600	10,500	8,900	9,600	7,000	6,000				7,100	5,100	4,400		
-10 ft	Front empty – rear parallel dozer – raised	*23,900	20,700	14,800	14,700	10,600	8,000	9,600	7,000	5,400				8,500	6,300	4,800		
	Front empty – rear parallel dozer – lowered	*23,900	*23,900	17,100	14,600	*17,300	9,100	9,600	*12,300	6,100				8,500	*10,000	5,500		
	Front parallel dozer – rear stabilizer – lowered	*23,900	*23,900	*23,900	*17,300	*17,300	14,900	*12,300	*12,300	9,700				*10,000	*10,000	8,600	21.92	
	Front stabilizer – rear stabilizer – lowered	*23,900	*23,900	*23,900	*17,300	*17,300	*17,300	*12,300	*12,300	11,800				*10,000	*10,000	*10,000		
	Wide axle – front empty – rear parallel dozer – lowered	*23,900	20,700	16,800	14,800	10,600	9,000	9,700	7,100	6,000				8,600	6,300	5,400		

\*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Lift Capacities – Variable Adjustable Boom 2500 mm Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 4200 kg, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height		
		3000 mm			4500 mm			6000 mm			7500 mm			mm		
		Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear
7500 mm	Undercarriage configuration															
	Front empty – rear parallel dozer – raised				*5800	*5800	5700							*3700	*3700	*3700
	Front empty – rear parallel dozer – lowered				*5800	*5800	*5800							*3700	*3700	*3700
	Front parallel dozer – rear stabilizer – lowered				*5800	*5800	*5800							*3700	*3700	*3700
	Front stabilizer – rear stabilizer – lowered				*5800	*5800	*5800							*3700	*3700	*3700
6000 mm	Wide axle – front empty – rear parallel dozer – lowered				*5800	*5800	*5800							*3700	*3700	*3700
	Front empty – rear parallel dozer – raised				*6200	*6200	5650	*5500	4350	3500				*3250	*3250	2900
	Front empty – rear parallel dozer – lowered				*6200	*6200	*6200	*5500	*5500	3900				*3250	*3250	3200
	Front parallel dozer – rear stabilizer – lowered				*6200	*6200	*6200	*5500	*5500	*5500				*3250	*3250	*3250
	Front stabilizer – rear stabilizer – lowered				*6200	*6200	*6200	*5500	*5500	*5500				*3250	*3250	*3250
4500 mm	Wide axle – front empty – rear parallel dozer – lowered				*6200	*6200	6200	*5500	4350	3850				*3250	*3250	3150
	Front empty – rear parallel dozer – raised				*7150	6750	5350	5500	4250	3400				*3100	2950	2350
	Front empty – rear parallel dozer – lowered				*7150	*7150	5950	5500	*6000	3750				*3100	*3100	2600
	Front parallel dozer – rear stabilizer – lowered				*7150	*7150	*7150	*6000	*6000	5550				*3100	*3100	*3100
	Front stabilizer – rear stabilizer – lowered				*7150	*7150	*7150	*6000	*6000	*6000				*3100	*3100	*3100
3000 mm	Wide axle – front empty – rear parallel dozer – lowered				8200	6200	4850	5300	4050	3200	3750	2850	2250	*3100	2600	2050
	Front empty – rear parallel dozer – raised				8200	*8600	5450	5250	*6550	3550	3700	*5350	2500	*3100	*3100	2300
	Front empty – rear parallel dozer – lowered				*8600	*8600	8300	*6550	*6550	5350	*5350	*5350	3750	*3100	*3100	*3100
	Front parallel dozer – rear stabilizer – lowered				*8600	*8600	*8600	*6550	*6550	6350	*5350	*5350	4450	*3100	*3100	*3100
	Front stabilizer – rear stabilizer – lowered				8250	6250	5350	5300	4050	3500	3750	2850	2500	*3100	2600	2300
1500 mm	Wide axle – front empty – rear parallel dozer – lowered				7700	5750	4400	5050	3800	3000	3650	2750	2150	*3300	2500	1950
	Front empty – rear parallel dozer – raised				7650	*9800	4950	5000	*7100	3350	3600	*5650	2400	*3300	*3300	2200
	Front empty – rear parallel dozer – lowered				*9800	*9800	7800	*7100	*7100	5100	*5650	*5650	3650	*3300	*3300	*3300
	Front parallel dozer – rear stabilizer – lowered				*9800	*9800	9500	*7100	*7100	6100	*5650	*5650	4350	*3300	*3300	*3300
	Front stabilizer – rear stabilizer – lowered				7750	5750	4900	5050	3800	3300	3650	2750	2400	*3300	2500	2200
0 mm	Wide axle – front empty – rear parallel dozer – lowered				7450	5450	4200	4900	3650	2850	3550	2650	2100	3400	2550	2000
	Front empty – rear parallel dozer – raised				7400	*10000	4750	4850	*7250	3200	3550	*5500	2350	3400	*3650	2250
	Front empty – rear parallel dozer – lowered				*10000	*10000	7500	*7250	*7250	4950	*5500	*5500	3600	*3650	*3650	3450
	Front parallel dozer – rear stabilizer – lowered				*10000	*10000	9200	*7250	*7250	5900	*5500	*5500	4300	*3650	*3650	*3650
	Front stabilizer – rear stabilizer – lowered				7450	5500	4650	4900	3650	3150	3600	2650	2300	3450	2550	2250
-1500 mm	Wide axle – front empty – rear parallel dozer – lowered				*9300	*9300	7550	7350	5400	4150	4800	3600	2800			
	Front empty – rear parallel dozer – raised				*9300	*9300	8700	7350	*9250	4650	4800	*6800	3150			
	Front empty – rear parallel dozer – lowered				*9300	*9300	*9300	*9250	*9250	7450	*6800	*6800	4850			
	Front parallel dozer – rear stabilizer – lowered				*9300	*9300	*9300	*9250	*9250	9150	*6800	*6800	5850			
	Front stabilizer – rear stabilizer – lowered				*9300	*9300	8550	7400	5450	4600	4850	3600	3100			
-3000 mm	Wide axle – front empty – rear parallel dozer – lowered				*7450	5500	4200	4900	3700	2850				*4650	3500	2750
	Front empty – rear parallel dozer – raised				7450	*7450	4750	4900	*5150	3200				*4650	*4650	2500
	Front empty – rear parallel dozer – lowered				*7450	*7450	*7450	*5150	*5150	4950				*4650	*4650	3100
	Front parallel dozer – rear stabilizer – lowered				*7450	*7450	*7450	*5150	*5150	*5150				*4650	*4650	*4650
	Front stabilizer – rear stabilizer – lowered				*7450	5500	4700	4950	3700	3200				*4650	3500	3050

\*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Lift Capacities – Variable Adjustable Boom 8'2" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 9,260 lb, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height			
Undercarriage configuration	25 ft	10 ft			15 ft			20 ft			25 ft			ft			
		Front	Side	Rear	Front	Side	Rear	Front	Side	Rear	Front	Side	Rear	Front	Side	Rear	
Front empty – rear parallel dozer – raised	25 ft				*12,300	*12,300	12,200							*8,300	*8,300	*8,300	
					*12,300	*12,300	*12,300							*8,300	*8,300	*8,300	
					*12,300	*12,300	*12,300							*8,300	*8,300	*8,300	
					*12,300	*12,300	*12,300							*8,300	*8,300	*8,300	
					*12,300	*12,300	*12,300							*8,300	*8,300	*8,300	
Front empty – rear parallel dozer – lowered	20 ft				*13,500	*13,500	12,200	*11,500	9,300	7,500				*7,200	*7,200	6,500	
					*13,500	*13,500	13,500	*11,500	8,300					*7,200	*7,200	7,200	
					*13,500	*13,500	*13,500	*11,500	11,500	*11,500				*7,200	*7,200	*7,200	
					*13,500	*13,500	13,500	*11,500	9,400	8,200				*7,200	*7,200	7,100	
					*13,500	*13,500	13,300	*11,500	9,400	8,200							
Front parallel dozer – rear stabilizer – lowered	15 ft				*15,400	14,500	11,600	11,800	9,100	7,300				*6,800	6,500	5,200	
					*15,400	*15,400	12,800	11,800	*13,000	8,100				*6,800	*6,800	5,800	
					*15,400	*15,400	*15,400	*13,000	*13,000	12,000				*6,800	*6,800	*6,800	
					*15,400	*15,400	*15,400	*13,000	*13,000	*13,000				*6,800	*6,800	*6,800	
					*15,400	14,600	12,700	11,900	9,200	8,000				*6,800	6,500	5,700	
Front stabilizer – rear stabilizer – lowered	10 ft				17,700	13,400	10,500	11,400	8,700	6,900	8,000	6,100	4,800	*6,900	5,800	4,600	
					17,700	*18,600	11,700	11,300	*14,300	7,700	8,000	*10,300	5,400	*6,900	*6,900	5,100	
					*18,600	*18,600	17,900	*14,300	*14,300	11,500	*10,300	*10,300	8,100	*6,900	*6,900	*6,900	
					*18,600	*18,600	*18,600	*14,300	*14,300	13,700	*10,300	*10,300	9,600	*6,900	*6,900	*6,900	
					17,800	13,500	11,600	11,400	8,700	7,600	8,100	6,100	5,300	*6,900	5,800	5,100	
Front parallel dozer – rear parallel dozer – lowered	5 ft				16,600	12,400	9,600	10,900	8,200	6,500	7,800	5,900	4,600	*7,200	5,500	4,300	
					16,500	*21,200	10,700	10,800	*15,400	7,200	7,800	*12,300	5,200	*7,200	*7,200	*7,200	
					*21,200	*21,200	16,800	*15,400	*15,400	11,000	*12,300	7,900	*7,200	*7,200	*7,200	*7,200	
					*21,200	*21,200	20,400	*15,400	*15,400	13,100	*12,300	9,400	*7,200	*7,200	*7,200	*7,200	
					16,700	12,400	10,600	10,900	8,200	7,100	7,900	5,900	5,100	*7,200	5,500	4,800	
Front empty – rear parallel dozer – lowered	0 ft				16,000	11,800	9,000	10,500	7,900	6,100	7,700	5,700	4,500	7,500	5,600	4,400	
					15,900	*21,700	10,200	10,500	*15,700	6,900	7,600	*10,700	5,100	7,500	*8,000	5,000	
					*21,700	*21,700	16,200	*15,700	*15,700	10,600	*10,700	*10,700	7,700	*8,000	*8,000	7,600	
					*21,700	*21,700	19,800	*15,700	*15,700	12,800	*10,700	*10,700	9,200	*8,000	*8,000	*8,000	
					16,100	11,800	10,100	10,600	7,900	6,800	7,700	5,800	5,000	7,600	5,700	4,900	
Front parallel dozer – rear parallel dozer – lowered	-5 ft				*21,200	*21,200	16,300	15,800	11,700	8,900	10,400	7,800	6,000		8,300	6,200	4,900
					*21,200	*21,200	18,700	15,800	*20,000	10,100	10,300	*14,600	6,800		8,300	*9,600	5,500
					*21,200	*21,200	*21,200	*20,000	*20,000	16,000	*14,600	*14,600	10,500		*9,600	*9,600	8,400
					*21,200	*21,200	*21,200	*20,000	*20,000	19,600	*14,600	*14,600	12,600		*9,600	*9,600	6,400
					*21,200	*21,200	18,400	15,900	11,700	9,900	10,500	7,800	6,700		8,400	6,300	5,400
Front empty – rear parallel dozer – lowered	-10 ft				*16,000	11,900	9,100	10,600	8,000	6,200				*10,200	7,800	6,100	
					16,000	*16,000	10,300	10,600	*10,700	7,000				*10,200	*10,200	6,900	
					*16,000	*16,000	*16,000	*10,700	*10,700	10,700				*10,200	*10,200	*10,200	
					*16,000	*16,000	*16,000	*10,700	*10,700	*10,700				*10,200	*10,200	*10,200	
					*16,000	11,900	10,100	10,700	8,000	6,900				*10,200	7,800	6,800	

\*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567-2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Lift Capacities – Variable Adjustable Boom 2900 mm Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 4200 kg, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height		
Undercarriage configuration	mm	3000 mm			4500 mm			6000 mm			7500 mm			mm		
		3000 mm	4500 mm	6000 mm	3000 mm	4500 mm	6000 mm	3000 mm	4500 mm	6000 mm	3000 mm	4500 mm	6000 mm	3000 mm	4500 mm	6000 mm
7500 mm	Front empty – rear parallel dozer – raised													*3050	*3050	*3050
	Front empty – rear parallel dozer – lowered													*3050	*3050	*3050
	Front parallel dozer – rear stabilizer – lowered													*3050	*3050	*3050
	Front stabilizer – rear stabilizer – lowered													*3050	*3050	*3050
	Wide axle – front empty – rear parallel dozer – lowered													*3050	*3050	*3050
6000 mm	Front empty – rear parallel dozer – raised							*5000	4450	3600				*2700	*2700	*2600
	Front empty – rear parallel dozer – lowered							*5000	*5000	3950				*2700	*2700	*2700
	Front parallel dozer – rear stabilizer – lowered							*5000	*5000	*5000				*2700	*2700	*2700
	Front stabilizer – rear stabilizer – lowered							*5000	*5000	*5000				*2700	*2700	*2700
	Wide axle – front empty – rear parallel dozer – lowered							*5000	4450	3900				*2700	*2700	*2700
4500 mm	Front empty – rear parallel dozer – raised				*6150	*6150	5450	5550	4300	3450	3850	2950	2350	*2600	*2600	2150
	Front empty – rear parallel dozer – lowered				*6150	*6150	6050	5550	*5650	3800	3800	*4100	2600	*2600	*2600	2400
	Front parallel dozer – rear stabilizer – lowered				*6150	*6150	*6150	*5650	*5650	5600	*4100	*4100	3850	*2600	*2600	*2600
	Front stabilizer – rear stabilizer – lowered				*6150	*6150	*6150	*5650	*5650	*5650	*4100	*4100	*4100	*2600	*2600	*2600
	Wide axle – front empty – rear parallel dozer – lowered				*6150	*6150	6000	5600	4300	3800	3850	2950	2600	*2600	*2600	2350
3000 mm	Front empty – rear parallel dozer – raised				*8150	6350	5000	5300	4050	3250	3750	2850	2250	*2600	*2600	2400
	Front empty – rear parallel dozer – lowered				*8150	*8150	5550	5300	*6300	3600	3750	*5350	2500	*2600	*2600	2150
	Front parallel dozer – rear stabilizer – lowered				*8150	*8150	*8150	*6300	*6300	5350	*5350	*5350	3800	*2600	*2600	*2600
	Front stabilizer – rear stabilizer – lowered				*8150	*8150	*8150	*6300	*6300	*6300	*5350	*5350	4500	*2600	*2600	*2600
	Wide axle – front empty – rear parallel dozer – lowered				*8150	6350	5450	5350	4100	3550	3750	2850	2500	*2600	*2600	2100
1500 mm	Front empty – rear parallel dozer – raised				7800	5800	4500	5050	3850	3000	3650	2750	2150	*2750	2300	1800
	Front empty – rear parallel dozer – lowered				7750	*9500	5050	5050	*6950	3350	3600	*5550	2400	*2750	*2750	2050
	Front parallel dozer – rear stabilizer – lowered				*9500	*9500	7850	*6950	*6950	5100	*5550	*5550	3650	*2750	*2750	*2750
	Front stabilizer – rear stabilizer – lowered				*9500	*9500	*9500	*6950	*6950	6100	*5550	*5550	4350	*2750	*2750	*2750
	Wide axle – front empty – rear parallel dozer – lowered				7800	5800	4950	5100	3850	3350	3650	2750	2400	*2750	2300	2000
0 mm	Front empty – rear parallel dozer – raised				7450	5500	4200	4850	3650	2850	3550	2650	2050	*3000	2350	1850
	Front empty – rear parallel dozer – lowered				7400	*10000	4750	4850	*7200	3200	3500	*5600	2300	*3000	*3000	2050
	Front parallel dozer – rear stabilizer – lowered				*10000	*10000	7500	*7200	*7200	4900	*5600	*5600	3550	*3000	*3000	*3000
	Front stabilizer – rear stabilizer – lowered				*10000	*10000	9200	*7200	*7200	5900	*5600	*5600	4250	*3000	*3000	*3000
	Wide axle – front empty – rear parallel dozer – lowered				7500	5500	4650	4900	3650	3150	3550	2650	2300	*3000	2350	2050
-1500 mm	Front empty – rear parallel dozer – raised	*8700	*8700	7450	7300	5350	4100	4800	3550	2750	3500	2600	2050	3450	2600	2000
	Front empty – rear parallel dozer – lowered	*8700	*8700	8600	7300	*9500	4650	4750	*6950	3100	3500	*4700	2300	3450	*3500	2250
	Front parallel dozer – rear stabilizer – lowered	*8700	*8700	*8700	*9500	*9500	7400	*6950	*6950	4850	*4700	*4700	3550	*3500	*3500	3500
	Front stabilizer – rear stabilizer – lowered	*8700	*8700	*8700	*9500	*9500	9100	*6950	*6950	5850	*4700	*4700	4250	*3500	*3500	*3500
	Wide axle – front empty – rear parallel dozer – lowered	*8700	*8700	8450	7350	5400	4550	4800	3550	3050	3550	2650	2250	3450	2600	2250
-3000 mm	Front empty – rear parallel dozer – raised	*11050	10550	7600	7350	5400	4150	4800	3600	2800				4150	3100	2450
	Front empty – rear parallel dozer – lowered	*11050	*11050	8750	7350	*8050	4700	4800	*5750	3150				4150	*4550	2750
	Front parallel dozer – rear stabilizer – lowered	*11050	*11050	*11050	*8050	*8050	7450	*5750	*5750	4850				*4550	*4550	4200
	Front stabilizer – rear stabilizer – lowered	*11050	*11050	*11050	*8050	*8050	*8050	*5750	*5750	*5750				*4550	*4550	*4550
	Wide axle – front empty – rear parallel dozer – lowered	*11050	10600	8600	7400	5450	4600	4850	3600	3100				4200	3100	2700

\*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Lift Capacities – Variable Adjustable Boom 9'6" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 9,260 lb, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height			
Undercarriage configuration	25 ft	10 ft			15 ft			20 ft			25 ft			30 ft			
		10 ft	15 ft	20 ft	10 ft	15 ft	20 ft	10 ft	15 ft	20 ft	10 ft	15 ft	20 ft	10 ft	15 ft	20 ft	
Front empty – rear parallel dozer – raised														*6,800	*6,800	*6,800	
Front empty – rear parallel dozer – lowered														*6,800	*6,800	*6,800	
Front parallel dozer – rear stabilizer – lowered														*6,800	*6,800	*6,800	
Front stabilizer – rear stabilizer – lowered														*6,800	*6,800	*6,800	
Wide axle – front empty – rear parallel dozer – lowered														*6,800	*6,800	*6,800	
Front empty – rear parallel dozer – raised	20 ft							*10,800	9,500	7,700				*6,000	*6,000	5,800	
Front empty – rear parallel dozer – lowered								*10,800	8,200	8,500				*6,000	*6,000	*6,000	
Front parallel dozer – rear stabilizer – lowered								*10,800	*10,800	*10,800				*6,000	*6,000	*6,000	
Front stabilizer – rear stabilizer – lowered								*10,800	*10,800	*10,800				*6,000	*6,000	*6,000	
Wide axle – front empty – rear parallel dozer – lowered								*10,800	9,500	8,400				*6,000	*6,000	*6,000	
Front empty – rear parallel dozer – raised	15 ft				*13,400	*13,400	11,800	12,000	9,300	7,500	*7,900	6,300	5,000	*5,700	*5,700	4,800	
Front empty – rear parallel dozer – lowered					*13,400	*13,400	13,100	11,900	*12,400	8,200	*7,900	*7,900	5,600	*5,700	*5,700	5,300	
Front parallel dozer – rear stabilizer – lowered					*13,400	*13,400	*13,400	*12,400	*12,400	12,100	*7,900	*7,900	*5,700	*5,700	*5,700	25.66	
Front stabilizer – rear stabilizer – lowered					*13,400	*13,400	*13,400	*12,400	*12,400	*12,400	*7,900	*7,900	*5,700	*5,700	*5,700		
Wide axle – front empty – rear parallel dozer – lowered					*13,400	*13,400	12,900	12,000	9,300	8,100	*7,900	6,300	5,500	*5,700	*5,700	5,200	
Front empty – rear parallel dozer – raised	10 ft				*17,600	13,700	10,800	11,500	8,800	7,000	8,100	6,100	4,900	*5,700	5,300	4,200	
Front empty – rear parallel dozer – lowered					*17,600	*17,600	12,000	11,400	*13,700	7,800	8,000	*11,300	5,400	*5,700	*5,700	4,700	
Front parallel dozer – rear stabilizer – lowered					*17,600	*17,600	*17,600	*13,700	*13,700	11,600	*11,300	*11,300	8,100	*5,700	*5,700	26.97	
Front stabilizer – rear stabilizer – lowered					*17,600	*17,600	*17,600	*13,700	*13,700	*13,700	*11,300	*11,300	9,600	*5,700	*5,700		
Wide axle – front empty – rear parallel dozer – lowered					*17,600	13,700	11,800	11,500	8,800	7,700	8,100	6,100	5,400	*5,700	5,400	4,700	
Front empty – rear parallel dozer – raised	5 ft				16,700	12,500	9,700	10,900	8,200	6,500	7,800	5,900	4,600	*6,000	5,100	4,000	
Front empty – rear parallel dozer – lowered					16,700	*20,500	10,900	10,900	*15,000	7,300	7,800	*12,100	5,200	*6,000	*6,000	4,500	
Front parallel dozer – rear stabilizer – lowered					*20,500	*20,500	16,900	*15,000	*15,000	11,000	*12,100	*12,100	7,900	*6,000	*6,000	27.30	
Front stabilizer – rear stabilizer – lowered					*20,500	*20,500	*20,500	*15,000	*15,000	13,200	*12,100	*12,100	9,400	*6,000	*6,000		
Wide axle – front empty – rear parallel dozer – lowered					16,800	12,500	10,700	11,000	8,300	7,200	7,900	5,900	5,100	*6,000	5,100	4,400	
Front empty – rear parallel dozer – raised	0 ft				16,000	11,800	9,000	10,500	7,900	6,100	7,600	5,700	4,500	*6,000	5,200	4,100	
Front empty – rear parallel dozer – lowered					15,900	*21,600	10,200	10,500	*15,600	*15,600	7,600	*12,100	5,000	*6,000	*6,000	4,600	
Front parallel dozer – rear stabilizer – lowered					*21,600	*21,600	16,200	*15,600	*15,600	10,600	*12,100	*12,100	7,700	*6,000	*6,000	26.64	
Front stabilizer – rear stabilizer – lowered					*21,600	*21,600	19,800	*15,600	*15,600	12,700	*12,100	*12,100	9,200	*6,000	*6,000		
Wide axle – front empty – rear parallel dozer – lowered					16,100	11,800	10,100	10,600	7,900	6,800	7,700	4,900	5,200	5,200	4,500		
Front empty – rear parallel dozer – raised	-5 ft				*19,800	*19,800	16,000	15,700	11,600	8,800	10,300	7,700	6,000		7,600	5,700	4,400
Front empty – rear parallel dozer – lowered					*19,800	*19,800	18,400	15,700	*20,600	10,000	10,300	*15,000	6,700		7,600	*7,800	5,000
Front parallel dozer – rear stabilizer – lowered					*19,800	*19,800	*19,800	*20,600	*20,600	15,900	*15,000	*15,000	10,400		*7,800	*7,800	7,700
Front stabilizer – rear stabilizer – lowered					*19,800	*19,800	*19,800	*20,600	*20,600	19,500	*15,000	*15,000	12,500		*7,800	*7,800	
Wide axle – front empty – rear parallel dozer – lowered					*19,800	*19,800	18,100	15,800	11,600	9,800	10,400	7,700	6,600		7,700	5,700	4,900
Front empty – rear parallel dozer – raised	-10 ft				*23,900	22,600	16,400	15,900	11,700	8,900	10,400	7,800	6,000		9,200	6,900	5,400
Front empty – rear parallel dozer – lowered					*23,900	*23,900	18,800	15,800	*17,300	10,100	10,400	*12,300	6,800		9,200	*10,000	6,100
Front parallel dozer – rear stabilizer – lowered					*23,900	*23,900	*23,900	*17,300	*17,300	16,100	*12,300	*12,300	10,500		*10,000	*10,000	9,300
Front stabilizer – rear stabilizer – lowered					*23,900	*23,900	*23,900	*17,300	*17,300	*12,300	*12,300	*12,300	9,700		*10,000	*10,000	*10,000
Wide axle – front empty – rear parallel dozer – lowered					*23,900	22,700	18,500	16,000	11,700	9,900	10,500	7,800	6,700		9,300	6,900	6,000

\*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Lift Capacities – One-Piece Boom 2500 mm Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 3600 kg, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height		
Undercarriage configuration	7500 mm	3000 mm			4500 mm			6000 mm			7500 mm			mm		
7500 mm	Front empty – rear parallel dozer – raised													*4150	4100	3300
	Front empty – rear parallel dozer – lowered													*4150	*4150	3650
	Front parallel dozer – rear stabilizer – lowered													*4150	*4150	*4150
	Front stabilizer – rear stabilizer – lowered													*4150	*4150	*4150
	Wide axle – front empty – rear parallel dozer – lowered													*4150	*4150	3650
6000 mm	Front empty – rear parallel dozer – raised							5200	4000	3200				*3750	2950	2350
	Front empty – rear parallel dozer – lowered							5200	*5600	3550				*3750	*3750	2600
	Front parallel dozer – rear stabilizer – lowered							*5600	*5600	5250				*3750	*3750	*3750
	Front stabilizer – rear stabilizer – lowered							*5600	*5600	*5600				*3750	*3750	*3750
	Wide axle – front empty – rear parallel dozer – lowered							5250	4000	3500				*3750	2950	2600
4500 mm	Front empty – rear parallel dozer – raised				*7350	6100	4800	5050	3850	3050	3500	2650	2100	3250	2450	1900
	Front empty – rear parallel dozer – lowered				*7350	*7350	5350	5000	*6000	3400	3500	*5250	2350	3250	*3650	2150
	Front parallel dozer – rear stabilizer – lowered				*7350	*7350	*7350	*6000	*6000	5100	*5250	*5250	3550	*3650	*3650	3300
	Front stabilizer – rear stabilizer – lowered				*7350	*7350	*7350	*6000	*6000	*5250	*5250	4200	*3650	*3650	*3650	7810
	Wide axle – front empty – rear parallel dozer – lowered				*7350	6100	5300	5050	3850	3350	3500	2650	2300	3250	2450	2150
3000 mm	Front empty – rear parallel dozer – raised				7400	5500	4300	4800	3600	2850	3400	2550	2000	2950	2200	1700
	Front empty – rear parallel dozer – lowered				7400	*8900	4800	4750	*6600	3200	3400	5400	2250	2900	*3700	1900
	Front parallel dozer – rear stabilizer – lowered				*8900	*8900	7500	*6600	*6600	4850	*5450	*5450	3450	*3700	*3700	2950
	Front stabilizer – rear stabilizer – lowered				*8900	*8900	*8900	*6600	*6600	5800	*5450	*5450	4100	*3700	*3700	3550
	Wide axle – front empty – rear parallel dozer – lowered				7450	5500	4750	4800	3600	3150	3400	2550	2200	2950	2200	1900
1500 mm	Front empty – rear parallel dozer – raised				6900	5050	3850	4550	3350	2650	3300	2450	1900	2850	2100	1600
	Front empty – rear parallel dozer – lowered				6900	*9900	4350	4550	*7100	2950	3250	5300	2150	2800	*3950	1850
	Front parallel dozer – rear stabilizer – lowered				*9900	*9900	7000	*7100	*7100	4600	*5650	*5650	3300	*3950	*3950	2850
	Front stabilizer – rear stabilizer – lowered				*9900	*9900	8600	*7100	*7100	5550	*5650	5500	4000	*3950	*3950	3400
	Wide axle – front empty – rear parallel dozer – lowered				6950	5050	4300	4600	3400	2900	3300	2450	2100	2850	2100	1800
0 mm	Front empty – rear parallel dozer – raised				6700	4850	3650	4400	3200	2500	3200	2350	1800	2900	2100	1650
	Front empty – rear parallel dozer – lowered				6650	*9900	4150	4400	*7200	2800	3200	5200	2050	2850	*4400	*4400
	Front parallel dozer – rear stabilizer – lowered				*9900	*9900	6750	*7200	*7200	4450	*5550	5250	3250	*4400	*4400	2900
	Front stabilizer – rear stabilizer – lowered				*9900	*9900	8350	*7200	*7200	5400	*5550	5400	3900	*4400	*4400	3500
	Wide axle – front empty – rear parallel dozer – lowered				6750	4850	4100	4450	3250	2800	3200	2350	2050	2900	2100	1850
-1500 mm	Front empty – rear parallel dozer – raised	*8700	*8700	6750	6650	4800	3650	4350	3150	2450	3200	2350	1800	3150	2300	1800
	Front empty – rear parallel dozer – lowered	*8700	*8700	7800	6600	*9050	4150	4300	*6800	2750	3200	*4950	2050	3150	*4850	2050
	Front parallel dozer – rear stabilizer – lowered	*8700	*8700	*8700	*9050	*9050	6750	*6800	*6800	4400	*4950	*4950	3250	*4850	*4850	3200
	Front stabilizer – rear stabilizer – lowered	*8700	*8700	*8700	*9050	*9050	8300	*6800	*6800	5300	*4950	*4950	3900	*4850	*4850	3850
	Wide axle – front empty – rear parallel dozer – lowered	*8700	*8700	7700	6700	4800	4050	4350	3200	2750	3200	2350	2000	3200	2300	2000
-3000 mm	Front empty – rear parallel dozer – raised	*9400	*9400	6900	6750	4900	3700	4400	3200	2500				3800	2800	2200
	Front empty – rear parallel dozer – lowered	*9400	*9400	8000	6700	*7450	4200	4400	*5500	2800				3800	*4500	2450
	Front parallel dozer – rear stabilizer – lowered	*9400	*9400	*9400	*7450	*7450	6850	*5500	*5500	4450				*4500	*4500	3850
	Front stabilizer – rear stabilizer – lowered	*9400	*9400	*9400	*7450	*7450	*7450	*5500	*5500	5400				*4500	*4500	*4500
	Wide axle – front empty – rear parallel dozer – lowered	*9400	*9400	7850	6800	4900	4150	4450	3250	2800				3850	2800	2450

\*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Lift Capacities – One-Piece Boom 8'2" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 7,940 lb, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height					
Undercarriage configuration	25 ft	10 ft			15 ft			20 ft			25 ft			ft					
Front empty – rear parallel dozer – raised															*9,200	*9,200	7,600		
Front empty – rear parallel dozer – lowered															*9,200	*9,200	8,400		
Front parallel dozer – rear stabilizer – lowered															*9,200	*9,200	18.80		
Front stabilizer – rear stabilizer – lowered															*9,200	*9,200	*9,200		
Wide axle – front empty – rear parallel dozer – lowered															*9,200	*9,200	8,300		
Front empty – rear parallel dozer – raised	20 ft								11,200	8,600	6,900				*8,300	6,600	5,300		
Front empty – rear parallel dozer – lowered									11,100	*12,200	7,600				*8,300	*8,300	5,900		
Front parallel dozer – rear stabilizer – lowered									*12,200	*12,200	11,300				*8,300	*8,300	*8,300		
Front stabilizer – rear stabilizer – lowered									*12,200	*12,200	8,600				*8,300	*8,300	*8,300		
Wide axle – front empty – rear parallel dozer – lowered									11,200	8,600	7,500				*8,300	6,600	5,800		
Front empty – rear parallel dozer – raised	15 ft								*15,900	13,100	10,400	10,800	8,300	6,600	7,500	5,600	4,500	7,200	
Front empty – rear parallel dozer – lowered									*15,900	*15,900	11,500	10,800	*13,000	7,300	7,500	*10,400	5,000	7,200	
Front parallel dozer – rear stabilizer – lowered									*15,900	*15,900	*13,000	*13,000	11,000	*10,400	*10,400	7,600	*8,000	*8,000	
Front stabilizer – rear stabilizer – lowered									*15,900	*15,900	*13,000	*13,000	*13,000	*10,400	*10,400	9,000	*8,000	*8,000	
Wide axle – front empty – rear parallel dozer – lowered									*15,900	13,100	11,400	10,900	8,300	7,300	7,500	5,600	4,900	7,300	
Front empty – rear parallel dozer – raised	10 ft								16,000	11,900	9,300	10,300	7,800	6,100	7,300	5,500	4,300	6,500	
Front empty – rear parallel dozer – lowered									*15,900	*19,100	10,400	10,300	*14,300	*14,300	10,400	*11,900	11,800	7,400	
Front parallel dozer – rear stabilizer – lowered									*19,100	*19,100	16,200	*14,300	*14,300	12,500	*11,900	*11,900	8,800	*8,200	*8,200
Front stabilizer – rear stabilizer – lowered									*19,100	*19,100	*19,100	*14,300	*14,300	7,800	6,800	7,400	5,500	4,800	6,500
Wide axle – front empty – rear parallel dozer – lowered									16,100	11,900	10,300	10,400	7,800	6,800	7,400	5,500	4,800	6,400	
Front empty – rear parallel dozer – raised	5 ft								14,900	10,900	8,300	9,800	7,300	5,700	7,100	5,200	4,100	6,200	4,600
Front empty – rear parallel dozer – lowered									14,800	*21,400	9,400	9,800	*15,400	6,400	7,000	11,400	4,600	6,200	*8,700
Front parallel dozer – rear stabilizer – lowered									*21,400	*21,400	15,100	*15,400	*15,400	9,900	*12,200	11,500	7,100	*8,700	6,300
Front stabilizer – rear stabilizer – lowered									*21,400	*21,400	18,500	*15,400	*15,400	11,900	*12,200	11,800	8,600	*8,700	7,500
Wide axle – front empty – rear parallel dozer – lowered									15,000	10,900	9,300	9,900	7,300	6,300	7,100	5,200	4,500	6,300	
Front empty – rear parallel dozer – raised	0 ft								14,400	10,400	7,900	9,500	6,900	5,400	6,900	5,100	3,900	6,400	4,700
Front empty – rear parallel dozer – lowered									14,300	*21,400	9,000	9,400	*15,600	6,100	6,900	11,200	4,400	6,300	*9,700
Front parallel dozer – rear stabilizer – lowered									*21,400	*21,400	14,600	*15,600	*15,600	9,600	*12,000	11,400	7,000	*9,700	6,400
Front stabilizer – rear stabilizer – lowered									*21,400	*21,400	18,000	*15,600	*15,600	11,600	*12,000	11,600	8,400	*9,700	7,700
Wide axle – front empty – rear parallel dozer – lowered									14,500	10,400	8,800	9,500	7,000	6,000	7,000	5,100	4,400	6,400	
Front empty – rear parallel dozer – raised	-5 ft								*19,800	*19,800	14,500	14,300	10,300	7,800	9,400	6,800	5,300		7,000
Front empty – rear parallel dozer – lowered									*19,800	*19,800	16,800	14,200	*19,700	8,900	9,300	*14,700	6,000		6,900
Front parallel dozer – rear stabilizer – lowered									*19,800	*19,800	*19,800	*19,700	14,500	*14,700	*14,700	9,500		*10,700	
Front stabilizer – rear stabilizer – lowered									*19,800	*19,800	*19,800	*19,700	17,900	*14,700	*14,700	11,500		*10,700	
Wide axle – front empty – rear parallel dozer – lowered									*19,800	*19,800	16,500	14,400	10,400	8,800	9,400	6,900	5,900		7,000
Front empty – rear parallel dozer – raised	-10 ft								*20,400	*20,400	14,900	14,500	10,500	8,000	9,500	7,000	5,400		8,500
Front empty – rear parallel dozer – lowered									*20,400	*20,400	17,100	14,400	*16,100	9,100	9,400	*11,800	6,100		8,400
Front parallel dozer – rear stabilizer – lowered									*20,400	*20,400	*20,400	*16,100	*16,100	14,700	*11,800	9,600	7,000		*9,900
Front stabilizer – rear stabilizer – lowered									*20,400	*20,400	*20,400	*16,100	*16,100	*16,100	*11,800	*11,800	11,600		*9,900
Wide axle – front empty – rear parallel dozer – lowered									*20,400	*20,400	16,800	14,600	10,500	8,900	9,600	7,000	6,000		8,500

\*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Lift Capacities – One-Piece Boom 2900 mm Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 3600 kg, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height		
		3000 mm			4500 mm			6000 mm			7500 mm			mm		
		Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear
7500 mm	Undercarriage configuration															
	Front empty – rear parallel dozer – raised							*4600	4050	3250				*3400	*3400	2900
	Front empty – rear parallel dozer – lowered							*4600	*4600	3600				*3400	*3400	3200
	Front parallel dozer – rear stabilizer – lowered							*4600	*4600	*4600				*3400	*3400	*3400
	Front stabilizer – rear stabilizer – lowered							*4600	*4600	*4600				*3400	*3400	*3400
6000 mm	Wide axle – front empty – rear parallel dozer – lowered							*4600	4050	3550				*3400	*3400	3150
	Front empty – rear parallel dozer – raised							*5250	4050	3250	*3200	2700	2150	*3150	2700	2150
	Front empty – rear parallel dozer – lowered							*5250	*5250	3600	*3200	*3200	2400	*3150	*3150	2400
	Front parallel dozer – rear stabilizer – lowered							*5250	*5250	*5250	*3200	*3200	*3200	*3150	*3150	*3150
	Front stabilizer – rear stabilizer – lowered							*5250	*5250	*5250	*3200	*3200	*3200	*3150	*3150	*3150
4500 mm	Wide axle – front empty – rear parallel dozer – lowered							5100	3900	3100	3550	2850	2100	3000	2250	1750
	Front empty – rear parallel dozer – raised							5050	*5700	3450	3500	*5050	2350	3000	*3050	2000
	Front empty – rear parallel dozer – lowered							*5700	*5700	5150	*5050	*5050	3550	*3050	*3050	3050
	Front parallel dozer – rear stabilizer – lowered							*5700	*5700	*5700	*5050	*5050	4250	*3050	*3050	*3050
	Front stabilizer – rear stabilizer – lowered							5100	3900	3400	3550	2650	2350	3000	2250	1950
3000 mm	Front empty – rear parallel dozer – raised							7550	5600	4400	4850	3650	2900	3400	2550	2000
	Front empty – rear parallel dozer – lowered							7500	*8450	4900	4800	*6350	3200	3400	*5300	2250
	Front parallel dozer – rear stabilizer – lowered							*8450	*8450	7650	*6350	*6350	4900	*5300	3450	*3100
	Front stabilizer – rear stabilizer – lowered							*8450	*8450	*8450	*6350	*6350	5850	*5300	4100	*3100
	Wide axle – front empty – rear parallel dozer – lowered							7600	5650	4850	4850	3650	3150	3450	2550	2250
1500 mm	Front empty – rear parallel dozer – raised							7000	5100	3900	4550	3400	2650	3300	2450	1900
	Front empty – rear parallel dozer – lowered							6950	*9650	4400	4550	*6950	2950	3250	5300	2150
	Front parallel dozer – rear stabilizer – lowered							*9650	*9650	7050	*6950	*6950	4600	*5550	5350	3300
	Front stabilizer – rear stabilizer – lowered							*9650	*9650	8700	*6950	*6950	5550	*5550	5500	4000
	Wide axle – front empty – rear parallel dozer – lowered							7000	5100	4350	4600	3400	2950	3300	2450	2100
0 mm	Front empty – rear parallel dozer – raised							6700	4800	3650	4400	3200	2450	3200	2350	1800
	Front empty – rear parallel dozer – lowered							6650	*9950	4150	4350	*7200	2800	3150	5200	2050
	Front parallel dozer – rear stabilizer – lowered							*9950	*9950	6750	*7200	*7200	4450	*5600	5250	3200
	Front stabilizer – rear stabilizer – lowered							*9950	*9950	8350	*7200	*7200	5350	*5600	5400	3850
	Wide axle – front empty – rear parallel dozer – lowered							6750	4850	4100	4400	3200	2750	3200	2350	2000
-1500 mm	Front empty – rear parallel dozer – raised	*8300	*8300	6600	6600	4750	3550	4300	3150	2400	3150	2300	1750	2900	2100	1600
	Front empty – rear parallel dozer – lowered	*8300	*8300	7650	6550	*9350	4100	4300	*6900	2700	3150	5150	2000	2900	*4250	1850
	Front parallel dozer – rear stabilizer – lowered	*8300	*8300	*8300	*9350	*9350	6700	*6900	*6900	4350	*5200	5200	3200	*4250	*4250	2900
	Front stabilizer – rear stabilizer – lowered	*8300	*8300	*8300	*9350	*9350	8250	*6900	*6900	5300	*5200	*5200	3850	*4250	*4250	3500
	Wide axle – front empty – rear parallel dozer – lowered	*8300	*8300	7500	6650	4750	4000	4350	3150	2700	3150	2300	2000	2900	2100	1800
-3000 mm	Front empty – rear parallel dozer – raised	*10 600	9450	6750	6650	4800	3600	4350	3150	2400	3150	2300	1750	2900	2100	1600
	Front empty – rear parallel dozer – lowered	*10 600	*10 600	7800	6650	*7950	4150	4300	*5950	2750	3150	5150	2000	2900	*4400	2200
	Front parallel dozer – rear stabilizer – lowered	*10 600	*10 600	*10 600	*7950	*7950	6750	*5950	*5950	4400	*4200	*4200	3450	*4400	*4400	3450
	Front stabilizer – rear stabilizer – lowered	*10 600	*10 600	*10 600	*7950	*7950	*7950	*5950	*5950	5300	*4200	*4200	3450	*4400	*4400	4150
	Wide axle – front empty – rear parallel dozer – lowered	*10 600	9450	7700	6700	4800	4050	4350	3150	2700	3150	2300	2000	2900	2100	2150

\*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Lift Capacities – One-Piece Boom 9'6" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 7,940 lb, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height			
Undercarriage configuration	25 ft	10 ft			15 ft			20 ft			25 ft			ft			
		10 ft	15 ft	20 ft	10 ft	15 ft	20 ft	10 ft	15 ft	20 ft	10 ft	15 ft	20 ft	10 ft	15 ft	20 ft	
Front empty – rear parallel dozer – raised								*9,100	8,600	7,000				*7,600	*7,600	6,600	
Front empty – rear parallel dozer – lowered								*9,100	*9,100	7,700				*7,600	*7,600	7,300	
Front parallel dozer – rear stabilizer – lowered								*9,100	*9,100	*9,100				*7,600	*7,600	*7,600	
Front stabilizer – rear stabilizer – lowered								*9,100	*9,100	*9,100				*7,600	*7,600	*7,600	
Wide axle – front empty – rear parallel dozer – lowered								*9,100	8,700	7,600				*7,600	*7,600	7,200	
Front empty – rear parallel dozer – raised	20 ft							11,300	8,700	7,000				*6,900	6,000	4,800	
Front empty – rear parallel dozer – lowered								11,300	*11,500	7,800				*6,900	*6,900	5,300	
Front parallel dozer – rear stabilizer – lowered								*11,500	*11,500	11,400				*6,900	*6,900	*6,900	
Front stabilizer – rear stabilizer – lowered								*11,500	*11,500	*11,500				*6,900	*6,900	*6,900	
Wide axle – front empty – rear parallel dozer – lowered								11,400	8,700	7,700				*6,900	6,000	5,300	
Front empty – rear parallel dozer – raised	15 ft							11,000	8,400	6,700	7,600	5,700	4,500	6,700	5,000	3,900	
Front empty – rear parallel dozer – lowered								10,900	*12,300	7,400	7,500	*11,000	5,100	6,600	*6,700	4,400	
Front parallel dozer – rear stabilizer – lowered								*12,300	*12,300	11,100	*11,000	*11,000	7,600	*6,700	*6,700	6,700	26.84
Front stabilizer – rear stabilizer – lowered								*12,300	*12,300	*12,300	*11,000	*11,000	9,100	*6,700	*6,700	*6,700	
Wide axle – front empty – rear parallel dozer – lowered								11,000	8,400	7,400	7,600	5,700	5,000	6,700	5,000	4,300	
Front empty – rear parallel dozer – raised	10 ft							16,300	12,100	9,500	10,400	7,800	6,200	7,300	5,500	4,300	6,000
Front empty – rear parallel dozer – lowered								16,200	*18,200	10,600	10,400	*13,800	9,600	7,300	*11,500	4,800	6,000
Front parallel dozer – rear stabilizer – lowered								*18,200	*18,200	16,400	*13,800	*13,800	10,500	*11,500	*11,500	7,400	*6,800
Front stabilizer – rear stabilizer – lowered								*18,200	*18,200	*18,200	*13,800	*13,800	12,600	*11,500	*11,500	8,800	*6,800
Wide axle – front empty – rear parallel dozer – lowered								16,300	12,200	10,500	10,500	7,900	6,800	7,400	5,500	6,100	4,500
Front empty – rear parallel dozer – raised	5 ft							15,000	11,000	8,400	9,900	7,300	5,700	7,100	5,200	4,100	5,800
Front empty – rear parallel dozer – lowered								15,000	*20,900	9,500	9,800	*15,000	6,400	7,000	11,400	4,600	5,800
Front parallel dozer – rear stabilizer – lowered								*20,900	*20,900	15,200	*15,000	*15,000	10,000	*12,000	11,500	7,100	*7,200
Front stabilizer – rear stabilizer – lowered								*20,900	*20,900	18,700	*15,000	*15,000	12,000	*12,000	11,800	8,600	*7,200
Wide axle – front empty – rear parallel dozer – lowered								15,100	11,000	9,400	9,900	7,300	6,300	7,100	5,200	4,500	5,800
Front empty – rear parallel dozer – raised	0 ft							14,400	10,400	7,900	9,500	6,900	5,300	6,900	5,000	3,900	5,900
Front empty – rear parallel dozer – lowered								14,300	*21,500	9,000	9,400	*15,600	6,000	6,800	11,100	4,400	5,900
Front parallel dozer – rear stabilizer – lowered								*21,500	*21,500	14,600	*15,600	*15,600	9,600	*12,100	11,300	6,900	*8,000
Front stabilizer – rear stabilizer – lowered								*21,500	*21,500	18,000	*15,600	*15,600	11,600	*12,100	11,600	8,300	*8,000
Wide axle – front empty – rear parallel dozer – lowered								14,500	10,400	8,800	9,500	6,900	6,000	6,900	5,000	4,300	5,900
Front empty – rear parallel dozer – raised	-5 ft							*18,800	*18,800	14,200	14,200	10,200	7,700	9,300	6,700	5,200	6,800
Front empty – rear parallel dozer – lowered								*18,800	*18,800	16,400	14,100	*20,300	8,800	9,200	*15,000	5,900	6,800
Front parallel dozer – rear stabilizer – lowered								*18,800	*18,800	*18,800	*20,300	*20,300	14,400	*15,000	*15,000	9,400	*9,400
Front stabilizer – rear stabilizer – lowered								*18,800	*18,800	*18,800	*20,300	*20,300	17,800	*15,000	*15,000	12,700	*9,400
Wide axle – front empty – rear parallel dozer – lowered								*18,800	*18,800	16,100	14,300	10,200	8,700	9,300	6,800	5,800	6,800
Front empty – rear parallel dozer – raised	-10 ft							*22,900	20,200	14,500	14,300	10,300	7,800	9,300	6,800	5,200	7,600
Front empty – rear parallel dozer – lowered								*22,900	*22,900	16,800	14,300	*17,200	8,900	9,300	*12,700	5,900	7,600
Front parallel dozer – rear stabilizer – lowered								*22,900	*22,900	*22,900	*17,200	*17,200	14,500	*12,700	*12,700	9,400	*9,400
Front stabilizer – rear stabilizer – lowered								*22,900	*22,900	*22,900	*17,200	*17,200	17,200	*12,700	*12,700	11,400	*9,700
Wide axle – front empty – rear parallel dozer – lowered								*22,900	20,300	16,500	14,400	10,400	8,800	9,400	6,800	5,900	7,600

\*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Lift Capacities – One-Piece Boom 2500 mm Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 4200 kg, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height		
		Undercarriage configuration			3000 mm			4500 mm			6000 mm			7500 mm		
7500 mm	Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered															
6000 mm	Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered															
4500 mm	Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered															
3000 mm	Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered															
1500 mm	Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered															
0 mm	Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered															
-1500 mm	Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered															
-3000 mm	Front empty – rear parallel dozer – raised Front empty – rear parallel dozer – lowered Front parallel dozer – rear stabilizer – lowered Front stabilizer – rear stabilizer – lowered Wide axle – front empty – rear parallel dozer – lowered															

\*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Lift Capacities – One-Piece Boom 8'2" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 9,260 lb, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height			
Undercarriage configuration	ft	10 ft			15 ft			20 ft			25 ft			ft			
25 ft	Front empty – rear parallel dozer – raised													*9,200	*9,200	8,300	
	Front empty – rear parallel dozer – lowered													*9,200	*9,200	9,100	
	Front parallel dozer – rear stabilizer – lowered													*9,200	*9,200	18.80	
	Front stabilizer – rear stabilizer – lowered													*9,200	*9,200	*9,200	
	Wide axle – front empty – rear parallel dozer – lowered													*9,200	*9,200	9,000	
20 ft	Front empty – rear parallel dozer – raised							12,000	9,300	7,500				*8,300	7,200	5,800	
	Front empty – rear parallel dozer – lowered							11,900	*12,200	8,300				*8,300	*8,300	6,400	
	Front parallel dozer – rear stabilizer – lowered							*12,200	*12,200	12,100				*8,300	*8,300	*8,300	
	Front stabilizer – rear stabilizer – lowered							*12,200	*12,200	*12,200				*8,300	*8,300	*8,300	
	Wide axle – front empty – rear parallel dozer – lowered							12,000	9,300	8,200				*8,300	7,200	6,400	
15 ft	Front empty – rear parallel dozer – raised							*15,900	14,200	11,300	11,700	9,000	7,200	8,100	6,200	5,000	7,800
	Front empty – rear parallel dozer – lowered							*15,900	*15,900	12,500	11,600	*13,000	8,000	8,100	*10,400	5,500	7,800
	Front parallel dozer – rear stabilizer – lowered							*15,900	*15,900	*15,900	*13,000	*13,000	11,800	*10,400	*10,400	8,200	*8,000
	Front stabilizer – rear stabilizer – lowered							*15,900	*15,900	*15,900	*13,000	*13,000	*13,000	*10,400	9,700	*8,000	*8,000
	Wide axle – front empty – rear parallel dozer – lowered							*15,900	14,200	12,400	11,700	9,000	7,900	8,100	6,200	5,400	7,800
10 ft	Front empty – rear parallel dozer – raised							17,200	13,000	10,200	11,100	8,500	6,800	7,900	6,000	4,800	7,000
	Front empty – rear parallel dozer – lowered							17,100	*19,100	11,400	11,100	*14,300	7,500	7,900	*11,900	5,300	7,000
	Front parallel dozer – rear stabilizer – lowered							*19,100	*19,100	17,400	*14,300	*14,300	11,200	*11,900	*11,900	8,000	*8,200
	Front stabilizer – rear stabilizer – lowered							*19,100	*19,100	*19,100	*14,300	*14,300	13,400	*11,900	9,500	*8,200	*8,200
	Wide axle – front empty – rear parallel dozer – lowered							17,300	13,000	11,200	11,200	8,500	7,400	8,000	6,000	5,300	7,100
5 ft	Front empty – rear parallel dozer – raised							16,100	11,900	9,200	10,600	8,000	6,300	7,700	5,800	4,600	6,800
	Front empty – rear parallel dozer – lowered							16,000	*21,400	10,400	10,600	*15,400	7,100	7,600	12,200	5,100	6,700
	Front parallel dozer – rear stabilizer – lowered							*21,400	*21,400	16,300	*15,400	*15,400	10,700	*12,200	*12,200	7,800	*8,700
	Front stabilizer – rear stabilizer – lowered							*21,400	*21,400	19,900	*15,400	*15,400	12,800	*12,200	*12,200	9,200	*8,700
	Wide axle – front empty – rear parallel dozer – lowered							16,200	12,000	10,200	10,700	8,000	7,000	7,700	5,800	5,100	6,800
0 ft	Front empty – rear parallel dozer – raised							15,600	11,500	8,800	10,300	7,700	6,000	7,500	5,600	4,400	6,900
	Front empty – rear parallel dozer – lowered							15,500	*21,400	9,900	10,200	*15,600	6,700	7,500	12,000	5,000	6,900
	Front parallel dozer – rear stabilizer – lowered							*21,400	*21,400	15,800	*15,600	*15,600	10,400	*12,000	*12,000	7,600	*9,700
	Front stabilizer – rear stabilizer – lowered							*21,400	*21,400	19,300	*15,600	*15,600	12,500	*12,000	*12,000	9,100	*9,700
	Wide axle – front empty – rear parallel dozer – lowered							15,700	11,500	9,800	10,300	7,700	6,700	6,000	4,900	7,000	5,200
-5 ft	Front empty – rear parallel dozer – raised	*19,800	*19,800	16,100	15,500	11,400	8,700	10,200	7,600	5,900					7,600	*5,700	4,400
	Front empty – rear parallel dozer – lowered	*19,800	*19,800	18,500	15,400	*19,700	9,900	10,100	*14,700	6,600					7,500	*10,700	5,000
	Front parallel dozer – rear stabilizer – lowered	*19,800	*19,800	*19,800	*19,700	*19,700	15,700	*14,700	*14,700	10,300					*10,700	*10,700	7,700
	Front stabilizer – rear stabilizer – lowered	*19,800	*19,800	*19,800	*19,700	*19,700	19,200	*14,700	*14,700	12,400					*10,700	*10,700	9,100
	Wide axle – front empty – rear parallel dozer – lowered	*19,800	*19,800	18,200	15,600	11,400	9,700	10,200	7,600	6,500					7,600	5,700	4,900
-10 ft	Front empty – rear parallel dozer – raised	*20,400	*20,400	16,400	15,700	11,600	8,900	10,300	7,700	6,000					9,200	6,900	5,400
	Front empty – rear parallel dozer – lowered	*20,400	*20,400	18,800	15,600	*16,100	10,000	10,300	*11,800	6,700					9,200	*9,900	6,100
	Front parallel dozer – rear stabilizer – lowered	*20,400	*20,400	*20,400	*16,100	*16,100	15,900	*11,800	*11,800	10,400					*9,900	*9,900	9,300
	Front stabilizer – rear stabilizer – lowered	*20,400	*20,400	*20,400	*16,100	*16,100	*16,100	*11,800	*11,800	*11,800					*9,900	*9,900	*9,900
	Wide axle – front empty – rear parallel dozer – lowered	*20,400	*20,400	18,500	15,800	11,600	9,900	10,400	7,700	6,700					9,300	6,900	6,000

\*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Lift Capacities – One-Piece Boom 2900 mm Stick

All values are in kg, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 4200 kg, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height			
Undercarriage configuration	mm	3000 mm			4500 mm			6000 mm			7500 mm			mm			
		Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	Load at maximum reach (sticknose/bucket pin)	Load over front	Load over rear	
7500 mm	Front empty – rear parallel dozer – raised							*4600	4400	3550				*3400	*3400	3150	
	Front empty – rear parallel dozer – lowered							*4600	*4600	3900				*3400	*3400	*3400	
	Front parallel dozer – rear stabilizer – lowered							*4600	*4600	*4600				*3400	*3400	*3400	
	Front stabilizer – rear stabilizer – lowered							*4600	*4600	*4600				*3400	*3400	*3400	
	Wide axle – front empty – rear parallel dozer – lowered							*4600	4400	3900				*3400	*3400	*3400	
6000 mm	Front empty – rear parallel dozer – raised							*5250	4400	3550	*3200	2950	2350	*3150	2950	2350	
	Front empty – rear parallel dozer – lowered							*5250	*5250	3900	*3200	*3200	2600	*3150	*3150	2600	
	Front parallel dozer – rear stabilizer – lowered							*5250	*5250	*5250	*3200	*3200	*3200	*3150	*3150	*3150	
	Front stabilizer – rear stabilizer – lowered							*5250	*5250	*5250	*3200	*3200	*3200	*3150	*3150	*3150	
	Wide axle – front empty – rear parallel dozer – lowered							*5250	4400	3900	*3200	2950	2600	*3150	2950	2600	
4500 mm	Front empty – rear parallel dozer – raised							5450	4200	3400	3800	2900	2350	*3050	2450	1950	
	Front empty – rear parallel dozer – lowered							5450	*5700	3750	3800	*5050	2600	*3050	*3050	2200	
	Front parallel dozer – rear stabilizer – lowered							*5700	*5700	5500	*5050	*5050	3850	*3050	*3050	*3050	
	Front stabilizer – rear stabilizer – lowered							*5700	*5700	*5700	*5050	*5050	4550	*3050	*3050	*3050	
	Wide axle – front empty – rear parallel dozer – lowered							5500	4250	3700	3850	2900	2550	*3050	2450	2150	
3000 mm	Front empty – rear parallel dozer – raised							8100	6100	4800	5200	3950	3150	3700	2800	2250	2950
	Front empty – rear parallel dozer – lowered							8050	*8450	5350	5200	*6350	3500	3700	*5300	2500	2950
	Front parallel dozer – rear stabilizer – lowered							*8450	*8450	8200	*6350	*6350	5250	*5300	3750	*3100	
	Front stabilizer – rear stabilizer – lowered							*8450	*8450	*8450	*6350	*6350	*5300	4400	*3100	*3100	
	Wide axle – front empty – rear parallel dozer – lowered							8150	6150	5300	5250	4000	3500	3700	2800	2450	3000
1500 mm	Front empty – rear parallel dozer – raised							7550	5600	4300	4950	3750	2950	3550	2700	2100	2850
	Front empty – rear parallel dozer – lowered							7500	*9650	4850	4900	*6950	3300	3550	*5550	2350	2850
	Front parallel dozer – rear stabilizer – lowered							*9650	*9650	7600	*6950	*6950	5000	*5550	*5550	3600	
	Front stabilizer – rear stabilizer – lowered							*9650	*9650	9300	*6950	*6950	6000	*5550	*5550	4300	
	Wide axle – front empty – rear parallel dozer – lowered							7600	5600	4800	4950	3750	3250	3600	2700	2350	2900
0 mm	Front empty – rear parallel dozer – raised							7250	5300	4050	4750	3550	2750	3450	2600	2050	2900
	Front empty – rear parallel dozer – lowered							7200	*9950	4600	4750	*7200	3100	3450	5550	2300	2900
	Front parallel dozer – rear stabilizer – lowered							*9950	*9950	7350	*7200	*7200	4800	*5600	3500	*3650	
	Front stabilizer – rear stabilizer – lowered							*9950	*9950	9000	*7200	*7200	5800	*5600	4200	*3650	
	Wide axle – front empty – rear parallel dozer – lowered							7300	5350	4550	4800	3550	3050	3500	2600	2250	2200
-1500 mm	Front empty – rear parallel dozer – raised	*8300	*8300	7350	7150	5250	4000	4700	3450	2700	3450	2550	2000	3150	2350	1850	
	Front empty – rear parallel dozer – lowered	*8300	*8300	*8300	7100	*9350	4500	4650	*6900	3050	3400	*5200	2250	3150	*4250	2050	
	Front parallel dozer – rear stabilizer – lowered	*8300	*8300	*8300	*9350	*9350	7250	*6900	*6900	4750	*5200	*5200	3450	*4250	*4250	3200	
	Front stabilizer – rear stabilizer – lowered	*8300	*8300	*8300	*9350	*9350	8900	*6900	*6900	5700	*5200	*5200	4150	*4250	*4250	3800	
	Wide axle – front empty – rear parallel dozer – lowered	*8300	*8300	*8300	7200	5250	4450	4700	3500	3000	3450	2550	2200	3150	2350	2050	
-3000 mm	Front empty – rear parallel dozer – raised	*10600	10350	7500	7200	5300	4050	4700	3500	2700				3700	2800	2150	
	Front empty – rear parallel dozer – lowered	*10600	*10600	8600	7200	*7950	4550	4700	*5950	3050				3700	*4400	2450	
	Front parallel dozer – rear stabilizer – lowered	*10600	*10600	*10600	*7950	*7950	7300	*5950	*5950	4750				*4400	*4400	3750	
	Front stabilizer – rear stabilizer – lowered	*10600	*10600	*10600	*7950	*7950	*7950	*5950	*5950	5700				*4400	*4400	*4400	
	Wide axle – front empty – rear parallel dozer – lowered	*10600	10400	8450	7250	5300	4500	4750	3500	3000				3750	2800	2400	

\*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Lift Capacities – One-Piece Boom 9'6" Stick

All values are in lb, work tool: none, bucket cylinder and bucket linkage installed, counterweight: 9,260 lb, heavy lift function on.

		Load at maximum reach (sticknose/bucket pin)			Load over front			Load over rear			Load over side			Load point height			
Undercarriage configuration	25 ft	10 ft			15 ft			20 ft			25 ft			ft			
		Front empty	Front parallel dozer – raised	Front parallel dozer – lowered	Front parallel dozer	Front stabilizer – lowered	Front stabilizer – rear stabilizer – lowered										
Front empty – rear parallel dozer – raised								*9,100	*9,100	7,600				*7,600	*7,600	7,200	
Front empty – rear parallel dozer – lowered								*9,100	*9,100	8,400				*7,600	*7,600	7,600	
Front parallel dozer – rear stabilizer – lowered								*9,100	*9,100	9,100				*7,600	*7,600	20.57	
Front stabilizer – rear stabilizer – lowered								*9,100	*9,100	9,100				*7,600	*7,600	7,600	
Wide axle – front empty – rear parallel dozer – lowered								*9,100	*9,100	8,300				*7,600	*7,600	7,600	
Front empty – rear parallel dozer – raised	20 ft							*11,500	9,400	7,600				*6,900	6,600	5,300	
Front empty – rear parallel dozer – lowered								*11,500	*11,500	8,400				*6,900	*6,900	5,800	
Front parallel dozer – rear stabilizer – lowered								*11,500	*11,500	*11,500				*6,900	*6,900	6,900	
Front stabilizer – rear stabilizer – lowered								*11,500	*11,500	*11,500				*6,900	*6,900	6,900	
Wide axle – front empty – rear parallel dozer – lowered								*11,500	9,400	8,300				*6,900	6,600	5,800	
Front empty – rear parallel dozer – raised	15 ft							11,800	9,100	7,300	8,200	6,300	5,000	*6,700	5,500	4,400	
Front empty – rear parallel dozer – lowered								11,700	*12,300	8,100	8,100	*11,000	5,600	*6,700	*6,700	4,900	
Front parallel dozer – rear stabilizer – lowered								*12,300	*12,300	11,900	*11,000	*11,000	8,200	*6,700	*6,700	*6,700	
Front stabilizer – rear stabilizer – lowered								*12,300	*12,300	*11,000	*11,000	9,700	*6,700	*6,700	*6,700	26.84	
Wide axle – front empty – rear parallel dozer – lowered								11,800	9,100	8,000	8,200	6,300	5,500	*6,700	5,500	4,800	
Front empty – rear parallel dozer – raised	10 ft							17,400	13,200	10,400	11,200	8,600	6,800	7,900	6,000	4,800	6,600
Front empty – rear parallel dozer – lowered								17,400	*18,200	11,600	11,200	*13,800	*13,800	*11,500	5,400	*6,800	*6,800
Front parallel dozer – rear stabilizer – lowered								*18,200	*18,200	17,600	*13,800	*13,800	11,300	*11,500	*11,500	*6,800	
Front stabilizer – rear stabilizer – lowered								*18,200	*18,200	*18,200	*18,200	*18,200	13,500	*11,500	9,500	*6,800	
Wide axle – front empty – rear parallel dozer – lowered								17,500	13,200	11,400	11,300	8,600	7,500	8,000	6,100	4,900	4,300
Front empty – rear parallel dozer – raised	5 ft							16,200	12,100	9,300	10,700	8,000	6,300	7,700	5,800	4,600	6,300
Front empty – rear parallel dozer – lowered								16,200	*20,900	10,500	10,600	*15,000	7,100	7,600	*12,000	5,100	6,300
Front parallel dozer – rear stabilizer – lowered								*20,900	*20,900	16,400	*15,000	*15,000	10,800	*12,000	*12,000	*7,200	
Front stabilizer – rear stabilizer – lowered								*20,900	*20,900	20,000	*15,000	*15,000	12,900	*12,000	*12,000	*7,200	
Wide axle – front empty – rear parallel dozer – lowered								16,300	12,100	10,400	10,700	8,100	7,000	7,700	5,800	4,600	4,100
Front empty – rear parallel dozer – raised	0 ft							15,600	11,500	8,800	10,300	7,700	6,000	7,500	5,600	4,400	6,400
Front empty – rear parallel dozer – lowered								15,500	*21,500	9,900	10,200	*15,600	6,700	7,400	12,000	4,900	*8,000
Front parallel dozer – rear stabilizer – lowered								*21,500	*21,500	15,800	*15,600	*15,600	10,400	*12,100	*12,100	*8,000	
Front stabilizer – rear stabilizer – lowered								*21,500	*21,500	19,300	*15,600	*15,600	12,500	*12,100	*12,100	*8,000	
Wide axle – front empty – rear parallel dozer – lowered								15,700	11,500	9,800	10,300	7,700	6,600	7,500	5,600	4,800	4,200
Front empty – rear parallel dozer – raised	-5 ft							*18,800	*18,800	15,800	15,400	11,300	8,600	10,100	7,500	5,800	7,000
Front empty – rear parallel dozer – lowered								*18,800	*18,800	18,100	15,300	*20,300	9,700	10,000	*15,000	6,500	7,400
Front parallel dozer – rear stabilizer – lowered								*18,800	*18,800	*20,300	*20,300	15,600	*15,000	*15,000	10,200	*11,200	*11,200
Front stabilizer – rear stabilizer – lowered								*18,800	*18,800	*20,300	*20,300	19,100	*15,000	*15,000	12,300	8,900	*9,400
Wide axle – front empty – rear parallel dozer – lowered								*18,800	*18,800	17,800	15,500	11,300	9,600	10,100	7,500	6,500	7,000
Front empty – rear parallel dozer – raised	-10 ft							*22,900	22,200	16,100	15,500	11,400	8,700	10,100	7,500	5,900	8,300
Front empty – rear parallel dozer – lowered								*22,900	*22,900	18,500	15,500	*17,200	9,900	10,100	*12,700	6,600	8,200
Front parallel dozer – rear stabilizer – lowered								*22,900	*22,900	*22,900	*17,200	*17,200	15,700	*12,700	*12,700	10,200	
Front stabilizer – rear stabilizer – lowered								*22,900	*22,900	*22,900	*17,200	*17,200	*17,200	*12,700	*12,700	12,300	
Wide axle – front empty – rear parallel dozer – lowered								*22,900	22,200	18,200	15,600	11,400	9,700	10,200	7,600	6,500	8,300

\*Limited by hydraulic rather than tipping load.

Oscillating axle needs to be locked. Weight of all lifting accessories must be subtracted from the lifting capacities. All lift capacities calculated and rated per ISO 10567:2007. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Heavy Lift Function ON. Lifting capacities are based on the machine standing on a firm uniform supporting surface. The load point is the center line of the bucket pivot mounting pin on the stick. Lift capacity is calculated with VA cylinder completely extracted. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

# M320 Wheeled Excavator Specifications

## Bucket Specifications and Compatibility – Europe

Contact your Cat dealer for special bucket requirements.

	Width		Capacity		Weight		Fill		Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered																
	mm	in	m <sup>3</sup>	yd <sup>3</sup>	kg	lb	%																																	
<b>Pin-On (No Quick Coupler)</b>																																								
General Duty	1200	48	0.98	1.28	707	1,558	100	○	○	○	●	●	●	○	○	○	●	●	●	○	○	●	●	●	X	◇	●	●												
	1300	51	1.07	1.41	736	1,623	100	◇	○	●	●	●	●	○	●	●	●	●	●	○	◇	●	●	●	X	◇	●	●												
	1400	55	1.18	1.54	777	1,713	100	◇	○	●	●	●	●	X	◇	●	●	●	●	X	◇	●	●	●	X	X	◎	●												
Heavy Duty	900	36	0.68	0.88	628	1,384	100	○	●	●	●	●	●	○	●	●	●	●	●	○	●	●	●	●	○	○	●	●												
	1050	42	0.83	1.09	679	1,496	100	○	○	●	●	●	●	○	○	●	●	●	●	○	○	●	●	●	◇	○	●	●												
	1200	48	0.98	1.29	746	1,644	100	○	○	●	●	●	●	○	●	●	●	●	●	○	●	●	●	●	X	◇	●	●												
Ditch Cleaning Tilt	2000	79	1.23	1.61	1096	2,416	100	X	◇	●	●	X	X	○	●	X	X	○	●	X	X	○	●	X	X	○	●													
	Maximum load with pin-on (payload + bucket)		kg	1924	2200	3528	4267	1738	1995	3229	3911	1685	1950	3232	3944	1514	1760	2952	3609	kg	1781	2039	3288	3980	1611	1852	3018	3660	1551	1799	3005	3671	1394	1626	2752	3370				
			lb	4,242	4,849	7,779	9,406	3,833	4,398	7,119	8,622	3,715	4,299	7,126	8,694	3,337	3,881	6,509	7,957	lb	3,926	4,494	7,250	8,775	3,551	4,083	6,654	8,070	3,419	3,966	6,624	8,094	3,073	3,585	6,067	7,430				
<b>One-Piece Boom</b>																																								
General Duty	1200	48	0.98	1.28	707	1,558	100	◇	○	●	●	●	●	○	●	●	●	●	●	◇	●	●	●	X	◇	●	●													
	1300	51	1.07	1.41	736	1,623	100	◇	○	●	●	●	●	X	◇	●	●	●	●	X	◇	●	●	●	X	X	◎	●												
	1400	55	1.18	1.54	777	1,713	100	X	◇	●	●	●	●	X	◇	●	●	●	●	X	◇	●	●	●	X	X	○	●												
Heavy Duty	900	36	0.68	0.88	628	1,384	100	○	●	●	●	●	●	○	●	●	●	●	●	○	●	●	●	●	○	●	●	●												
	1050	42	0.83	1.09	679	1,496	100	○	○	●	●	●	●	○	●	●	●	●	●	○	●	●	●	●	◇	○	●	●												
	1200	48	0.98	1.29	746	1,644	100	○	○	●	●	●	●	○	●	●	●	●	●	X	◇	●	●	●	X	◇	●	●												
Ditch Cleaning Tilt	2000	79	1.23	1.61	1096	2,416	100	X	X	○	●	●	X	X	○	●	X	X	○	●	X	X	○	●	X	X	○	●												
	Maximum load with pin-on (payload + bucket)		kg	1781	2039	3288	3980	1611	1852	3018	3660	1551	1799	3005	3671	1394	1626	2752	3370	kg	1781	2039	3288	3980	1611	1852	3018	3660	1551	1799	3005	3671	1394	1626	2752	3370				
			lb	3,926	4,494	7,250	8,775	3,551	4,083	6,654	8,070	3,419	3,966	6,624	8,094	3,073	3,585	6,067	7,430	lb	3,926	4,494	7,250	8,775	3,551	4,083	6,654	8,070	3,419	3,966	6,624	8,094	3,073	3,585	6,067	7,430				

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled. Capacity based on ISO 7451.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

### Maximum Material Density:

● 2100 kg/m<sup>3</sup> (3,500 lb/yd<sup>3</sup>)

◎ 1800 kg/m<sup>3</sup> (3,000 lb/yd<sup>3</sup>)

○ 1500 kg/m<sup>3</sup> (2,500 lb/yd<sup>3</sup>)

◇ 1200 kg/m<sup>3</sup> (2,000 lb/yd<sup>3</sup>)

X Not Recommended

# M320 Wheeled Excavator Specifications

## Bucket Specifications and Compatibility – North America

Contact your Cat dealer for special bucket requirements.

	Width		Capacity		Weight		Fill %	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered																		
	mm	in	m <sup>3</sup>	yd <sup>3</sup>	kg	lb																																			
4200 kg (9,259 lb) Counterweight																																									
Pin-On (No Quick Coupler)																																									
General Duty	600	24	0.39	0.50	475	1,048	100	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●																
Heavy Duty	900	36	0.68	0.88	626	1,379	100	◎	●	●	●	●	○	○	○	○	○	○	●	●	●	●	●	●	●																
	1050	42	0.83	1.09	677	1,492	100	○	○	●	●	●	○	○	○	○	○	●	●	●	●	●	●	●	●																
Ditch Cleaning	1200	48	0.98	1.28	745	1,642	100	○	○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●																
	1500	60	1.01	1.32	651	1,436	100	○	○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●																
Ditch Cleaning Tilt	1800	72	1.24	1.62	740	1,630	100	◊	○	●	●	●	X	◊	●	●	●	X	◊	●	●	●	X	◊	●	●															
	1500	60	0.90	1.18	954	2,104	100	◊	○	●	●	●	◊	○	●	●	●	◊	○	●	●	X	◊	●	●																
	1800	72	1.11	1.45	1069	2,357	100	X	◊	●	●	X	X	○	●	●	X	◊	●	●	X	X	○	●	●																
	2000	79	1.23	1.61	1137	2,507	100	X	◊	●	●	X	X	○	●	●	X	X	○	●	X	X	○	●	●																
	Maximum load with pin-on (payload + bucket)		kg	1924	2200	3528	4267	1738	1995	3229	3911	1781	2039	3288	3980	1611	1852	3018	3660	kg	4,242	4,849	7,779	9,406	3,833	4,398	7,119	8,622	3,926	4,494	7,250	8,775	3,551	4,083	6,654	8,070					
4200 kg (9,259 lb) Counterweight																																									
With Pin Grabber Coupler																																									
General Duty	600	24	0.39	0.50	475	1,048	100	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●																
Heavy Duty	900	36	0.68	0.88	626	1,379	100	○	○	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●																
	1050	42	0.83	1.09	677	1,492	100	◊	○	●	●	●	X	◊	●	●	●	X	◊	●	●	●	X	◊	●	●															
Ditch Cleaning	1200	48	0.98	1.28	745	1,642	100	X	◊	●	●	X	X	●	●	●	X	◊	●	●	X	X	○	●	●																
	1500	60	1.01	1.32	651	1,436	100	X	◊	●	●	X	◊	●	●	●	X	◊	●	●	X	X	○	●	●																
Ditch Cleaning Tilt	1800	72	1.24	1.62	740	1,630	100	X	X	○	●	X	X	○	●	●	X	X	○	●	X	X	○	●	●																
	1500	60	0.90	1.18	954	2,104	100	X	◊	●	●	X	X	●	●	●	X	X	●	●	X	X	○	●	●																
	1800	72	1.11	1.45	1069	2,357	100	X	X	○	●	X	X	○	●	●	X	X	○	●	X	X	○	●	●																
	2000	79	1.23	1.61	1137	2,507	100	X	X	○	●	X	X	○	●	●	X	X	○	●	X	X	○	●	●																
	Maximum load with pin-on (payload + bucket)		kg	1503	1778	3107	3845	1317	1573	2808	3489	1359	1617	2867	3559	1189	1430	2597	3239	kg	3,313	3,920	6,849	8,477	2,903	3,468	6,190	7,693	2,996	3,565	6,320	7,846	2,621	3,154	5,724	7,140					
Maximum Material Density:																																									
● 2100 kg/m <sup>3</sup> (3,500 lb/yd <sup>3</sup> )																																									
○ 1800 kg/m <sup>3</sup> (3,000 lb/yd <sup>3</sup> )																																									
○ 1500 kg/m <sup>3</sup> (2,500 lb/yd <sup>3</sup> )																																									
◊ 1200 kg/m <sup>3</sup> (2,000 lb/yd <sup>3</sup> )																																									
X Not Recommended																																									

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

# M320 Wheeled Excavator Specifications

## Bucket Specifications and Compatibility – Australia and New Zealand

Contact your Cat dealer for special bucket requirements.

	Width		Capacity		Weight		Fill %	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels	Only dozer (blade) lowered	Dozer (blade) and two stabilizers (outrigger) lowered	Four stabilizers (outrigger) lowered	Free on wheels																			
	mm	in	m <sup>3</sup>	yd <sup>3</sup>	kg	lb																																					
4200 kg (9,259 lb) Counterweight																																											
Variable Adjustable Boom																																											
One-Piece Boom																																											
2500 mm (8'2") Stick																																											
2900 mm (9'6") Stick																																											
2500 mm (8'2") Stick																																											
2900 mm (9'6") Stick																																											
4200 kg (9,259 lb) Counterweight																																											
Variable Adjustable Boom																																											
One-Piece Boom																																											
2500 mm (8'2") Stick																																											
2900 mm (9'6") Stick																																											
With Pin Grabber Coupler																																											
General Duty	1200	48	1.00	1.31	692	1,525	100	○	○	○	●	●	○	◇	○	●	●	○	◇	○	●	●	○	●	●																		
Maximum load with pin-on (payload + bucket)					kg	1924	2200	3528	4267	1738	1995	3229	3911	1781	2039	3288	3980	1611	1852	3018	3660																						
Maximum load with pin-on (payload + bucket)					lb	4,242	4,849	7,779	9,406	3,833	4,398	7,119	8,622	3,926	4,494	7,250	8,775	3,551	4,083	6,654	8,070																						
With Pin Grabber Coupler																																											
General Duty	1200	48	1.00	1.31	692	1,525	100	X	○	◇	●	●	X	○	◇	●	●	X	○	●	●	X	X	○	●																		
Maximum load with pin-on (payload + bucket)					kg	1503	1778	3107	3845	1317	1573	2808	3489	1359	1617	2867	3559	1189	1430	2597	3239																						
Maximum load with pin-on (payload + bucket)					lb	3,313	3,920	6,849	8,477	2,903	3,468	6,190	7,693	2,996	3,565	6,320	7,846	2,621	3,154	5,724	7,140																						

### Maximum Material Density:

● 2100 kg/m<sup>3</sup> (3,500 lb/yd<sup>3</sup>)

○ 1800 kg/m<sup>3</sup> (3,000 lb/yd<sup>3</sup>)

○ 1500 kg/m<sup>3</sup> (2,500 lb/yd<sup>3</sup>)

○ 1200 kg/m<sup>3</sup> (2,000 lb/yd<sup>3</sup>)

◇ 900 kg/m<sup>3</sup> (1,500 lb/yd<sup>3</sup>)

X Not Recommended

The above loads are in compliance with hydraulic excavator standard EN474-5:2006+A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled. Capacity based on ISO 7451.

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

# M320 Wheeled Excavator Specifications

## Attachments Offering Guide – Europe (continued)

Not all attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

\* Working range front only

No Match

### TRS18-S70 ATTACHMENTS

Undercarriage		Rear Blade							
Counterweight		3600 kg (7,937 lb) Counterweight				4200 kg (9,259 lb) Counterweight			
Boom Type		Variable Adjustable	One-Piece Boom	Variable Adjustable	One-Piece Boom	Variable Adjustable	One-Piece Boom	Variable Adjustable	One-Piece Boom
Stick Length		2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")
Hydraulic Hammers	H115 GC S					✓*			
	H115 S					✓	✓*	✓*	
Compactors (Vibratory Plate)	CVP75	✓	✓*	✓*		✓	✓	✓	✓
	CVP110					✓	✓*	✓*	

### TRS18-S70 ATTACHMENTS

Undercarriage		Rear Blade (Wide Undercarriage)							
Counterweight		3600 kg (7,937 lb) Counterweight				4200 kg (9,259 lb) Counterweight			
Boom Type		Variable Adjustable	One-Piece Boom	Variable Adjustable	One-Piece Boom	Variable Adjustable	One-Piece Boom	Variable Adjustable	One-Piece Boom
Stick Length		2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")
Hydraulic Hammers	H115 GC S	✓*				✓	✓*	✓*	
	H115 S	✓	✓*	✓*		✓	✓	✓	✓*
Compactors (Vibratory Plate)	CVP75	✓	✓	✓	✓	✓	✓	✓	✓
	CVP110	✓	✓*	✓*		✓	✓	✓	✓*

# M320 Wheeled Excavator Specifications

## Attachments Offering Guide – North America

Not all attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match  No Match  1800 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>)  1200 kg/m<sup>3</sup> (2000 lb/yd<sup>3</sup>)

### PIN-ON ATTACHMENTS

Undercarriage		Rear Outrigger; Front Blade				Rear Outrigger; Front Outrigger			
Counterweight		4200 kg (9,259 lb) Counterweight				4200 kg (9,259 lb) Counterweight			
Boom Type		Variable Adjustable	One-Piece Boom	Variable Adjustable	One-Piece Boom	Variable Adjustable	One-Piece Boom	Variable Adjustable	One-Piece Boom
Stick Length		2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")
Hydraulic Hammers	H115 S	✓	✓	✓	✓	✓	✓	✓	✓
	H120 GC	✓	✓	✓	✓	✓	✓	✓	✓
	H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓
	H120 S	✓	✓	✓	✓	✓	✓	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓	✓	✓	✓	✓	✓	✓
	MP318 Demolition Jaw	✓	✓	✓	✓	✓	✓	✓	✓
	MP318 Pulverizer Jaw	✓	✓	✓	✓	✓	✓	✓	✓
	MP318 Shear Jaw	✓	✓	✓	✓	✓	✓	✓	✓
	MP318 Universal Jaw	✓	✓	✓	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G318	✓	✓	✓	✓	✓	✓	✓	✓
	G318 WH-800	✓	✓	✓	✓	✓	✓	✓	✓
Mobile Scrap and Demolition Shears	S3025	✓		✓	✓	✓		✓	✓
	S3025 Flat Top			✓				✓	
Pulverizers	P215	✓	✓	✓	✓	✓	✓	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓	✓	✓	✓	✓
Mulchers	HM4015	✓	✓	✓	✓	✓	✓	✓	✓
Orange Peel Grapples	GSH420-500	●	●	●	●	●	●	●	●
	GSH420-600	●	●	●	●	●	●	●	●
	GSH420-750	●	○	●	●	●	○	●	●
	GSH520-500	●	●	●	●	●	●	●	●
	GSH520-600	●	●	●	●	●	●	●	●
	GSH520-750	●	○	●	●	●	○	●	●

(continued on next page)

# M320 Wheeled Excavator Specifications

## Attachments Offering Guide – North America (continued)

Not all attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match    \* Working range front only    No Match    1800 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>)    1200 kg/m<sup>3</sup> (2000 lb/yd<sup>3</sup>)

### PIN-ON ATTACHMENTS

Undercarriage		Rear Blade; Front Outrigger				Rear Blade			
Counterweight		4200 kg (9,259 lb) Counterweight				4200 kg (9,259 lb) Counterweight			
Boom Type	Stick Length	Variable Adjustable		One-Piece Boom		Variable Adjustable		One-Piece Boom	
		2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")
Hydraulic Hammers	H115 S	✓	✓	✓	✓	✓	✓	✓	✓
	H120 GC	✓	✓	✓	✓	✓	✓	✓	✓*
	H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓*
	H120 S	✓	✓	✓	✓	✓	✓	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓	✓	✓	✓				
	MP318 Demolition Jaw	✓	✓	✓	✓				
	MP318 Pulverizer Jaw	✓	✓	✓	✓				
	MP318 Shear Jaw	✓	✓	✓	✓	✓*			
	MP318 Universal Jaw	✓	✓	✓	✓				
Demolition and Sorting Grapples	G318	✓	✓	✓	✓				
	G318 WH-800	✓	✓	✓	✓	✓*			
Mobile Scrap and Demolition Shears	S3025	✓		✓	✓				
	S3025 Flat Top			✓					
Pulverizers	P215	✓	✓	✓	✓	✓	✓*	✓*	✓*
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓	✓	✓	✓	✓
Mulchers	HM4015	✓	✓	✓	✓	✓	✓*	✓*	✓*
Orange Peel Grapples	GSH420-500	●	●	●	●	●	○	○	○
	GSH420-600	●	●	●	●	○	○	○	○
	GSH420-750	●	○	●	●	○			
	GSH520-500	●	●	●	●	○	○	○	○
	GSH520-600	●	●	●	●	○			
	GSH520-750	●	○	●	●				

(continued on next page)

# M320 Wheeled Excavator Specifications

## Attachments Offering Guide – North America (continued)

Not all attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match  No Match

### CAT PIN GRABBER COUPLER ATTACHMENTS

Undercarriage		Rear Outrigger; Front Blade				Rear Outrigger; Front Outrigger			
Counterweight		4200 kg (9,259 lb) Counterweight				4200 kg (9,259 lb) Counterweight			
Boom Type	Stick Length	Variable Adjustable	One-Piece Boom	Variable Adjustable	One-Piece Boom	Variable Adjustable	One-Piece Boom	Variable Adjustable	One-Piece Boom
		2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")
Hydraulic Hammers	H115 S	✓	✓	✓	✓	✓	✓	✓	✓
	H120 GC	✓	✓	✓	✓	✓	✓	✓	✓
	H120 GC S	✓	✓	✓	✓	✓	✓	✓	✓
	H120 S	✓	✓	✓	✓	✓	✓	✓	✓
Multi-Processors	MP318 Concrete Cutter Jaw	✓		✓		✓		✓	
	MP318 Demolition Jaw	✓		✓		✓		✓	
	MP318 Pulverizer Jaw			✓				✓	
	MP318 Shear Jaw	✓		✓		✓		✓	
	MP318 Universal Jaw	✓		✓		✓		✓	
Demolition and Sorting Grapples	G318	✓		✓		✓		✓	
	G318 WH-800	✓		✓		✓		✓	
Mobile Scrap and Demolition Shears	S3025	✓		✓		✓		✓	
	S3025 Flat Top	✓		✓		✓		✓	
Pulverizers	P215	✓		✓	✓	✓		✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓	✓	✓	✓	✓
Mulchers	HM4015	✓	✓	✓	✓	✓	✓	✓	✓

(continued on next page)

# M320 Wheeled Excavator Specifications

## Attachments Offering Guide – North America (continued)

Not all attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match    \* Working range front only    No Match

### CAT PIN GRABBER COUPLER ATTACHMENTS

Undercarriage		Rear Blade; Front Outrigger				Rear Blade			
Counterweight		4200 kg (9,259 lb) Counterweight				4200 kg (9,259 lb) Counterweight			
Boom Type		Variable Adjustable		One-Piece Boom		Variable Adjustable		One-Piece Boom	
Stick Length		2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")
Hydraulic Hammers	H115 S	✓	✓	✓	✓	✓	✓	✓	✓
	H120 GC	✓	✓	✓	✓				
	H120 GC S	✓	✓	✓	✓				
	H120 S	✓	✓	✓	✓	✓*			
Multi-Processors	MP318 Concrete Cutter Jaw	✓		✓					
	MP318 Demolition Jaw	✓		✓					
	MP318 Pulverizer Jaw			✓					
	MP318 Shear Jaw	✓		✓					
	MP318 Universal Jaw	✓		✓					
Demolition and Sorting Grapples	G318	✓		✓					
	G318 WH-800	✓		✓					
Mobile Scrap and Demolition Shears	S3025	✓		✓					
	S3025 Flat Top	✓	✓	✓					
Pulverizers	P215	✓	✓	✓	✓				
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓	✓	✓	✓	✓
Mulchers	HM4015	✓	✓	✓	✓				

# M320 Wheeled Excavator Specifications

## Attachments Offering Guide – Australia and New Zealand

Not all attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match    Working range front only    No Match

### PIN-ON ATTACHMENTS

Undercarriage		Rear Outrigger; Front Blade				Rear Outrigger; Front Outrigger			
Counterweight		4200 kg (9,259 lb) Counterweight				4200 kg (9,259 lb) Counterweight			
Boom Type		Variable Adjustable		One-Piece Boom		Variable Adjustable		One-Piece Boom	
Stick Length		2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")
Hydraulic Hammers	H115 S	✓	✓	✓	✓	✓	✓	✓	✓
	H120 GC	✓	✓	✓	✓	✓	✓	✓	✓
	H120 GCS	✓	✓	✓	✓	✓	✓	✓	✓
	H120 S	✓	✓	✓	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G318	✓	✓	✓	✓	✓	✓	✓	✓
Mobile Scrap and Demolition Shears	S3025	✓		✓	✓	✓		✓	✓

### PIN-ON ATTACHMENTS

Undercarriage		Rear Blade; Front Outrigger				Rear Blade			
Counterweight		4200 kg (9,259 lb) Counterweight				4200 kg (9,259 lb) Counterweight			
Boom Type		Variable Adjustable		One-Piece Boom		Variable Adjustable		One-Piece Boom	
Stick Length		2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")	2500 mm (8'2")	2900 mm (9'6")
Hydraulic Hammers	H115 S	✓	✓	✓	✓	✓	✓	✓	✓
	H120 GC	✓	✓	✓	✓	✓	✓	✓	✓
	H120 GCS	✓	✓	✓	✓	✓	✓	✓	✓
	H120 S	✓	✓	✓	✓	✓	✓	✓	✓
Demolition and Sorting Grapples	G318	✓	✓	✓	✓				✓*
Mobile Scrap and Demolition Shears	S3025	✓		✓	✓				

(continued on next page)

# M320 Standard and Optional Equipment

## Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional	Standard	Optional
<b>ENGINE</b>			<b>HYDRAULIC SYSTEM</b>	
Cat C4.4 Twin Turbo diesel engine (meets Tier 4 Final/Stage V emission standards)	✓		Boom, stick and bucket drift reduction valves	✓
Power mode selector	✓		Boom/stick lowering check valves	✓
One-touch low idle with automatic engine speed control	✓		Overload warning	✓
Automatic engine idle shutdown	✓		Electronic main control valve	✓
Work up to 3000 m (9,842 ft) above sea level without engine power de-rating	✓		Automatic hydraulic oil warm up	✓
52°C (125°F) high-ambient cooling capacity	✓		Element type main hydraulic filter	✓
Cold starting capability for -18°C (0°F)	✓		One-slider joysticks	✓
Double element air filter	✓		Two-slider joysticks	✓
Electric fuel priming pump	✓		Advanced Tool Control (one/two way high-pressure flow)	✓
On-demand electric cooling fans with auto-reverse function	✓		Second high pressure auxiliary circuit (one/two way high-pressure flow)	✓
Biodiesel capability up to B20	✓		Medium pressure auxiliary circuit (one/two way medium-pressure flow)	✓
			Heavy lift mode	✓
			Quick coupler circuit for Cat Pin Grabber and CW-type coupler	✓
			SmartBoom™	✓
			Ride control	✓
			Cat TRS support	✓
			Joystick steering	✓
			Separate dedicated swing pump	✓
			Automatic swing brake	✓
			Cat BIO HYDO Advanced biodegradable hydraulic oil	✓
			Adjustable hydraulic aggressiveness	✓
			Electronic pattern changer	✓

(continued on next page)

# M320 Standard and Optional Equipment

## Standard and Optional Equipment (continued)

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional	Standard	Optional
<b>UNDERCARRIAGE AND STRUCTURES</b>		<b>BOOM, STICKS AND LINKAGES</b>		
All wheel drive	✓	5650 mm (18'6") One-Piece boom	✓	
Automatic brake/axle lock	✓	5260 mm (17'3") Variable Adjustable boom	✓	
Creeper speed	✓	2500 mm (8'2") stick	✓	
Electronic swing and travel lock	✓	2900 mm (9'6") stick	✓	
Heavy-duty axles, advanced disc brake system and travel motor, adjustable braking force	✓	Bucket linkage, 320-family with lifting eye	✓	
Oscillating front axle, lockable, with remote greasing point	✓	Bucket linkage, 320-family without lifting eye	✓	
10.00-20 16 PR, dual tires	✓	<b>ELECTRICAL SYSTEM</b>		
11.00-20- 16 PR, dual tires	✓	LED lights on boom and cab	✓	
315/70R22.5, no gap dual tires <sup>(1)</sup>	✓	LED lights on chassis (left-hand, right-hand) and counterweight	✓	
445/70R 19.5, single tires	✓	Programmable time-delay LED working lights	✓	
Steps with tool box in undercarriage (left and right)	✓	Roading and indicator lights, front and rear	✓	
Two-piece drive shaft	✓	Maintenance free batteries	✓	
Two speed hydrostatic transmission	✓	Centralized electrical disconnect switch	✓	
Rear blade (parallel) undercarriage	✓	Electrical refueling pump	✓	
Rear blade (parallel) undercarriage wide axle gauge	✓			(continued on next page)
Rear blade (parallel)/front outrigger undercarriage	✓			
Rear blade (parallel)/front outrigger undercarriage wide axle gauge	✓			
Rear outrigger/front blade (parallel) undercarriage	✓			
Rear outrigger/front outrigger undercarriage	✓			
Fenders, front and rear, synthetic	✓			
Travel restraint bracket for grapple/ clamshell	✓			
3600 kg (7,937 kg) counterweight <sup>(1)</sup>	✓			
4200 kg (9,259 lb) counterweight	✓			

<sup>(1)</sup>Available in Europe only.

# M320 Standard and Optional Equipment

## Standard and Optional Equipment (continued)

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional	Standard	Optional
<b>TECHNOLOGY</b>			<b>SAFETY AND SECURITY</b>	
Cat Product Link™	✓		Rear and right-side-view cameras	✓
Remote Flash capability	✓		360° visibility	✓
Remote Troubleshoot capability	✓		Wide angle mirrors	✓
Compatibility with radios and base stations from Trimble	✓		Heated and remotely adjustable mirrors	✓
Capability to install 3D grade systems from Trimble	✓		Travel alarm	✓
Cat Grade with 2D	✓		Signal/warning horn	✓
Cat Grade with Advanced 2D	✓		Rotating beacon on cab and chassis	✓
Cat Grade with 3D	✓		Cat Asset tracker	✓
Cat Payload	✓		Neutral lever (lock out) for all controls	✓
2D E-Fence	✓		Ground-level accessible secondary engine shutoff switch in cab	✓
<b>SERVICE AND MAINTENANCE</b>			Bluetooth receiver	✓
Sampling ports for Scheduled Oil Sampling (S·O·S <sup>SM</sup> )	✓		Anti-skid plate and countersunk bolts on service platform	✓
Automatic lubrication system for implement and swing system	✓			

# M320 Attachments

## Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

### CAB

- 75 mm (3") retractable seat belt

### SAFETY AND SECURITY

- Bluetooth® key fob

### GUARDS

- Falling object guard system (not compatible with cab light cover, rain protector)
- Mesh guard full front (not compatible with cab light cover, rain protector)

## Cab Options

	Deluxe	Premium
Sound-suppressed ROPS cab	●	●
Heated seat with air-adjustable suspension	●	X
Heated and cooled seat with automatic adjustable suspension	X	●
Height-adjustable console, infinite with no tool	●	●
High-resolution 254 mm (10") LCD touchscreen monitor	●	●
Mechanical mirror	●	X
Electrical and adjustable heated mirror	X	●
Automatic bi-level air conditioner	●	●
Jog dial and shortcut keys for monitor control	●	●
Keyless push-to-start engine control	●	●
51 mm (2") orange seat belt	●	●
Unfastened seat belt warning	●	●
Bluetooth integrated radio (including USB, aux port and microphone)	●	●
2 x 12V DC outlets	●	●
Document storage	●	●
Cup and bottle holders	●	●
Openable two-piece front window (laminated)	●	○
Fixed one-piece front window (P5A classified)	X	○
Parallel wiper with washer	●	●
Fixed glass skylight	●	●
LED dome lights	●	●
Foot illumination	●	●
Roller rear sunscreen	X	●
Rear window emergency exit	●	●
Washable floor mat	●	●
Beacon ready	●	●
Falling Object Guard Structure (FOGS) "ready"	●	●
Vandalism guard "ready"	●	●
Two LED cab lights	●	●
Rainvisor	●	●

● Standard

○ Optional

X Not available

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at [www.cat.com](http://www.cat.com)

AEXQ2902-01 (12-2021)

Replaces AEXQ2902

Build Number: 07B

(N Am, Eur, Aus-NZ, S Korea)

© 2021 Caterpillar  
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.



# CATERPILLAR LIMITED WARRANTY

## For Selected Machine Models Designated by Caterpillar with 12 Month/Unlimited Hour Warranty

### Worldwide

Caterpillar Inc. or any of its subsidiaries ("Caterpillar") warrants the following products sold by it to be free from defects in material and workmanship:

- New earthmoving, construction, material handling, forestry product, paving product, compact wheel loader, mini hydraulic excavator, skid steer loader, multi terrain loader, and compact track loader machines designated by Caterpillar as having 12-months/unlimited hour warranty. See your Cat® dealer for a complete listing of covered models.
- Attachments/work tools installed on such machines prior to delivery (unless covered by the Cat Work Tool warranty statement or another manufacturer's warranty). Hammer tool points and compacting plates used on hydraulic hammers are not warranted.

An additional warranty against breakage is applicable to certain Cat ground engaging tools. An additional warranty against wear is applicable to all landfill compactor tips when used in residential waste landfills. Refer to the applicable warranty statements for coverage detail.

This warranty does not apply to:

- Cat Batteries
- Mobiltrac belts, rubber tracks used on multi terrain loaders, compact track loaders, and mini hydraulic excavators
- Cat Work Tools
- Select models designated by Caterpillar that are sold in India and China

These products are covered by other Caterpillar warranties. This warranty is subject to the following:

#### Warranty Period

For new machines and work tools/attachments the warranty period is 12-months/unlimited hours, starting from date of delivery to the first user.

#### Note:

- For hydraulic line's quick connect/disconnect components sold on compact wheel loaders, mini hydraulic excavators, skid steer loaders, multi terrain loaders, and compact track loader machines, the warranty period is 50 hours starting from the date of delivery to the first user.
- For Draglines, Electric Rope Shovels, Hard Rock Movers, Hard Rock Feeders; the warranty period is not to exceed 24 months from shipment of the last major component from the Caterpillar place of manufacture.

#### Caterpillar Responsibilities

If a defect in material or workmanship is found during the warranty period, Caterpillar will, during normal working hours and at a place of business of a Cat dealer or other source approved by Caterpillar:

- Provide (at Caterpillar's choice) new, remanufactured, or Caterpillar approved repaired parts or assembled components needed to correct the defect.

**Note:** New, remanufactured, or Caterpillar approved replacement parts provided under the terms of this warranty are warranted for the remainder of the warranty period applicable to the product in which installed as if such parts were original components of that product. Items replaced under this warranty become the property of Caterpillar.

- Replace lubricating oil, filters, antifreeze, and other service items made unusable by the defect.
- Provide reasonable and customary labor needed to correct the defect.

#### User Responsibilities

- The user is responsible for:
  - Providing proof of delivery date to the first user.

Labor costs, except as stated under "Caterpillar Responsibilities."

Transportation costs, except as stated under "Caterpillar Responsibilities."

Premium or overtime labor costs.

Parts shipping charges in excess of those that are considered usual and customary.

Local taxes, if applicable.

Costs to investigate complaints, unless the problem is caused by a defect in Caterpillar material or workmanship. Giving timely notice of a warrantable failure and promptly making the product available for repair.

Performance of the required maintenance (including use of proper fuel, oil, lubricants, and coolant) and items replaced due to normal wear and tear.

Allowing Caterpillar access to all electronically stored data.

#### Limitations

Caterpillar is not responsible for:

- Failures resulting from any use or installation that Caterpillar judges improper.
- Failures resulting from attachments, accessory items, and parts not sold or approved by Caterpillar.
- Failures resulting from abuse, neglect, and/or improper storage or repair.
- Failures resulting from user's delay in making the product available after being notified of a potential product problem.
- Failures resulting from unauthorized repair or adjustments, and unauthorized fuel setting changes.

*(Continued on the reverse side....)*

This warranty covers every major component of the products. Claims under this warranty should be submitted to a place of business of a Cat dealer or other source approved by Caterpillar. For further information concerning either the location to submit claims or Caterpillar as the issuer of this warranty, write Caterpillar Inc., 100 N. E. Adams St., Peoria, IL USA 61629, telephone 1 (309) 675-1000, or go to URL [www.cat.com](http://www.cat.com). Find Your Dealer

Caterpillar's obligations under this Limited Warranty are subject to, and shall not apply in contravention of, the laws, rules, regulations, directives, ordinances, orders, or statutes of the United States, or of any other applicable jurisdiction, without recourse or liability with respect to Caterpillar.

**A) For products operating outside of Australia, Fiji, Nauru, New Caledonia, New Zealand, Papua New Guinea, the Solomon Islands, and Tahiti, the following is applicable:**  
**NEITHER THE FOREGOING EXPRESS WARRANTY NOR ANY OTHER WARRANTY BY CATERPILLAR, EXPRESS OR IMPLIED, IS APPLICABLE TO ANY ITEM CATERPILLAR SELLS THAT IS WARRANTED DIRECTLY TO THE USER BY ITS MANUFACTURER.**

**THIS WARRANTY IS EXPRESSLY IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, EXCEPT CATERPILLAR EMISSION-RELATED COMPONENTS WARRANTY FOR NEW ENGINES, WHERE APPLICABLE. REMEDIES UNDER THIS WARRANTY ARE LIMITED TO THE PROVISION OF MATERIAL AND SERVICES, AS SPECIFIED HEREIN.**

CATERPILLAR IS NOT RESPONSIBLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

CATERPILLAR EXCLUDES ALL LIABILITY FOR OR ARISING FROM ANY NEGLIGENCE ON ITS PART OR ON THE PART OF ANY OF ITS EMPLOYEES, AGENTS, OR REPRESENTATIVES IN RESPECT OF THE MANUFACTURE, OR SUPPLY OF GOODS, OR THE PROVISION OF SERVICES RELATING TO THE GOODS.

**IF OTHERWISE APPLICABLE, THE VIENNA CONVENTION ON CONTRACTS FOR THE INTERNATIONAL SALE OF GOODS IS EXCLUDED IN ITS ENTIRETY.**

**B) For products operating in Australia, Fiji, Nauru, New Caledonia, New Zealand, Papua New Guinea, the Solomon Islands, and Tahiti, the following is applicable:**

**THIS WARRANTY IS IN ADDITION TO WARRANTIES AND CONDITIONS IMPLIED BY STATUTE AND OTHER STATUTORY RIGHTS AND OBLIGATIONS THAT BY ANY APPLICABLE LAW CANNOT BE EXCLUDED, RESTRICTED, OR MODIFIED ("MANDATORY RIGHTS"). ALL OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED (BY STATUTE OR OTHERWISE), ARE EXCLUDED. WITHOUT LIMITING THE FOREGOING PROVISIONS OF THIS PARAGRAPH, WHERE A PRODUCT IS SUPPLIED FOR BUSINESS PURPOSES, THE CONSUMER GUARANTEES UNDER THE CONSUMER GUARANTEES ACT 1993 (NZ) WILL NOT APPLY.**

**NEITHER THIS WARRANTY NOR ANY OTHER CONDITION OR WARRANTY BY CATERPILLAR, EXPRESS OR IMPLIED (SUBJECT ONLY TO THE MANDATORY RIGHTS), IS APPLICABLE TO ANY ITEM CATERPILLAR SELLS THAT IS WARRANTED DIRECTLY TO THE USER BY ITS MANUFACTURER.**

**IF THE MANDATORY RIGHTS MAKE CATERPILLAR LIABLE IN CONNECTION WITH SERVICES OR GOODS, THEN TO THE EXTENT PERMITTED UNDER THE MANDATORY RIGHTS THAT LIABILITY SHALL BE LIMITED AT CATERPILLAR'S OPTION TO (a) IN THE CASE OF SERVICES, THE SUPPLY OF THE SERVICES AGAIN OR THE PAYMENT OF THE COST OF HAVING THE SERVICES SUPPLIED AGAIN AND (b) IN THE CASE OF GOODS, THE REPAIR OR REPLACEMENT OF THE GOODS, THE SUPPLY OF EQUIVALENT GOODS, THE PAYMENT OF THE COST OF SUCH REPAIR OR REPLACEMENT OR THE ACQUISITION OF EQUIVALENT GOODS.**

**CATERPILLAR EXCLUDES ALL LIABILITY FOR OR ARISING FROM ANY NEGLIGENCE ON ITS PART OR ON THE PART OF ANY OF ITS EMPLOYEES, AGENTS OR REPRESENTATIVES IN RESPECT OF THE MANUFACTURE, OR SUPPLY OF GOODS OR THE PROVISION OF SERVICES RELATING TO THE GOODS.**

**CATERPILLAR IS NOT LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES UNLESS IMPOSED UNDER MANDATORY RIGHTS.**  
**IF OTHERWISE APPLICABLE, THE VIENNA CONVENTION (CONTRACTS FOR THE INTERNATIONAL SALE OF GOODS) IS EXCLUDED IN ITS ENTIRETY.**

**C) For products supplied in Australia:**  
**IF THE PRODUCTS TO WHICH THIS WARRANTY APPLIES ARE:**

**I. PRODUCTS OF A KIND ORDINARILY ACQUIRED FOR PERSONAL, DOMESTIC OR HOUSEHOLD USE OR CONSUMPTION; OR**

**II. PRODUCTS THAT COST AUD 40,000 OR LESS,**

**WHERE THOSE PRODUCTS WERE NOT ACQUIRED FOR THE PURPOSE OF RE-SUPPLY OR FOR THE PURPOSE OF USING THEM UP OR TRANSFORMING THEM IN THE COURSE OF PRODUCTION OR MANUFACTURE OR IN THE COURSE OF REPAIRING OTHER GOODS OR FIXTURES, THEN THIS SECTION C APPLIES.**

**THE FOLLOWING MANDATORY TEXT IS INCLUDED PURSUANT TO THE AUSTRALIAN CONSUMER LAW AND INCLUDES REFERENCES TO RIGHTS THE USER MAY HAVE AGAINST THE DIRECT SUPPLIER OF THE PRODUCTS: OUR GOODS COME WITH GUARANTEES THAT CANNOT BE EXCLUDED UNDER THE AUSTRALIAN CONSUMER LAW. YOU ARE ENTITLED TO A REPLACEMENT OR REFUND FOR A MAJOR FAILURE AND COMPENSATION FOR ANY OTHER REASONABLY FORESEEABLE LOSS OR DAMAGE. YOU ARE ALSO ENTITLED TO HAVE THE GOODS REPAIRED OR REPLACED IF THE GOODS FAIL TO BE OF ACCEPTABLE QUALITY AND THE FAILURE DOES NOT AMOUNT TO A MAJOR FAILURE. THE INCLUSION OF THIS TEXT DOES NOT CONSTITUTE ANY REPRESENTATION OR ACCEPTANCE BY CATERPILLAR OF LIABILITY TO THE USER OR ANY OTHER PERSON IN ADDITION TO THAT WHICH CATERPILLAR MAY HAVE UNDER THE AUSTRALIAN CONSUMER LAW.**  
**TO THE EXTENT THE PRODUCTS FALL WITHIN THIS SECTION C BUT ARE NOT OF A KIND ORDINARILY ACQUIRED FOR PERSONAL, DOMESTIC OR HOUSEHOLD USE OR CONSUMPTION, CATERPILLAR LIMITS ITS LIABILITY TO THE EXTENT IT IS PERMITTED TO DO SO UNDER THE AUSTRALIAN CONSUMER LAW TO, AT ITS OPTION, THE REPAIR OR REPLACEMENT OF THE PRODUCTS, THE SUPPLY OF EQUIVALENT PRODUCTS, OR THE PAYMENT OF THE COST OF SUCH REPAIR OR REPLACEMENT OR THE ACQUISITION OF EQUIVALENT PRODUCTS.**

**THE WARRANTY SET OUT IN THIS DOCUMENT IS GIVEN BY CATERPILLAR INC. OR ANY OF ITS SUBSIDIARIES, 100 N. E. ADAMS ST, PEORIA, IL USA 61629, TELEPHONE 1 309 675 1000. THE USER IS RESPONSIBLE FOR ALL COSTS ASSOCIATED WITH MAKING A CLAIM UNDER THE WARRANTY SET OUT IN THIS DOCUMENT, EXCEPT AS EXPRESSLY STATED OTHERWISE IN THIS DOCUMENT, AND THE USER IS REFERRED TO THE BALANCE OF THE DOCUMENT TERMS CONCERNING CLAIM PROCEDURES, CATERPILLAR RESPONSIBILITIES AND USER RESPONSIBILITIES.**

**TO THE EXTENT PERMISSIBLE BY LAW, THE TERMS SET OUT IN THE REMAINDER OF THIS WARRANTY DOCUMENT (INCLUDING SECTION B) CONTINUE TO APPLY TO PRODUCTS TO WHICH THIS SECTION C APPLIES.**

**© 2019 Caterpillar. All Rights Reserved.**  
**CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.**

# CONTROL YOUR COSTS MINIMIZE YOUR RISKS

This plan safeguards your investments in new, used and rebuilt machines beyond the standard warranty period. It includes all parts and labor to protect you against failures caused by defects in materials and workmanship. With the Powertrain Equipment Protection Plan, you can increase the predictability of service and maintenance costs—and reduce unplanned downtime.

## WHAT WE DO

- Perform necessary inspections to confirm eligibility
- Install parts approved by Caterpillar on covered repairs
- Validate your enrollment in the program

## WHAT YOU DO

- Operate equipment according to the Cat Operation & Maintenance Manual (OMM)
- Have recommended preventive maintenance performed at intervals specified in the OMM
- Upon request, provide proof of preventive maintenance compliance (receipts, copies of work orders, invoices)
- Promptly provide the machine for repair in the event of a covered failure

## COVERED COMPONENTS

### Engines & Accessories

- Camshaft & Camshaft Bearings
- Timing / Accessory Gears
- Timing Chain / Belt
- Inlet / Exhaust Valve
- Manifolds
- Fan Motor
- Water Pump
- Fuel Injection Pumps
- Injectors
- Lift / Transfer Pump
- Senders / Solenoids / Sensors
- Thermostat
- Flywheel & Torque Converter
- Engine Oil Filter Mount
- Turbocharger
- AC Compressor / Condenser
- Electronic Control Modules
- Oil Hoses / Lines (non-hydrostatic)
- Cylinder Block
- Piston
- Piston Rings
- Piston & Connecting Rod
- Crankshaft, Main Bearings & Rod Bearings

### Hydrostatic Pumps &

- Drive Motors
- Linkage / lines Connected to Hystat Pump
- Drive (pilot / eh) Control Valves
- Bevel and Transfer Case

### Drive Line/Drive Axle

- Axles
- Axle Seals
- Final Drive & Wheel Final Drive Case / Bore
- Final Drive Chain
- Final Drive Gears
- Axle Shaft
- Drive Axle Oil Pump

### Steering

- Steering Clutch
- Steering Clutch & Brake Control Valve

### Hydraulic Systems

- Hydraulic Oil Coolers

## EXCLUSIONS

If a component is not listed, it may not be included in the plan. Other exclusions include:

- > Improper or abusive use of the machine
- > Lubricating oil, antifreeze, filters, consumables and other maintenance items replaced during the covered component repair, unless such items are rendered unusable by a covered component failure
- > Failures caused by normal wear-out
- > Freight charges for parts shipments
- > Travel time and mileage involved in getting to a job site
- > Hauling costs and / or retrieval costs
- > Overtime labor costs
- > Repair costs resulting from the failure of any non-covered components
- > Downtime loss
- > Equipment rental charges
- > Any incidental / consequential damages or costs incurred as a result of a covered component failure.
- > Modifications unless approved by Caterpillar

Examples of covered and excluded components or items are listed here. The actual dealer contract will govern. For a complete list of included components and more information on Cat Equipment Protection Plans, contact your local Cat dealer.



Click any for help

[Home](#)[My Cases](#)[New Case](#)[View Cases](#)[Search Cases](#)[My Profile](#)[Edit Profile](#)[Change Password](#)[Change Security Questions](#)[My Company](#)[Edit Company Profile](#)[Add New User](#)[View Existing Users](#)[Close Company Account](#)[My Reports](#)[View Reports](#)[My Resources](#)[View Essential Resources](#)[Take Tutorial](#)[View User Manual](#)[Contact Us](#)

## Company Information

Company Name: Thompson Tractor Co., Inc.

[View / Edit](#)

Company ID Number: 47130

Doing Business As (DBA)  
Name:

DUNS Number:

**Physical Location:**

Address 1: 2401 Pinson Highway

Address 2:

City: Birmingham

State: AL

Zip Code: 35217

County: JEFFERSON

**Mailing Address:**

Address 1: P O. Box 10367

Address 2:

City: Birmingham

State: AL

Zip Code: 35202-0367

**Additional Information:**

Employer Identification Number: 630377478

Total Number of Employees: 1,000 to 2,499

Parent Organization:

Administrator:

Organization Designation:

Employer Category:

NAICS Code: 423 - MERCHANT WHOLESALERS, DURABLE GOODS

[View / Edit](#)

Total Hiring Sites: 40

[View / Edit](#)

Total Points of Contact: 3

[View / Edit](#)[View / Edit](#)

**Request for Taxpayer Identification Number and Certification**

Give form to the requester. Do not send to the IRS.

<b>Print or type</b>  See Specific Instructions on page 2.	Name (as shown on your income tax return) <b>Thompson Tractor Co., Inc. DBA Thompson Power Systems, Thompson Lift Truck Co.</b>	
	Business name, if different from above <b>and The Cat Rent Store</b>	
Check appropriate box: <input type="checkbox"/> Individual/Sole proprietor <input checked="" type="checkbox"/> Corporation <input type="checkbox"/> Partnership <input type="checkbox"/> Limited liability company. Enter the tax classification (D=disscogned entity, C=corporation, P=partnership) > ..... <input type="checkbox"/> Other (see instructions) > .....		<input checked="" type="checkbox"/> Exempt payee
Address (number, street, and apt. or suite no.) <b>P O Box 10367 2401 Pinson Hwy. Tarrant, AL 35217</b>		Requester's name and address (optional)
City, state, and ZIP code <b>Birmingham, AL 35202-0367</b>		
List account number(s) here (optional) <b>Lockbox Remit To: P O Box 934085, Atlanta, GA 31193-4005</b>		

**TIN** Taxpayer Identification Number (TIN)

Enter your TIN in the appropriate box. The TIN provided must match the name given on Line 1 to avoid backup withholding. For individuals, this is your social security number (SSN). However, for a resident alien, sole proprietor, or disregarded entity, see the Part I Instructions on page 3. For other entities, it is your employer identification number (EIN). If you do not have a number, see *How to get a TIN* on page 3.

Note. If the account is in more than one name, see the chart on page 4 for guidelines on whose number to enter.

**Social security number**  
: : : : : :

or

**Employer identification number**  
63 : 0377478

**PATR** Certification

Under penalties of perjury, I certify that:

1. The number shown on this form is my correct taxpayer identification number (or I am waiting for a number to be issued to me), and
2. I am not subject to backup withholding because: (a) I am exempt from backup withholding, or (b) I have not been notified by the Internal Revenue Service (IRS) that I am subject to backup withholding as a result of a failure to report all interest or dividends, or (c) the IRS has notified me that I am no longer subject to backup withholding, and
3. I am a U.S. citizen or other U.S. person (defined below).

**Certification Instructions.** You must cross out Item 2 above if you have been notified by the IRS that you are currently subject to backup withholding because you have failed to report all interest and dividends on your tax return. For real estate transactions, Item 2 does not apply. For mortgage interest paid, acquisition or abandonment of secured property, cancellation of debt, contributions to an individual retirement arrangement (IRA), and generally, payments other than interest and dividends, you are not required to sign the Certification, but you must provide your correct TIN. See the instructions on page 4.

<b>Sign Here</b>	<b>Signature of U.S. person</b> <i>Linda X Duncan, Controller</i>	<b>Date</b> <b>&gt;</b>
------------------	---	-------------------------

**General Instructions**

Section references are to the Internal Revenue Code unless otherwise noted.

**Purpose of Form**

A person who is required to file an information return with the IRS must obtain your correct taxpayer identification number (TIN) to report, for example, income paid to you, real estate transactions, mortgage interest you paid, acquisition or abandonment of secured property, cancellation of debt, or contributions you made to an IRA.

Use Form W-9 only if you are a U.S. person (including a resident alien), to provide your correct TIN to the person requesting it (the requester) and, when applicable, to:

1. Certify that the TIN you are giving is correct (or you are waiting for a number to be issued),
2. Certify that you are not subject to backup withholding, or
3. Claim exemption from backup withholding if you are a U.S. exempt payee. If applicable, you are also certifying that as a U.S. person, your allocable share of any partnership income from a U.S. trade or business is not subject to the withholding tax on foreign partners' share of effectively connected income.

Note. If a requester gives you a form other than Form W-9 to request your TIN, you must use the requester's form if it is substantially similar to this Form W-9.

**Definition of a U.S. person.** For federal tax purposes, you are considered a U.S. person if you are:

- An individual who is a U.S. citizen or U.S. resident alien,
- A partnership, corporation, company, or association created or organized in the United States or under the laws of the United States,
- An estate (other than a foreign estate), or
- A domestic trust (as defined in Regulations section 301.7701-7).

**Special rules for partnerships.** Partnerships that conduct a trade or business in the United States are generally required to pay a withholding tax on any foreign partners' share of income from such business. Further, in certain cases where a Form W-9 has not been received, a partnership is required to presume that a partner is a foreign person, and pay the withholding tax. Therefore, if you are a U.S. person that is a partner in a partnership conducting a trade or business in the United States, provide Form W-9 to the partnership to establish your U.S. status and avoid withholding on your share of partnership income.

The person who gives Form W-9 to the partnership for purposes of establishing its U.S. status and avoiding withholding on its allocable share of net income from the partnership conducting a trade or business in the United States is in the following cases:

- The U.S. owner of a disregarded entity and not the entity.

Company ID Number: 47130

the Employer issues a tentative nonconfirmation based upon a photo non-match. The Employer will determine whether the employee contests the tentative nonconfirmation as soon as possible after the Employer receives it.

4. If the employee contests a tentative nonconfirmation issued by DHS, the Employer will provide the employee with a referral letter and instruct the employee to contact the Department through its toll-free hotline within 8 Federal Government work days.

5. If the employee contests a tentative nonconfirmation based upon a photo non-match, the Employer will provide the employee with a referral letter to DHS. DHS will electronically transmit the result of the referral to the Employer within 10 Federal Government work days of the referral unless it determines that more than 10 days is necessary.

6. The Employer agrees that if an employee contests a tentative nonconfirmation based upon a photo non-match, the Employer will send a copy of the employee's Form I-551 or Form I-766 to DHS for review by:

- Scanning and uploading the document, or
- Sending a photocopy of the document by an express mail account (furnished and paid for by DHS).

7. The Employer understands that if it cannot determine whether there is a photo match/non-match, the Employer is required to forward the employee's documentation to DHS by scanning and uploading, or by sending the document as described in the preceding paragraph, and resolving the case as specified by the Immigration Services Verifier at DHS who will determine the photo match or non-match.

## ARTICLE IV

### **SERVICE PROVISIONS**

The SSA and DHS will not charge the Employer for verification services performed under this MOU. The Employer is responsible for providing equipment needed to make inquiries. To access the E-Verify System, an Employer will need a personal computer with Internet access.

## ARTICLE V

### **PARTIES**

This MOU is effective upon the signature of all parties, and shall continue in effect for as long as the SSA and DHS conduct the E-Verify program unless modified in writing by the mutual consent of all parties, or terminated by any party upon 30 days prior written notice to the others. Any and all system enhancements to the E-Verify program by DHS or SSA, including but not limited to the E-Verify checking against additional data sources and instituting new verification procedures, will be covered under this MOU and will not cause the need for a supplemental MOU that outlines these changes. DHS agrees to train employers on all changes made to E-Verify through the use of mandatory refresher tutorials and updates to the E-Verify manual. Even

Company ID Number: 47130

without changes to E-Verify, the Department reserves the right to require employers to take mandatory refresher tutorials.

Termination by any party shall terminate the MOU as to all parties. The SSA or DHS may terminate this MOU without prior notice if deemed necessary because of the requirements of law or policy, or upon a determination by SSA or DHS that there has been a breach of system integrity or security by the Employer, or a failure on the part of the Employer to comply with established procedures or legal requirements. Some or all SSA and DHS responsibilities under this MOU may be performed by contractor(s), and SSA and DHS may adjust verification responsibilities between each other as they may determine.

Nothing in this MOU is intended, or should be construed, to create any right or benefit, substantive or procedural, enforceable at law by any third party against the United States, its agencies, officers, or employees, or against the Employer, its agents, officers, or employees.

Each party shall be solely responsible for defending any claim or action against it arising out of or related to E-Verify or this MOU, whether civil or criminal, and for any liability wherefrom, including (but not limited to) any dispute between the Employer and any other person or entity regarding the applicability of Section 403(d) of IIRIRA to any action taken or allegedly taken by the Employer.

The employer understands that the fact of its participation in E-Verify is not confidential information and may be disclosed as authorized or required by law and DHS or SSA policy, including but not limited to, Congressional oversight, E-Verify publicity and media inquiries, and responses to inquiries under the Freedom of Information Act (FOIA).

The foregoing constitutes the full agreement on this subject between the SSA, DHS, and the Employer.

The individuals whose signatures appear below represent that they are authorized to enter into this MOU on behalf of the Employer and DHS respectively.

**To be accepted as a participant in E-Verify, you should only sign the Employer's Section of the signature page. If you have any questions, contact E-Verify Operations at 888-464-4218.**

Employer **Thompson Tractor Co., Inc.**

**Frank M Wright**

Name (Please type or print) \_\_\_\_\_ Title \_\_\_\_\_

*Electronically Signed*

07/11/2007

Signature

Date

Department of Homeland Security – Verification Division

Company ID Number: 47130

**INFORMATION REQUIRED  
FOR THE E-VERIFY PROGRAM**

Information relating to your Company:

Company Name: Thompson Tractor Co., Inc.

Company Facility Address: 2401 Pinson Highway  
Birmingham, AL 35217

Company Alternate Address: P.O. Box 10367  
Birmingham, AL 35202-0367

County or Parish: JEFFERSON

Employer Identification Number: 630377478

North American Industry  
Classification Systems Code: 423

Parent Company: \_\_\_\_\_

Number of Employees: 1,000 to 2,499 Number of Sites Verified for: 5

Are you verifying for more than 1 site? If yes, please provide the number of sites verified for in each State.

• GEORGIA 5 site(s)

Information relating to the Program Administrator(s) for your Company on policy questions or operational problems:

Name: Kimberly A Stark  
Telephone Number: (205) 849 - 4279 Fax Number: (205) 849 - 4565  
E-mail Address: kimberlystark@thompsontractor.com

Name: Frank M Wright  
Telephone Number: (205) 849 - 4267 Fax Number: (205) 849 - 4854  
E-mail Address: frankwright@thompsontractor.com

Company ID Number: 47130

**USCIS Verification Division**

Name (Please type or print)	Title
<i>Electronically Signed</i>	07/11/2007
Signature	Date



Click any for help

[Home](#)[My Cases](#)[New Case](#)[View Cases](#)[Search Cases](#)[Edit Profile](#)[Change Password](#)[Change Security Questions](#)[My Company](#)[Edit Company Profile](#)[Add New User](#)[View Existing Users](#)[Close Company Account](#)[My Reports](#)[View Reports](#)[My Resources](#)[View Essential Resources](#)[Take Tutorial](#)[View User Manual](#)[Contact Us](#)

## Company Information

Company Name: **Thompson Tractor Co., Inc.**[View / Edit](#)Company ID Number: **47130**Doing Business As (DBA)  
Name:

DUNS Number:

**Physical Location:**Address 1: **2401 Pinson Highway****Mailing Address:**Address 1: **P O. Box 10367**

Address 2:

Address 2:

City: **Birmingham**City: **Birmingham**State: **AL**State: **AL**Zip Code: **35217**Zip Code: **35202-0367**County: **JEFFERSON****Additional Information:**Employer Identification Number: **630377478**Total Number of Employees: **1,000 to 2,499**

Parent Organization:

Administrator:

Organization Designation:

Employer Category:

NAICS Code: **423 - MERCHANT WHOLESALERS, DURABLE GOODS**[View / Edit](#)Total Hiring Sites: **40**[View / Edit](#)Total Points of Contact: **3**[View / Edit](#)[View MOU](#)

Request for Taxpayer  
Identification Number and Certification

Give form to the  
requester. Do not  
send to the IRS.

Print or type See Specific Instructions on page 2.	Name (as shown on your income tax return) <b>Thompson Tractor Co., Inc. DBA Thompson Power Systems, Thompson Lift Truck Co., and The Cat Rent Store</b>	
	Check appropriate box: <input type="checkbox"/> Individual/Sole proprietor <input checked="" type="checkbox"/> Corporation <input type="checkbox"/> Partnership <input type="checkbox"/> Limited liability company. Enter the tax classification (D=disregarded entity, C=corporation, P=partnership) ► ..... <input type="checkbox"/> Other (see instructions) ►	
Address (number, street, and apt. or suite no.) <b>P O Box 10367 2401 Pinson Hwy. Tarrant, AL 35217</b>		Requester's name and address (optional)
City, state, and ZIP code <b>Birmingham, AL 35202-0367</b>		
List account number(s) here (optional) <b>Lockbox Remit To: P O Box 934005, Atlanta, GA 31193-4005</b>		
<b>Part I Taxpayer Identification Number (TIN)</b>		

Enter your TIN in the appropriate box. The TIN provided must match the name given on Line 1 to avoid backup withholding. For individuals, this is your social security number (SSN). However, for a resident alien, sole proprietor, or disregarded entity, see the Part I Instructions on page 3. For other entities, it is your employer identification number (EIN). If you do not have a number, see *How to get a TIN* on page 3.

Note. If the account is in more than one name, see the chart on page 4 for guidelines on whose number to enter.

**Social security number**  
: : :

or

**Employer identification number**  
63 : 0377478

**Part II Certification**

Under penalties of perjury, I certify that:

1. The number shown on this form is my correct taxpayer identification number (or I am waiting for a number to be issued to me), and
2. I am not subject to backup withholding because: (a) I am exempt from backup withholding, or (b) I have not been notified by the Internal Revenue Service (IRS) that I am subject to backup withholding as a result of a failure to report all interest or dividends, or (c) the IRS has notified me that I am no longer subject to backup withholding, and
3. I am a U.S. citizen or other U.S. person (defined below).

**Certification Instructions.** You must cross out Item 2 above if you have been notified by the IRS that you are currently subject to backup withholding because you have failed to report all interest and dividends on your tax return. For real estate transactions, Item 2 does not apply. For mortgage interest paid, acquisition or abandonment of secured property, cancellation of debt, contributions to an individual retirement arrangement (IRA), and generally, payments other than interest and dividends, you are not required to sign the Certification, but you must provide your correct TIN. See the instructions on page 4.

Sign Here	Signature of U.S. person ► <i>Linda X. Duncan, Controller</i>	Date ►
--------------	--	--------

**General Instructions**

Section references are to the Internal Revenue Code unless otherwise noted.

**Purpose of Form**

A person who is required to file an information return with the IRS must obtain your correct taxpayer identification number (TIN) to report, for example, income paid to you, real estate transactions, mortgage interest you paid, acquisition or abandonment of secured property, cancellation of debt, or contributions you made to an IRA.

Use Form W-9 only if you are a U.S. person (including a resident alien), to provide your correct TIN to the person requesting it (the requester) and, when applicable, to:

1. Certify that the TIN you are giving is correct (or you are waiting for a number to be issued),
2. Certify that you are not subject to backup withholding, or
3. Claim exemption from backup withholding if you are a U.S. exempt payee. If applicable, you are also certifying that as a U.S. person, your allocable share of any partnership income from a U.S. trade or business is not subject to the withholding tax on foreign partners' share of effectively connected income.

Note. If a requester gives you a form other than Form W-9 to request your TIN, you must use the requester's form if it is substantially similar to this Form W-9.

**Definition of a U.S. person.** For federal tax purposes, you are considered a U.S. person if you are:

- An individual who is a U.S. citizen or U.S. resident alien,
- A partnership, corporation, company, or association created or organized in the United States or under the laws of the United States,
- An estate (other than a foreign estate), or
- A domestic trust (as defined in Regulations section 301.7701-7).

**Special rules for partnerships.** Partnerships that conduct a trade or business in the United States are generally required to pay a withholding tax on any foreign partners' share of income from such business. Further, in certain cases where a Form W-9 has not been received, a partnership is required to presume that a partner is a foreign person, and pay the withholding tax. Therefore, if you are a U.S. person that is a partner in a partnership conducting a trade or business in the United States, provide Form W-9 to the partnership to establish your U.S. status and avoid withholding on your share of partnership income.

The person who gives Form W-9 to the partnership for purposes of establishing its U.S. status and avoiding withholding on its allocable share of net income from the partnership conducting a trade or business in the United States is in the following cases:

- The U.S. owner of a disregarded entity and not the entity.

Company ID Number: 47130

the Employer issues a tentative nonconfirmation based upon a photo non-match. The Employer will determine whether the employee contests the tentative nonconfirmation as soon as possible after the Employer receives it.

4. If the employee contests a tentative nonconfirmation issued by DHS, the Employer will provide the employee with a referral letter and instruct the employee to contact the Department through its toll-free hotline within 8 Federal Government work days.

5. If the employee contests a tentative nonconfirmation based upon a photo non-match, the Employer will provide the employee with a referral letter to DHS. DHS will electronically transmit the result of the referral to the Employer within 10 Federal Government work days of the referral unless it determines that more than 10 days is necessary.

6. The Employer agrees that if an employee contests a tentative nonconfirmation based upon a photo non-match, the Employer will send a copy of the employee's Form I-551 or Form I-766 to DHS for review by:

- Scanning and uploading the document, or
- Sending a photocopy of the document by an express mail account (furnished and paid for by DHS).

7. The Employer understands that if it cannot determine whether there is a photo match/non-match, the Employer is required to forward the employee's documentation to DHS by scanning and uploading, or by sending the document as described in the preceding paragraph, and resolving the case as specified by the Immigration Services Verifier at DHS who will determine the photo match or non-match.

## ARTICLE IV

### SERVICE PROVISIONS

The SSA and DHS will not charge the Employer for verification services performed under this MOU. The Employer is responsible for providing equipment needed to make inquiries. To access the E-Verify System, an Employer will need a personal computer with Internet access.

## ARTICLE V

### PARTIES

This MOU is effective upon the signature of all parties, and shall continue in effect for as long as the SSA and DHS conduct the E-Verify program unless modified in writing by the mutual consent of all parties, or terminated by any party upon 30 days prior written notice to the others. Any and all system enhancements to the E-Verify program by DHS or SSA, including but not limited to the E-Verify checking against additional data sources and instituting new verification procedures, will be covered under this MOU and will not cause the need for a supplemental MOU that outlines these changes. DHS agrees to train employers on all changes made to E-Verify through the use of mandatory refresher tutorials and updates to the E-Verify manual. Even

Company ID Number: 47130

without changes to E-Verify, the Department reserves the right to require employers to take mandatory refresher tutorials.

Termination by any party shall terminate the MOU as to all parties. The SSA or DHS may terminate this MOU without prior notice if deemed necessary because of the requirements of law or policy, or upon a determination by SSA or DHS that there has been a breach of system integrity or security by the Employer, or a failure on the part of the Employer to comply with established procedures or legal requirements. Some or all SSA and DHS responsibilities under this MOU may be performed by contractor(s), and SSA and DHS may adjust verification responsibilities between each other as they may determine.

Nothing in this MOU is intended, or should be construed, to create any right or benefit, substantive or procedural, enforceable at law by any third party against the United States, its agencies, officers, or employees, or against the Employer, its agents, officers, or employees.

Each party shall be solely responsible for defending any claim or action against it arising out of or related to E-Verify or this MOU, whether civil or criminal, and for any liability wherefrom, including (but not limited to) any dispute between the Employer and any other person or entity regarding the applicability of Section 403(d) of IIRIRA to any action taken or allegedly taken by the Employer.

The employer understands that the fact of its participation in E-Verify is not confidential information and may be disclosed as authorized or required by law and DHS or SSA policy, including but not limited to, Congressional oversight, E-Verify publicity and media inquiries, and responses to inquiries under the Freedom of Information Act (FOIA).

The foregoing constitutes the full agreement on this subject between the SSA, DHS, and the Employer.

The individuals whose signatures appear below represent that they are authorized to enter into this MOU on behalf of the Employer and DHS respectively.

**To be accepted as a participant in E-Verify, you should only sign the Employer's Section of the signature page. If you have any questions, contact E-Verify Operations at 888-464-4218.**

**Employer** Thompson Tractor Co., Inc.

**Frank M Wright**

Name (Please type or print) \_\_\_\_\_ Title \_\_\_\_\_

*Electronically Signed* \_\_\_\_\_ Date 07/11/2007 \_\_\_\_\_

Signature \_\_\_\_\_ Date \_\_\_\_\_

Department of Homeland Security – Verification Division

Company ID Number: 47130

**INFORMATION REQUIRED  
FOR THE E-VERIFY PROGRAM**

Information relating to your Company:

Company Name: Thompson Tractor Co., Inc.

Company Facility Address: 2401 Pinson Highway  
Birmingham, AL 35217

Company Alternate Address: P.O. Box 10367  
Birmingham, AL 35202-0367

County or Parish: JEFFERSON

Employer Identification Number: 630377478

North American Industry  
Classification Systems Code: 423

Parent Company: \_\_\_\_\_

Number of Employees: 1,000 to 2,499 Number of Sites Verified for: 5

Are you verifying for more than 1 site? If yes, please provide the number of sites verified for in each State.

• GEORGIA 5 site(s)

Information relating to the Program Administrator(s) for your Company on policy questions or operational problems:

Name: Kimberly A Stark  
Telephone Number: (205) 849 - 4279 Fax Number: (205) 849 - 4565  
E-mail Address: kimberlystark@thompsontractor.com

Name: Frank M Wright  
Telephone Number: (205) 849 - 4267 Fax Number: (205) 849 - 4854  
E-mail Address: frankwright@thompsontractor.com

Company ID Number: 47130

**USCIS Verification Division**

Name (Please type or print)	Title
<i>Electronically Signed</i>	07/11/2007
Signature	Date